



CITY OF GARDEN GROVE
FIRE DEPARTMENT

Tel: (714) 741-5600
Fax: (714) 741-5640

7/11/2016

Manasi Chavan
Vertex
(213) 400-5295

RE: Records Search for 13612 Harbor Blvd., Garden Grove CA

Dear: Manasi Chavan:

Enclosed are the records found concerning the history of the above-mentioned site(s), especially as it pertains to fire code violation history, permits, the use, storage, or disposal of hazardous substances, and the installation or removal of underground flammable or combustible liquid storage tanks.

The City of Garden Grove Fire Department has utilized its best efforts to locate the records requested. However, the City makes no representation as to the accuracy of the records or that all records requested were retained or located. The City does not provide records on spills, leaks or clean-up, as that information is provided through the County of Orange Health Dept.

Sincerely,

A handwritten signature in black ink, appearing to read 'Thanh Nguyen', written over a horizontal line.

Thanh Nguyen
Fire Captain/Senior Fire Protection Specialist

**Violation List for
MAACO #2582
13612 HARBOR Blvd**

Date Issued	Date Cleared	Code #	Violation Description
12/01/2004	01/15/2005	HSC 25505(c	Failure to submit Haz Mat inventory forms annually.
10/25/2006	11/01/2006	CFC 1001.5.	Service and tag Fire Extinguishers.- Front office & S/E Back shop ar
12/18/2012	01/15/2013	CFC 901.6	Service and tag Fire Extinguishers.
01/20/2016	03/01/2016	Title 19, Sec.	5 yr. certification on sprinkler / standpipe system.
01/20/2016	03/01/2016	CFC 901.6	Service and tag Fire Extinguishers.

		Max Daily Amount	Not Used/Used
Common Name	FUL THANE PAINT MIXING SYSTEM	100 Gallons	<input type="checkbox"/> <input type="checkbox"/>
Chemical Name	VARIOUS PAINTS, REDUCERS, ACCELERATORS	Map 1 Grid K-6, K	Delete <input type="checkbox"/> Modify <input type="checkbox"/>
Cas #	MIXTURE	Location	NORTHWEST SIDE OF BUILDING
Common Name	LIQUID WASTE	110 Gallons	<input type="checkbox"/> <input type="checkbox"/>
Chemical Name	LIQUID WASTE	Map 1 Grid K-4, K	Delete <input type="checkbox"/> Modify <input type="checkbox"/>
Cas #	67-64-1	Location	NORTHEAST END
Common Name	OXYGEN	249 Cubic Fee	<input type="checkbox"/> <input type="checkbox"/>
Chemical Name	OXYGEN	Map 1 Grid K-6, L	Delete <input type="checkbox"/> Modify <input type="checkbox"/>
Cas #	7782447	Location	SOUTHWEST CORNER OF BUILDING
Common Name	THREE POINT FIVE SEALER	-99 Gallons	<input type="checkbox"/> <input type="checkbox"/>
Chemical Name		Map Grid	Delete <input type="checkbox"/> Modify <input type="checkbox"/>
Cas #	MIXTURE	Location	NORTHWEST SIDE OF BUILDING
Common Name	THREE POINT FIVE SEALER - REDUCER	-99 Gallons	<input type="checkbox"/> <input type="checkbox"/>
Chemical Name		Map Grid	Delete <input type="checkbox"/> Modify <input type="checkbox"/>
Cas #	MIXTURE	Location	NORTHWEST SIDE OF BLDG.



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: 1 DAY PAINT & BODY Telephone: 714) 534-6411
Site Address: 13612 HARBOR BLVD EG 92843 Zip Code: 92843

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes.)

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name R. M. MOE

Signature [Handwritten Signature]

Job Title MANAGER / SALES

Date 04-29-2009



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: 1 DAY PAINT + BODY

Telephone: (714) 534-6411

Site Address: 13612 HARBOR BLVD.

Zip Code: 92643

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date,
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes.)

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name ROBERTO SIMENEL

Signature Roberto Jimenez

Job Title AREA MANAGER

Date 5/24/06



CITY OF GARDEN GROVE FIRE DEPARTMENT

11301 Acacia Parkway, Garden Grove, CA 92842 (714) 741-5600 (714) 741-5636

FORM 1

Hazardous Materials Business Information Form

Page of 3

BUSINESS INFORMATION										
FACILITY # (Supplied by GGFD)	3	0	0	3	5	002662	BEGINNING DATE	1	ENDING DATE	2
BUSINESS NAME	1-Day Paint & Body Centers, Inc.							4	BUSINESS PHONE	5
BUSINESS SITE ADDRESS	13612 Harbor Blvd.									
CITY	GARDEN GROVE					7	STATE	8	ZIP	9
DUN & BRADSTREET	—			10	SIC CODE (4 DIGIT.#)	7551		11	FIRE DISTRICT	12
COUNTY	ORANGE									
BUSINESS OPERATOR NAME	1-Day Paint & Body Centers, Inc.							14	OPERATOR'S PHONE	15

BUSINESS OWNER										
OWNER NAME	1-Day Paint & Body Centers Inc.							16	OWNER PHONE	17
OWNER MAILING ADDRESS	[REDACTED]									
CITY	[REDACTED]					19	STATE	20	ZIP	21

ENVIRONMENTAL CONTACT										
CONTACT NAME	Wiley LANGFORD							22	CONTACT PHONE	23
CONTACT MAILING ADDRESS	21801 S. Western Ave									
CITY	Torrance					25	STATE	26	ZIP	27

PRIMARY					EMERGENCY CONTACTS					SECONDARY				
NAME	Wiley LANGFORD				28	NAME	Armando Urzibe				33			
TITLE	Dir. of H.R.				29	TITLE	President				34			
BUSINESS PHONE	310 328-0390				30	BUSINESS PHONE	310 328-0390				35			
24-HR. PHONE	[REDACTED]				31	24-HR. PHONE	[REDACTED]				36			
PAGER #	—				32	PAGER #	—				37			

ADDITIONAL LOCALLY COLLECTED INFORMATION											
DESCRIBE THE TYPE OF BUSINESS OPERATION:	Auto Painting & Auto Body Repairing							38	TOTAL # OF EMPLOYEES	39	
BILLING ADDRESS (IF DIFFERENT FROM ABOVE)	Same							40	ATTENTION	41	
PROPERTY OWNER NAME	MM Partnership			42	ADDRESS	1400 Ashland Ave Claguen			43	PHONE	44
Certification: Based on my inquiry of those individuals responsible for obtaining the information, I certify under penalty of law that I have personally examined and am familiar with the information submitted and believe the information is true, accurate, and complete.											
SIGNATURE OF OWNER/OPERATOR OR DESIGNATED REPRESENTATIVE	Wiley LANGFORD							45	DATE	46	
NAME OF SIGNER (print)	Wiley LANGFORD				47	NAME OF DOCUMENT PREPARER (print)	Wiley LANGFORD				49
TITLE OF SIGNER	Dir. of H.R.				48	TITLE OF DOCUMENT PREPARER	Dir. of H.R.				50



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page 1 of 3 2

FACILITY ID#	300035002662	BUSINESS NAME	1-Day Paint & Body Centers, Inc.
--------------	--------------	---------------	----------------------------------

I. FACILITY INFORMATION

CHEMICAL LOCATION	Main Shop Area		
CONFIDENTIAL LOCATION EPCRA	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	MAP#	1
GRID#	K-6, I-6, K-4, B-5		

II. CHEMICAL INFORMATION

CHEMICAL NAME	WASTE <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	TRADE SECRET <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
COMMON NAME	* If EPCRA see instructions	
CAS #	* If EHS is "Yes", all amounts must be LBS	
TYPE (Check one item only)	RADIOACTIVE <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	CURIES
PHYSICAL STATE (Check one item only)	FED HAZARD CATEGORIES	
AVERAGE DAILY AMOUNT	ANNUAL WASTE AMOUNT	STATE WASTE CODE
UNITS	DAYS ON SITE	LARGEST CONTAINER
STORAGE CONTAINER (Check all that apply)		
STORAGE PRESSURE		
STORAGE TEMPERATURE		

%WT	HAZARDOUS COMPONENT (For mixture or waste only)	EHS	CAS #
1 0-15	Acetone	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	67-64-1
2 0-10	Toluene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	108-88-3
3 0-25	Xylene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1330-20-7
4 0-3	Ethyl Benzene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	100-41-4
5 0-2	Ethyl Sixcol Butyl Ether	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	111-76-2

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.


PLACARDING INFORMATION

UNDOT # 12763
 Refer to shipping papers or MSDS

DOT HAZARD CLASS
 Refer to shipping papers or MSDS

EPCRA YES NO

X
 If EPCRA, Please Sign Here

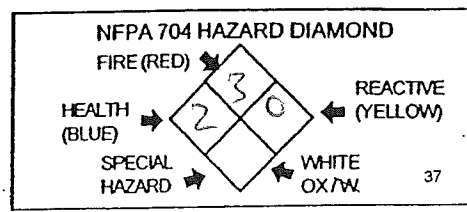

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page 3 of 3 2

FACILITY ID#	3003500266238	BUSINESS NAME	1-Day Airline Body Centers, Inc
--------------	---------------	---------------	---------------------------------

I. FACILITY INFORMATION

CHEMICAL LOCATION	Body Shop Arreg		
CONFIDENTIAL LOCATION EPCRA	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	MAP #	1
		GRID #	K-6, L-6

II. CHEMICAL INFORMATION


CHEMICAL NAME	Oxygen	WASTE	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	TRADE SECRET	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
COMMON NAME	Oxygen	* If EPCRA see instructions			
CAS #	07782447	FIRE CODE HAZARD CLASSES (supplied by GFD)	Oxidizer		
TYPE (Check one item only)	<input checked="" type="checkbox"/> a. PURE <input type="checkbox"/> b. MIXTURE <input type="checkbox"/> c. WASTE	RADIOACTIVE	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	CURIES	
PHYSICAL STATE (Check one item only)	<input type="checkbox"/> a. SOLID <input type="checkbox"/> b. LIQUID <input checked="" type="checkbox"/> c. GAS	FED HAZARD CATEGORIES	<input type="checkbox"/> a. FIRE <input type="checkbox"/> b. REACTIVE <input checked="" type="checkbox"/> c. PRESSURE RELEASE	<input type="checkbox"/> d. ACUTE HEALTH <input type="checkbox"/> e. CHRONIC HEALTH	
AVERAGE DAILY AMOUNT	125	MAXIMUM DAILY AMOUNT	249	ANNUAL WASTE AMOUNT	STATE WASTE CODE
UNITS	<input type="checkbox"/> a. GALLONS <input checked="" type="checkbox"/> b. CUBIC FEET <input type="checkbox"/> c. POUNDS <input type="checkbox"/> d. TONS	DAYS ON SITE	365	LARGEST CONTAINER	
STORAGE CONTAINER (Check all that apply)	<input type="checkbox"/> a. ABOVEGROUND TANK <input type="checkbox"/> b. UNDERGROUND TANK <input type="checkbox"/> c. TANK INSIDE BLDG <input type="checkbox"/> d. STEEL DRUM	<input type="checkbox"/> e. PLASTIC DRUM <input type="checkbox"/> f. NONMETALLIC DRUM <input type="checkbox"/> g. METAL CONTAINER <input type="checkbox"/> h. CARBOY	<input type="checkbox"/> i. VAT <input type="checkbox"/> j. FIBER DRUM <input type="checkbox"/> k. BAG(S) <input type="checkbox"/> l. BOX(S)	<input checked="" type="checkbox"/> m. CYLINDER <input type="checkbox"/> n. GLASS CONTAINER <input type="checkbox"/> o. PLASTIC CONTAINER <input type="checkbox"/> p. IN MACH OR EQUIP	<input type="checkbox"/> q. TANK WAGON <input type="checkbox"/> r. RAIL CAR <input type="checkbox"/> s. TOTE BIN <input type="checkbox"/> t. OTHER
STORAGE PRESSURE	<input type="checkbox"/> a. AMBIENT <input checked="" type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT				
STORAGE TEMPERATURE	<input checked="" type="checkbox"/> a. AMBIENT <input type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT <input type="checkbox"/> d. CRYOGENIC				

%WT	HAZARDOUS COMPONENT (For mixture or waste only)	EHS	CAS #
100	Oxygen	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	07782447
29		<input type="checkbox"/> Yes <input type="checkbox"/> No	
29		<input type="checkbox"/> Yes <input type="checkbox"/> No	
29		<input type="checkbox"/> Yes <input type="checkbox"/> No	
29		<input type="checkbox"/> Yes <input type="checkbox"/> No	
29		<input type="checkbox"/> Yes <input type="checkbox"/> No	

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.

PLACARDING INFORMATION

UNDOT #	1072	33
Refer to shipping papers or MSDS		
DOT HAZARD CLASS	2.2	34
Refer to shipping papers or MSDS		
EPCRA	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	35
X		36
If EPCRA, Please Sign Here		

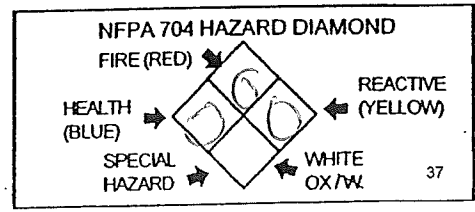

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page 2 of 3 2

FACILITY ID#	30035002662	BUSINESS NAME	1-Day Paintz Body Centers, Inc.
--------------	-------------	---------------	---------------------------------

I. FACILITY INFORMATION

CHEMICAL LOCATION	PAINT SHOP area		
CONFIDENTIAL LOCATION EPCRA	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	MAP #	1
		GRID #	K-4, K-5

II. CHEMICAL INFORMATION

CHEMICAL NAME	Liquid waste	WASTE	<input checked="" type="checkbox"/> Yes	TRADE SECRET	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
COMMON NAME	Liquid waste			An EHS Chemical	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
CAS #	67-64-1	FIRE CODE HAZARD CLASSES (supplied by GGFD)	Flammable Liquids		
TYPE (Check one item only)	<input type="checkbox"/> a. PURE <input checked="" type="checkbox"/> b. MIXTURE <input type="checkbox"/> c. WASTE	RADIOACTIVE	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	CURIES	
PHYSICAL STATE (Check one item only)	<input type="checkbox"/> a. SOLID <input checked="" type="checkbox"/> b. LIQUID <input type="checkbox"/> c. GAS	FED HAZARD CATEGORIES	<input checked="" type="checkbox"/> d. ACUTE HEALTH	<input type="checkbox"/> e. CHRONIC HEALTH	
AVERAGE DAILY AMOUNT	55 Gal.	MAXIMUM DAILY AMOUNT	110 Gal.	ANNUAL WASTE AMOUNT	275 Gal.
				STATE WASTE CODE	214
UNITS	<input checked="" type="checkbox"/> a. GALLONS <input type="checkbox"/> b. CUBIC FEET <input type="checkbox"/> c. POUNDS <input type="checkbox"/> d. TONS	DAYS ON SITE	365	LARGEST CONTAINER	50 Gal.
STORAGE CONTAINER (Check all that apply)	<input type="checkbox"/> a. ABOVEGROUND TANK <input type="checkbox"/> b. UNDERGROUND TANK <input type="checkbox"/> c. TANK INSIDE BLDG <input checked="" type="checkbox"/> d. STEEL DRUM	<input type="checkbox"/> e. PLASTIC DRUM <input type="checkbox"/> f. NONMETALLIC DRUM <input type="checkbox"/> g. METAL CONTAINER <input type="checkbox"/> h. CARBOY	<input type="checkbox"/> i. VAT <input type="checkbox"/> j. FIBER DRUM <input type="checkbox"/> k. BAG(S) <input type="checkbox"/> l. BOX(S)	<input type="checkbox"/> m. CYLINDER <input type="checkbox"/> n. GLASS CONTAINER <input type="checkbox"/> o. PLASTIC CONTAINER <input type="checkbox"/> p. IN MACH OR EQUIP	<input type="checkbox"/> q. TANK WAGON <input type="checkbox"/> r. RAIL CAR <input type="checkbox"/> s. TOTE BIN <input type="checkbox"/> t. OTHER
STORAGE PRESSURE	<input checked="" type="checkbox"/> a. AMBIENT <input type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT				
STORAGE TEMPERATURE	<input checked="" type="checkbox"/> a. AMBIENT <input type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT <input type="checkbox"/> d. CRYOGENIC				

%WT	HAZARDOUS COMPONENT (For mixture or waste only)	EHS	CAS #
1 0-15 ²⁹	acetone	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	67-64-1
2 0-10 ²⁹	Toluene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	108-88-3
3 0-25 ²⁹	Xylene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1330-20-7
4 0-3 ²⁹	Ethyl Benzene	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	100-41-4
5 0-2 ²⁹	Ethyl Sixcol Butyl Ether	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	111-76-2

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.


PLACARDING INFORMATION

UNDOT # _____ Refer to shipping papers or MSDS

DOT HAZARD CLASS 214 Refer to shipping papers or MSDS

EPCRA YES NO

X _____ If EPCRA, Please Sign Here

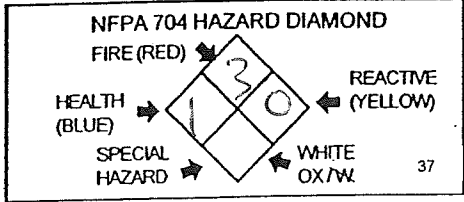

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED

MSDS 28-5

January 1, 2002

Product Name	Product ID	Exposure	Health Hazard	Physical Hazard	Other
PETROLEUM NAPHTHA	64742-89-8	50.0 @ 25.0°C	O 400.0 ppm 15 min STEL D 100.0 ppm A 300.0 ppm O 300.0 ppm		Respiral particle
QUINACRIDONEQUINONE GOLD	1503-48-6				None A None O None
PHTHALOCYANINE BLUE PIGMENT	147-14-8	None	O 5.0 mg/m ³ TWA Respirable PNOR O 15.0 mg/m ³ Total Dust PNOR A 10.0 mg/m ³ Inhalable particu PNOC A 3.0 mg/m ³ Respirable partic PNOC		None A 10.0 m O None
QUINOPHTHALONE YELLOW PIGMENT	30125-47-4				None A 100.0 O 100.0 D 50.0 p 8 & 12 hr TWA
STODDARD SOLVENT	8052-41-3				None A None O None
PHTHALOCYANINE GREEN PIGMENT	14302-13-7	None	A None O None		None A 10.0 m O None
QUINACRIDONEQUINONE GOLD	1503-48-6				None A 10.0 m D 5.0 mg Respirable D 10.0 m Total Dust O 15.0 m Total Dust
PIGMENT RED 202	3089-17-6	None	O 15.0 mg/m ³ Total Dust PNOR O 5.0 mg/m ³ Respirable Dust PNOR A 3.0 mg/m ³ Particulate		None A 10.0 m D 5.0 mg Respirable D 10.0 m Total Dust O 15.0 m Total Dust
TITANIUM DIOXIDE	13463-67-7				None A 10.0 m D 5.0 mg Respirable D 10.0 m Total Dust O 15.0 m Total Dust
POLYESTER RESIN-B	68604-67-1	None	A None O None		22.0 O 300.0 p CEIL O 200.0 p D 50.0 pp 8 & 12 hou TWA A 50.0 pp Skin O 500.0 p 10 min TV Maximum
POLYOL RESIN	Not Avail	None	A None O None		12.0 O 400.0 p 15 min ST D 100.0 p A 300.0 pp O 300.0 p
POLYVINYL BUTYRALDEHYDE	68648-78-2	None	O 15.0 mg/m ³ O 15.0 mg/m ³ Respirable A None		9.0 @ 25.0°C A 100.0 pp TWA A 150.0 pp 15 min STI D 150.0 pp 15 min STI O 100.0 pp D 100.0 pp 8 & 12 hou TWA
PROPYLENE GLYCOL MONOMETHYL ETHER ACETATE	108-65-6	3.7	D 10.0 ppm 12 hr TWA A None O None		
QUINACRIDONE PIGMENT	1047-16-1	None	O 15.0 mg/m ³ Total Dust PNOR A 10.0 mg/m ³ Inhalible particle A 3.0 mg/m ³		
VM&P NAPHTHA	64742-89-8				
XYLENE	1330-20-7	9.0 @ 25.0°C			

DuPont Performance Coatings
MATERIAL SAFETY DATA SHEET
NASON TINTS, TONERS AND BINDERS

SECTION 1 - Product and Company Identification

Manufacturer: E.I. DuPont de Nemours & Co.
 DuPont Performance Coatings
 Wilmington, DE, 19898

Telephone: Product Information: (800) 441-7515
 Medical Emergency: (800) 441-3637
 Transportation Emergency: (800) 424-9300
 (CHEMTREC)

Product: **NASON TINTS, TONERS AND BINDERS**

DOT Shipping Name: See DOT addendum.

Hazardous Materials Information: See Section 10.

Metal Du:
 Al
 O 15.0 n
 Metal Du:
 Al

ANTHRAQUINONE PIGMENT

Not Avail None

A 10.0 m
 O None

AROMATIC HYDROCARBON-A

64742-94-5 10.0

D 100.0 f
 A None
 O None

AROMATIC HYDROCARBON-B

64742-95-6 10.0 @ 25.0° C

D 50.0 pp
 A None
 O None

SECTION 2 - Composition, Information on Ingredients

INGREDIENTS	CAS #	VAPOR PRESSURE	EXPOSURE LIMITS			
ACETONE	67-64-1	180.0@68.0°F	A 750.0 ppm 15 min STEL A 500.0 ppm O 1000.0 ppm D 500.0 ppm 8 & 12 hour TWA	AROMATIC NAPHTHA	68477-31-6	1.0 A None O None
ACRYLIC POLYMER-A	Not Avail	5.0 @ 25.0°C	A None O None	BARIUM SULFATE	7727-43-7	None D 10.0 mg, A 10.0 mg/ Total Dust O 15.0 mg/ Total Dust O 5.0 mg/r Respirable I
ACRYLIC POLYMER-B	69215-54-9	None	A None O None	BIS(1,2,2,6,6-PENTAMETHYL-4-PIPERDINYL) SEBACATE	41556-26-7	None A None O None
ACRYLIC POLYMER-C	96591-17-2	None	A None O None	BUTYL ACETATE	123-86-4	10.0 A 200.0 ppr 15 min STEL A 150.0 ppr O 150.0 ppr
ALKYD RESIN-A	Not Avail	None	A None O None	C.I. PIGMENT BLUE 15:2	68987-63-3	None A None O None
ALKYD RESIN-C	67763-06-8	None	A None O None	CARBAZOLE VIOLET PIGMENT	Not Avail	None A None O None
ALKYD RESIN-D	68071-84-1	None	A None O None	CARBON BLACK	1333-86-4	None A 3.5 mg/m ³ O 3.5 mg/m ³ D 0.5 mg/m ³ 8 & 12 hour TWA
ALUMINUM	7429-90-5	10.0 @ 25.0°C	A 10.0 mg/m ³ O None	CELLULOSE ACETATE BUTYRATE	9004-36-8	None A None O None
ALUMINUM BENZOATE	555-32-8	None	A 15.0 mg/m ³	CHROMIUM(III) OXIDE (2:3)		

DuPont Performance Coatings
MATERIAL SAFETY DATA SHEET
NASON TINTS, TONERS AND BINDERS

SECTION 1 - Product and Company Identification

Manufacturer: E.I. DuPont de Nemours & Co.
 DuPont Performance Coatings
 Wilmington, DE, 19898

Telephone: Product Information: (800) 441-7515
 Medical Emergency: (800) 441-3637
 Transportation Emergency: (800) 424-9300
 (CHEMTREC)

Product: **NASON TINTS, TONERS AND BINDERS**

DOT Shipping Name: See DOT addendum.

Hazardous Materials Information: See Section 10.

SECTION 2 - Composition, Information on Ingredients

INGREDIENTS	CAS #	VAPOR PRESSURE	EXPOSURE LIMITS				
ACETONE	67-64-1	180.0@68.0°F	A 750.0 ppm 15 min STEL A 500.0 ppm O 1000.0 ppm D 500.0 ppm 8 & 12 hour TWA	ANTHRAQUINONE PIGMENT	Not Avail	None	Metal Dust Al O 15.0 mg/m ³ Metal Dust Al A 10.0 mg/m ³ O None
ACRYLIC POLYMER-A	Not Avail	5.0 @ 25.0°C	A None O None	AROMATIC HYDROCARBON-A	64742-94-5	10.0	D 100.0 mg/m ³ A None O None
ACRYLIC POLYMER-B	69215-54-9	None	A None O None	AROMATIC HYDROCARBON-B	64742-95-6	10.0 @ 25.0° C	D 50.0 mg/m ³ A None O None
ACRYLIC POLYMER-C	96591-17-2	None	A None O None	AROMATIC NAPHTHA	68477-31-6	1.0	A None O None
ALKYD RESIN-A	Not Avail	None	A None O None	BARIUM SULFATE	7727-43-7	None	D 10.0 mg/m ³ A 10.0 mg/m ³ Total Dust O 15.0 mg/m ³ Total Dust O 5.0 mg/l Respirable
ALKYD RESIN-C	67763-06-8	None	A None O None	BIS(1,2,2,6,6-PENTAMETHYL-4-PIPERIDINYL) SEBACATE	41556-26-7	None	A None O None
ALKYD RESIN-D	68071-84-1	None	A None O None	BUTYL ACETATE	123-86-4	10.0	A 200.0 ppm 15 min STEL A 150.0 ppm O 150.0 ppm
ALUMINUM	7429-90-5	10.0 @ 25.0°C	A 10.0 mg/m ³ O None	C.I. PIGMENT BLUE 15:2	68987-63-3	None	A None O None
ALUMINUM BENZOATE	555-32-8	None	A 15.0 mg/m ³	CARBAZOLE VIOLET PIGMENT	Not Avail	None	A None O None
				CARBON BLACK	1333-86-4	None	A 3.5 mg/m ³ O 3.5 mg/m ³ D 0.5 mg/m ³ 8 & 12 hour TWA
				CELLULOSE ACETATE BUTYRATE	9004-36-8	None	A None O None
				CHROMIUM(III) OXIDE (2:3)			

MSDS 28-5
January 1, 2002

PETROLEUM NAPHTHA	64742-89-8	50.0 @ 25.0°C	O 400.0 ppm 15 min STEL D 100.0 ppm A 300.0 ppm O 300.0 ppm	QUINACRIDONEQUINONE GOLD	1503-48-6	None	A None O None	Respirab particle
PHTHALOCYANINE BLUE PIGMENT	147-14-8	None	O 5.0 mg/m ³ TWA Respirable PNOR O 15.0 mg/m ³ Total Dust PNOR A 10.0 mg/m ³ Inhalable particu PNOC A 3.0 mg/m ³ Respirable partic PNOC	QUINOPHTHALONE YELLOW PIGMENT	30125-47-4	None	A 10.0 m O None	
PHTHALOCYANINE GREEN PIGMENT	14302-13-7	None	A None O None	STODDARD SOLVENT	8052-41-3	None	A 100.0 f O 100.0 p D 50.0 pp 8 & 12 ho TWA	
PIGMENT RED 202	3089-17-6	None	O 15.0 mg/m ³ Total Dust PNOR O 5.0 mg/m ³ Respirable Dust PNOR A 3.0 mg/m ³ Particulate	SUBSTITUTED BENZOTRIAZOLE	25973-55-1	None	A None O None	
POLYESTER RESIN-B	68604-67-1	None	A None O None	TETRACHLOROISONSOLINONE YELLOW PIGMENT	5590-18-1	None	A 10.0 mg O None	
POLYOL RESIN	Not Avail	None	A None O None	TITANIUM DIOXIDE	13463-67-7	None	A 10.0 mg D 5.0 mg/ Respirable D 10.0 mg Total Dust O 15.0 mg Total Dust	
POLYVINYL BUTYRALDEHYDE	68648-78-2	None	O 15.0 mg/m ³ O 15.0 mg/m ³ Respirable A None	TOLUENE	108-88-3	22.0	O 300.0 pp CEIL O 200.0 pp D 50.0 pp 8 & 12 hou TWA A 50.0 pp Skin O 500.0 pp 10 min TW Maximum	
PROPYLENE GLYCOL MONOMETHYL ETHER ACETATE	108-65-6	3.7	D 10.0 ppm 12 hr TWA A None O None	VM&P NAPHTHA	64742-89-8	12.0	O 400.0 pp 15 min STEL D 100.0 pp A 300.0 pp O 300.0 pp	
QUINACRIDONE PIGMENT	1047-16-1	None	O 15.0 mg/m ³ Total Dust PNOR A 10.0 mg/m ³ Inhalible particle A 3.0 mg/m ³	XYLENE	1330-20-7	9.0 @ 25.0°C	A 100.0 pp TWA A 150.0 pp 15 min STEL D 150.0 pp 15 min STEL O 100.0 pp D 100.0 pp 8 & 12 hour TWA	

GARDEN GROVE



FIRE DEPARTMENT

HAZARDOUS MATERIALS DISCLOSURE PROGRAM

REPORTING FORMS PACKET: PART 2

BUSINESS EMERGENCY PLAN SHORT VERSION

THE FOLLOWING FORMS ARE FOR USE IN THE EVENT OF AN
ACTUAL OR THREATENING HAZARDOUS MATERIALS EMERGENCY.

FILL THESE FORMS OUT COMPLETELY AND BE READY TO
HAND THEM TO THE FIRE DEPARTMENT PERSONNEL WHEN
THEY ARRIVE AT THE EMERGENCY SCENE.

IN THE EVENT OF AN EMERGENCY,

CALL 911

GARDEN GROVE FIRE DEPARTMENT HAZARDOUS MATERIALS DISCLOSURE PROGRAM

BUSINESS EMERGENCY PLAN

All businesses using, handling or storing hazardous materials that are required to disclose must complete a Business Emergency Plan. The occupancy groups listed below will be permitted to complete a short version of the business plan. The completion of the short form shall be considered the application required in the Health and Safety Code, Title 20, Chapter 6.95, Section 25503.5.

The Chief of the Garden Grove Fire Department in the role of the Administering Agency, allows the following types of businesses to file the short version of the Business Emergency Plan.

1. Gasoline/Diesel service stations. S-3 occupancies.
2. Repair Garages. H-4 occupancies.
3. Dry Cleaners
4. Businesses, at the Fire Chief's discretion, with less than 10 employees and using materials that are not considered highly or acutely toxic.

The Fire Chief exempts the following portions from the business plan. These exemptions have been established because the materials used in the above-mentioned occupancies are common knowledge to first responding units. The materials pose no significant, unexpected hazard nor do they affect the ability of the administering agency to effectively respond to their release of a hazardous material, and that there are unusual circumstances justifying this exemption.

Exemptions

1. Detailed evacuation plans.
2. Detailed key employee responsibilities.
3. Training outline.
4. Detailed prevention outline.

The following Short Business Emergency Plan must be completed in order for the exemption to be granted.

GARDEN GROVE FIRE DEPARTMENT
HAZARDOUS MATERIALS DISCLOSURE PROGRAM

BUSINESS EMERGENCY PLAN

Personnel Emergency Notifications and Responsibilities

Employee Evacuation and Staging Areas:

1. The type of alarm signal that will be used to initiate an evacuation at the facility: (vocal, paging system, manual alarm, etc.)
-

2. All employees shall be trained to evacuate the facility through at least one exit. Alternate exit routes shall be designated if available.
3. Staging areas shall be designated for all employees. Staging areas will be the location that all employees shall report to in the event of an emergency.

One person shall be designated to account for all personnel at the staging area. That person will be responsible for meeting the incoming Fire units and reporting the conditions known about the incident.

The Staging area is at the following location as shown on your site plan map.

Employee Responsibilities:

At least one employee shall be responsible for the following minimum requirements in the event of an emergency response by the Fire Department.

1. Notify employees. Initiate evacuation procedures.
 2. Notify the Garden Grove Fire Department. Dial 911
 3. Try to identify the nature of the incident.
 4. Report to the staging area and account for evacuated employees.
 5. Report to the incoming fire units.
 6. Activate any emergency mitigation procedures that are available at your business. (List below any mitigation procedures specific to your business, if any.)
-
-

GARDEN GROVE FIRE DEPARTMENT
HAZARDOUS MATERIALS DISCLOSURE PROGRAM

BUSINESS EMERGENCY PLAN

Personnel Emergency Notifications and Responsibilities

Training Requirements

State law requires training of employees where the business uses, handles or stores hazardous materials.

Employee training provided on:

- Appointment of person/persons on site who are trained in key role positions. Emergency coordinator, evacuation coordinators, staging area supervisors and documenting officers.
- Procedures to follow during a release or threatened release of a hazardous material (evacuation to staging areas).
- Information contained in material safety data sheets.
- Warning labels/placards.
- Safe work practices.
- Use of on site emergency equipment and supplies.
- Use and location of personal protective equipment.
- Any chemical, hazardous material or substance that could be encountered in his/her work area.
- On-site alarm system for evacuation.
- Discuss possible release of hazardous materials scenario.

Emergency Notifications

A handler of hazardous materials is required to immediately report any release or threatened release of hazardous materials to the Garden Grove Fire Department. Failure to do so may result in criminal and/or civil prosecution.

Required Notifications

In the event of a release or threatened release of hazardous materials, it is state law to notify each of the following agencies:

<u>Agency</u>	<u>Phone Numbers</u>
Garden Grove Fire Department, Police, Paramedics	911
Office of Emergency Services (OES)	(800) 852-7550 OR (916) 427-4341
National Response Center	(800) 424-8802

GARDEN GROVE FIRE DEPARTMENT
HAZARDOUS MATERIALS DISCLOSURE PROGRAM

BUSINESS EMERGENCY PLAN

Personnel Emergency Notifications and Responsibilities

Prevention

All materials are stored, used and handled within the guidelines of the Uniform Fire Code, N.F.P.A. standards, California Administrative Code, Titles 19 and 20.

This section is meant to initiate a Prevention Plan at your business and to assist in preventing a release, or threatened release, of a hazardous material. In the spaces provided, place a checkmark by the preventive actions which have been initiated by your business to abate hazards relating to hazardous material handling, use of storage.

Consideration shall include:

1. Drum storage and/or above ground tank storage areas:
 - a___ Isolation and separation of incompatible materials
 - b___ Diking areas to contain spills
 - c___ Storage on paved ground
2. Compressed and/or cryogenic gas storage areas:
 - a___ Cylinders stored upright and secured
 - b___ Isolation and/or separation of incompatible cylinders (oxygen and flammable gases, etc.)
3. General:
 - a___ Safe work practices are exercised in daily routines.
 - b___ Employees who handle hazardous materials are properly trained.
 - c___ Material Safety Data Sheets (MSDS) readily available for each hazardous material on the premises.
 - d___ Labeling of all materials and storage areas with the product name and hazards associated with the product (drums, piping, tanks, etc.)
 - e___ Uniform Fire Code (UFC) requires separation between outside hazardous material storage area or tanks and combustible materials (wood, bush, etc.)
 - f___ Posting of "No Smoking" signs where appropriate.

GARDEN GROVE FIRE DEPARTMENT

BUSINESS EMERGENCY PLAN

A BUSINESS IS REQUIRED BY LAW TO NOTIFY THE GARDEN GROVE FIRE DEPARTMENT WITHIN 30 DAYS OF ANY OF THE FOLLOWING EVENTS:

1. Change of business address.
2. Change of business ownership
3. Change of business name
4. Cessation of business operation (quitting business)
5. Use or handling of a previously undisclosed hazardous material
6. A 100% increase in the quantity of a previously disclosed hazardous material

Your business is required by State law to retain a copy of this entire Business Plan, chemical inventory, material safety data sheets and site maps, for review by Fire Department personnel. State where your disclosure and Emergency Business Plan will be kept.

Show location on site map also using symbol in the legend.

Note: A fee is charged for a replacement copy from the Garden Grove Fire Department.

I CERTIFY, UNDER PENALTY OF PERJURY, THAT THE ENCLOSED INFORMATION IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE.

SIGNATURE: Wiley Langford
NAME: Wiley Langford
TITLE: Dir. of H.R.
DATE: 11/29/2004



STATE OF CALIFORNIA

Gary Ho
Accredited Inspector

Department of Industrial Relations
Division of Occupational Safety and Health
Pressure Vessels
2100 East Katella, Suite 265
Anaheim, CA 92806-6040

(714) 939-0434

FAX (714) 939-1601



GARDEN GROVE FIRE DEPARTMENT ENVIRONMENTAL PROTECTION SECTION

11301 Acacia Parkway Garden Grove, CA 92840

Business: 714 741-5600 Haz Mar: 714 741-5636

Hazardous Materials Business Emergency Plan And Inventory Certification Statement

Business Name: ONE DAY PAINT & BODY Telephone: 714/534-6411
Site Address: 13612 Harbor Blvd Cg G Zip Code: 92643

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

- 1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
- The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
- There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
- No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED. (Please check applicable boxes):

- [X] No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
[] All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
[X] No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
[] All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name Wiley LANGFORD

Signature Wiley Langford

Job Title Dir. of H.R.

Date 6/22/01

White Copy - Return to Garden Grove Fire Department

Yellow Copy -- Retain for Business Records

MAILING ADDRESS: 1-DAY PAINT & BODY CTRS.INC. P.O. BOX 3037 TORRANCE, CA 90510 3037

UNIFIED PROGRAM CONSOLIDATED FORM

FACILITY INFORMATION

BUSINESS ACTIVITIES

I. FACILITY IDENTIFICATION

FACILITY ID#	1. EPA ID # (Hazardous Waste Only)	2.
Permit# 990755	MLI No. 28284	
BUSINESS NAME (Same as FACILITY NAME or DBA-Doing Business As)		
Same as facility name.		

II. ACTIVITIES DECLARATION

NOTE: If you check YES to any part of this list, please submit the Business Owner/Operator Identification page (OES Form 2730)

Does your facility... If Yes, please complete these pages of the UPOF...

A. HAZARDOUS MATERIALS			
Have on site (for any purpose) hazardous materials at or above 55 gallons for liquids, 500 pounds for solids, or 200 cubic feet for compressed gases (include liquids in ASTs and USTs); or the applicable Federal threshold quantity for an extremely hazardous substance specified in 40 CFR Part 355, Appendix A or B; or handle radiological materials in quantities for which an emergency plan is required pursuant to 10 CFR Parts 30, 40 or 70?	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	4.	<input checked="" type="checkbox"/> HAZARDOUS MATERIALS INVENTORY - CHEMICAL DESCRIPTION (OES 2731)
B. UNDERGROUND STORAGE TANKS (USTs)			
1. Own or operate underground storage tanks?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	5.	<input checked="" type="checkbox"/> UST FACILITY (Formerly SWRCB Form A)
2. Intent to upgrade existing or install new USTs?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	6.	<input checked="" type="checkbox"/> UST TANK (one page per tank) (Formerly Form B)
3. Need to report closing a UST?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	7.	<input checked="" type="checkbox"/> UST FACILITY <input checked="" type="checkbox"/> UST TANK (one per tank) <input checked="" type="checkbox"/> UST INSTALLATION - CERTIFICATE OF COMPLIANCE (one page per tank) (Formerly Form C) <input checked="" type="checkbox"/> UST TANK (closure portion-one page per tank)
C. ABOVE GROUND PETROLEUM STORAGE TANKS (ASTs)			
Own or operate ASTs above these thresholds: - any tank capacity is greater than 660 gallons, or - the total aggregate capacity for the entire facility (ASTs, drums and portable containers) greater than 1,320 gallons?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	8.	<input checked="" type="checkbox"/> NO FORM REQUIRED TO CUPAS
D. HAZARDOUS WASTE			
1. Generate hazardous waste?	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	9.	<input checked="" type="checkbox"/> EPA ID NUMBER - provide at the top of this page
2. Recycle more than 100 kg/month of excluded or exempted recyclable materials (per HSC §25143.2)?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	10.	<input checked="" type="checkbox"/> RECYCLABLE MATERIALS REPORT (one per recycler)
3. Treat hazardous waste on site?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	11.	<input checked="" type="checkbox"/> ONSITE HAZARDOUS WASTE TREATMENT - FACILITY (Formerly DTSC Forms 1772) <input checked="" type="checkbox"/> ONSITE HAZARDOUS WASTE TREATMENT - UNIT (one page per unit) (Formerly DTSC Forms 1772A,B,C,D and L)
4. Treatment subject to financial assurance requirements (for Permit by Rule and Condition Authorization)?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	12.	<input checked="" type="checkbox"/> CERTIFICATION OF FINANCIAL ASSURANCE (Formerly DTSC Form 1232)
5. Consolidate hazardous waste generated at a remote site?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	13.	<input checked="" type="checkbox"/> REMOTE WASTE/CONSOLIDATION SITE ANNUAL NOTIFICATION (Formerly DTSC Form 1196)
6. Need to report the closure/removal of a tank that was classified waste and cleaned onsite?	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	14.	<input checked="" type="checkbox"/> HAZARDOUS WASTE TANK CLOSURE CERTIFICATION (Formerly DTSC Form 1249)
E. LOCAL REQUIREMENTS			15.

(You may also be required to provide additional information by your CUPA or local agency.)



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: 1-Day Paint & Body Centers, Inc. Telephone: 714 534-6411
Site Address: 13612 Harbor Blvd, Garden, Ca Zip Code: 92643

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes):

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name Wiley L. Langford

Signature Wiley L. Langford

Job Title Dir. of H.R.

Date 5/15/2010

***** SECTION I *****

Manufacturer: E.I. DuPont de Nemours & Co., (Inc.)
Automotive
Wilmington, Delaware 19898

Telephone: Product Information (800) 441-7515
Medical emergency (800) 441-3637
Transportation emergency (800) 424-9300 (CHEMTREC)

IDENTITY: 'FUL-BASE' DEEP BRIGHT RED

PRODUCT CODE: 430-52 FORMULA DATE: 941221

OSHA NAME: FLAMMABLE LIQUID

HMS: H=2, F=3, R=0

***** SECTION II - INGREDIENTS *****

ING#	CAS NO.	SEC. 313	INGREDIENT
001	68604-67-1		POLYESTER RESIN
002	123-86-4		BUTYL ACETATE
003	108-88-3	14 %	TOLUENE
004	64742-89-8		VM&P NAPHTHA
005	1330-20-7	2 %	XYLENE
006	1047-16-1		QUINACRIDONE PIGMENT

Section 313 Supplier Notification

The chemicals listed above with percentages are subject to the reporting requirements of Section 313 of the Emergency Planning and Right-To-Know Act of 1986 and of 40 CFR 372.

ING#	VAPOR PRESSURE MM HG	EXPOSURE LIMITS		
		ACGIH	OSHA	
001	UNKNOWN	ACGIH	NONE	
		OSHA	NONE	
002	8.00	ACGIH	150.0 PPM	
	20 DEG (C)	OSHA	150.0 PPM	
		ACGIH	200.0 PPM	15 MIN(STEL)
		OSHA	200.0 PPM	15 MIN(STEL)
003	36.70	ACGIH	50.0 PPM	SKIN
	20 DEG (C)	OSHA	200.0 PPM	
		OSHA	300.0 PPM	CEILING
		OSHA	500.0 PPM	10 MIN MAX
		DUPONT	50.0 PPM	8&12 HR TWA

***** SECTION II CONTINUED *****

004	50.00	ACGIH	300.0 PPM	
	25 DEG (C)	OSHA	300.0 PPM	
		OSHA	400.0 PPM	15MIN(STEL)
		DUPONT	100.0 PPM	
005	25.00	ACGIH	100.0 PPM	
	25 DEG (C)	OSHA	100.0 PPM	
		ACGIH	150.0 PPM	15 MIN(STEL)
		OSHA	150.0 PPM	15 MIN(STEL)
006	NOT APP	ACGIH	10.0 MG/M3	
		OSHA	15.0 MG/M3	
		OSHA	5.0 MG/M3	RESPIRABLE

***** SECTION III - PHYSICAL DATA *****

EVAPORATION RATE	VAPOR DENSITY	SOLUBILITY OF SOLVENT
SLOWER THAN ETHER	HEAVIER THAN AIR	SYSTEM IN WATER
PERCENT VOLATILE BY VOLUME	APPROX. BOILING RANGE	WEIGHT PER GALLON
73.1	88-155 DEG (C)	7.91
PERCENT VOLATILE BY WEIGHT	PERCENT SOLIDS	V.O.C. THEORETICAL
65.1	34.8	5.1

***** SECTION IV - FIRE & EXPLOSION DATA *****

FLASH POINT (METHOD)	APPROX. FLAMMABLE LIMITS
BETWEEN 20 - 73 F (CC)	LEL 1.0 % UEL 7.6 %

Extinguishing media: foam , carbon dioxide, dry chemical

Special fire fighting procedures: full protective equipment, including self-contained breathing apparatus, is recommended. Water from fog nozzles may be used to prevent pressure build-up.

Unusual fire & explosion hazards: when heated above the flashpoint, emits flammable vapors which, when mixed with air, can burn or be explosive. Fine mist or sprays may be flammable at temperatures below the flash point.

***** SECTION V - HEALTH HAZARD DATA *****

ROUTE OF ENTRY	SYMPTOMS/EFFECTS AND FIRST AID
----------------	--------------------------------

Inhalation: May cause nose and throat irritation . May cause nervous system depression characterized by the following

***** SECTION V CONTINUED *****

progressive steps: headache, dizziness, nausea, staggering gait, confusion, unconsciousness.

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage.

Skin or eye contact: May cause irritation or burning of the eyes. Repeated or prolonged liquid contact may cause skin irritation with discomfort and dermatitis.

OTHER POTENTIAL HAZARDS INCLUDE:**BUTYL ACETATE**

May cause abnormal liver function.

Tests for embryotoxic activity in animals has been inconclusive.

Has been toxic to the fetus in laboratory animals at doses that are toxic to the mother.

TOLUENE

Recurrent overexposure may result in liver and kidney injury.

High airborne levels have produced irregular heart beats in animals and occasional palpitations in humans.

Rats exposed to very high airborne levels have exhibited high frequency hearing deficits. The significance of this to man is unknown.

WARNING: This chemical is known to the State of California to cause birth defects or other reproductive harm.

VM&P NAPHTHA

Laboratory studies with rats have shown that petroleum distillates cause kidney damage and kidney or liver tumors. These effects were not seen in similar studies with guinea pigs, dogs, or monkeys. Several studies evaluating petroleum workers have not shown a significant increase of kidney damage or an increase in kidney or liver tumors.

KYLENE

High concentrations have caused embryotoxic effects in laboratory animals.

Recurrent overexposure may result in liver and kidney injury.

Can be absorbed through the skin in harmful amounts.

First Aid:

Inhalation: If affected by inhalation of vapor or spray mist, remove to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing difficulty persists, or occurs later, consult a physician.

***** SECTION V CONTINUED *****

Skin or eye: In case of contact, immediately flush with plenty of water for at least 15 minutes; call a physician. In case of skin contact, wash with soap and water. If irritation occurs, contact a physician.

Ingestion: Gastro-intestinal distress.
In the unlikely event of ingestion, call a physician immediately and have names of ingredients available.

Skin or eye contact: May cause irritation of the eyes. Repeated or prolonged skin contact may cause irritation. In case of eye contact, flush with plenty of water for at least 15 minutes, call a physician. For skin contact, wash with soap and water.

***** SECTION VI - REACTIVITY DATA *****

STABILITY
STABLE

Incompatibility (materials to avoid): None reasonably foreseeable.

Hazardous decomposition products: CO, CO₂, smoke, oxides of heavy metals reported in Section V.

Hazardous polymerization: Will not occur.

***** SECTION VII - SPILL OR LEAK PROCEDURES *****

Steps to be taken in case material is released or spilled: Ventilate area. Remove sources of ignition. Prevent skin contact and breathing of vapor. Confine and remove with inert absorbent.

Waste disposal method: Do not allow material to contaminate ground water systems. Incinerate absorbed material in accordance with Federal, State and local requirements. Do not incinerate in closed containers.

***** SECTION VIII - SPECIAL PROTECTION INFORMATION *****

Respiratory: Do not breathe vapors or mists. Wear a properly fitted vapor/particulate respirator approved by NIOSH/MSHA (TC-23C) for use with paints during application and until all vapors and spray mists are exhausted. Follow the respirator manufacturer's directions for respirator use.

Ventilation: Provide sufficient ventilation in volume and

***** SECTION VIII CONTINUED *****

pattern to keep contaminants below applicable OSHA requirements and other suggested exposure limits.

Protective clothing: Neoprene gloves and coveralls are recommended.

Eye protection: Goggles are preferred to prevent eye irritation. If safety glasses are substituted, include splash guard or side shields.

Protective creams: Do not use for protection. May be used for ease of clean up.

***** SECTION IX - SPECIAL PRECAUTIONS *****

Precautions to be taken in handling and storing: Observe label precautions. Keep away from heat, sparks and flame. Close container after each use. Ground containers when pouring. Wash thoroughly after handling and before eating or smoking. Do not store above 120 deg F.

Other precautions: Do not sand, flame cut, braze or weld dry coating without a NIOSH/MSHA approved respirator or appropriate ventilation.

***** SECTION X - NOTES *****

NOTICE FROM DUPONT

The data in this material safety data sheet relate only to the specific material designated herein and do not relate to use in combination with any other material or any process.

Product Manager

***** SECTION I *****

Manufacturer: E.I. DuPont de Nemours & Co., (Inc.)
Automotive
Wilmington, Delaware 19898

Telephone: Product Information (800) 441-7515
Medical emergency (800) 441-3637
Transportation emergency (800) 424-9300 (CHEMTREC)

IDENTITY: CRYSTAL FROST WHITE TONER

PRODUCT CODE: 430-53 FORMULA DATE: 940726

OSHA NAME: FLAMMABLE LIQUID

HMIS: H=2, F=3, R=0

***** SECTION II - INGREDIENTS *****

ING#	CAS NO.	SEC. 313	INGREDIENT
001	68604-67-1		POLYESTER RESIN
002	123-86-4		BUTYL ACETATE
003	64742-89-8		VM&P NAPHTHA
004	1330-20-7	3 %	XYLENE
005	13463-67-7		TITANIUM DIOXIDE

Section 313 Supplier Notification
The chemicals listed above with percentages are subject to the reporting requirements of Section 313 of the Emergency Planning and Right-To-Know Act of 1986 and of 40 CFR 372.

ING#	VAPOR PRESSURE MM HG	EXPOSURE LIMITS		
		ACGIH	OSHA	
001	UNKNOWN	ACGIH NONE	OSHA NONE	
002	8.00 20 DEG (C)	ACGIH	150.0 PPM	
		OSHA	150.0 PPM	
		ACGIH	200.0 PPM	15 MIN(STEL)
		OSHA	200.0 PPM	15 MIN(STEL)
003	50.00 25 DEG (C)	ACGIH	300.0 PPM	
		OSHA	300.0 PPM	
		OSHA	400.0 PPM	15MIN(STEL)
		DUPONT	100.0 PPM	
004	25.00 25 DEG (C)	ACGIH	100.0 PPM	
		OSHA	100.0 PPM	
		ACGIH	150.0 PPM	15 MIN(STEL)

***** SECTION II CONTINUED *****

	OSHA	150.0 PPM	15 MIN(STEL)
005	NOT APP	ACGIH	10.0 MG/M3
		OSHA	15.0 MG/M3
		DUPONT	10.0 MG/M3

***** SECTION III - PHYSICAL DATA *****

EVAPORATION RATE SLOWER THAN ETHER	VAPOR DENSITY HEAVIER THAN AIR	SOLUBILITY OF SOLVENT SYSTEM IN WATER
PERCENT VOLATILE BY VOLUME 66.0	APPROX. BOILING RANGE 88-155 DEG (C)	WEIGHT PER GALLON 10.47
PERCENT VOLATILE BY WEIGHT 44.2	PERCENT SOLIDS 55.7	V.O.C. THEORETICAL 4.6

***** SECTION IV - FIRE & EXPLOSION DATA *****

FLASH POINT (METHOD) BETWEEN 20 - 73 F (CC)	APPROX. FLAMMABLE LIMITS LEL 1.0 % UEL 7.6 %
--	---

Extinguishing media: foam , carbon dioxide, dry chemical

Special fire fighting procedures: full protective equipment, including self-contained breathing apparatus, is recommended. Water from fog nozzles may be used to prevent pressure build-up.

Unusual fire & explosion hazards: when heated above the flashpoint, emits flammable vapors which, when mixed with air, can burn or be explosive. Fine mist or sprays may be flammable at temperatures below the flash point.

***** SECTION V - HEALTH HAZARD DATA *****

ROUTE OF ENTRY	SYMPTOMS/EFFECTS AND FIRST AID
----------------	--------------------------------

Inhalation: May cause nose and throat irritation . May cause nervous system depression characterized by the following progressive steps: headache, dizziness, nausea, staggering gait, confusion, unconsciousness.

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage.

Skin or eye contact: May cause irritation or burning of the eyes. Repeated or prolonged liquid contact may cause skin

***** SECTION V CONTINUED *****

Irritation with discomfort and dermatitis.

OTHER POTENTIAL HAZARDS INCLUDE:

BUTYL ACETATE

May cause abnormal liver function.
Tests for embryotoxic activity in animals has been inconclusive.
Has been toxic to the fetus in laboratory animals at doses that are toxic to the mother.

VM&P NAPHTHA

Laboratory studies with rats have shown that petroleum distillates cause kidney damage and kidney or liver tumors. These effects were not seen in similar studies with guinea pigs, dogs, or monkeys. Several studies evaluating petroleum workers have not shown a significant increase of kidney damage or an increase in kidney or liver tumors.

XYLENE

High concentrations have caused embryotoxic effects in laboratory animals.
Recurrent overexposure may result in liver and kidney injury.
Can be absorbed through the skin in harmful amounts.

TITANIUM DIOXIDE

In a lifetime inhalation test, lung cancers were found in some rats exposed to 250 mg/m³ respirable titanium dust. Analysis of the titanium dioxide concentrations in the rat's lungs showed that the lung clearance mechanism was overwhelmed and that the results at the massive 250 mg/m³ level are not relevant to the workplace.

First Aid:

Inhalation: If affected by inhalation of vapor or spray mist, remove to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing difficulty persists, or occurs later, consult a physician.

Skin or eye: In case of contact, immediately flush with plenty of water for at least 15 minutes; call a physician. In case of skin contact, wash with soap and water. If irritation occurs, contact a physician.

Ingestion: Gastro-intestinal distress.

In the unlikely event of ingestion, call a physician immediately and have names of ingredients available.

Skin or eye contact: May cause irritation of the eyes. Repeated or prolonged skin contact may cause irritation.

***** SECTION V CONTINUED *****

In case of eye contact, flush with plenty of water for at least 15 minutes, call a physician. For skin contact, wash with soap and water.

***** SECTION VI - REACTIVITY DATA *****

STABILITY
STABLE

Incompatibility (materials to avoid): None reasonably foreseeable.

Hazardous decomposition products: CO, CO₂, smoke, oxides of heavy metals reported in Section V.

Hazardous polymerization: Will not occur.

***** SECTION VII - SPILL OR LEAK PROCEDURES *****

Steps to be taken in case material is released or spilled: Ventilate area. Remove sources of ignition. Prevent skin contact and breathing of vapor. Confine and remove with inert absorbent.

Waste disposal method: Do not allow material to contaminate ground water systems. Incinerate absorbed material in accordance with Federal, State and local requirements. Do not incinerate in closed containers.

***** SECTION VIII - SPECIAL PROTECTION INFORMATION *****

Respiratory: Do not breathe vapors or mists. Wear a properly fitted vapor/particulate respirator approved by NIOSH/MSHA (TC-23C) for use with paints during application and until all vapors and spray mists are exhausted. Follow the respirator manufacturer's directions for respirator use.

Ventilation: Provide sufficient ventilation in volume and pattern to keep contaminants below applicable OSHA requirements and other suggested exposure limits.

Protective clothing: Neoprene gloves and coveralls are recommended.

Eye protection: Goggles are preferred to prevent eye irritation. If safety glasses are substituted, include splash guard or side shields.

Protective creams: Do not use for protection. May be used

***** SECTION VIII CONTINUED *****

for ease of clean up.

***** SECTION IX - SPECIAL PRECAUTIONS *****

Precautions to be taken in handling and storing: Observe label precautions. Keep away from heat, sparks and flame. Close container after each use. Ground containers when pouring. Wash thoroughly after handling and before eating or smoking. Do not store above 120 deg F.

Other precautions: Do not sand, flame cut, braze or weld dry coating without a NIOSH/MSHA approved respirator or appropriate ventilation.

***** SECTION X - NOTES *****

NOTICE FROM DUPONT

The data in this material safety data sheet relate only to the specific material designated herein and do not relate to use in combination with any other material or any process.

Product Manager

***** SECTION I *****

Manufacturer: E.I. DuPont de Nemours & Co., (Inc.)
Automotive
Wilmington, Delaware 19898

Telephone: Product Information (800) 441-7515
Medical emergency (800) 441-3637
Transportation emergency (800) 424-9300 (CHEMTREC)

IDENTITY: 'FUL-BASE' PURPLE PEARL

PRODUCT CODE: 430-54 FORMULA DATE: 940412

OSHA NAME: FLAMMABLE LIQUID

HMIS: H=2, F=3, R=0

***** SECTION II - INGREDIENTS *****

ING#	CAS NO.	SEC. 313	INGREDIENT
001	68604-67-1		POLYESTER RESIN
002	123-86-4		BUTYL ACETATE
003	108-88-3	5 %	TOLUENE
004	111-76-2	2 %	ETHYLENE GLYCOL MONOBUTYL ETHER
005	64742-89-8		VM&P NAPHTHA
006	1330-20-7	2 %	XYLENE
007	64742-94-5		AROMATIC HYDROCARBON
008	NOT AVAILABLE		MICA/TITANIUM DIOXIDE/TIN OXIDE

Section 313 Supplier Notification

The chemicals listed above with percentages are subject to the reporting requirements of Section 313 of the Emergency Planning and Right-To-Know Act of 1986 and of 40 CFR 372.

ING#	VAPOR PRESSURE MM HG	ACGIH OSHA	EXPOSURE LIMITS
001	UNKNOWN	ACGIH OSHA	NONE NONE
002	8.00 20 DEG (C)	ACGIH OSHA ACGIH OSHA	150.0 PPM 150.0 PPM 200.0 PPM 200.0 PPM 15 MIN(STEL) 15 MIN(STEL)
003	36.70 20 DEG (C)	ACGIH OSHA OSHA OSHA DUPONT	50.0 PPM 200.0 PPM 300.0 PPM 500.0 PPM 50.0 PPM SKIN CEILING 10 MIN MAX 8&12 HR TWA

***** SECTION II CONTINUED *****

004	.60	ACGIH	25.0 PPM	SKIN
	20 DEG (C)	OSHA	50.0 PPM	SKIN
		DUPONT	10.0 PPM	SKIN
005	50.00	ACGIH	300.0 PPM	
	25 DEG (C)	OSHA	300.0 PPM	
		OSHA	400.0 PPM	15MIN(STEL)
		DUPONT	100.0 PPM	
006	25.00	ACGIH	100.0 PPM	
	25 DEG (C)	OSHA	100.0 PPM	
		ACGIH	150.0 PPM	15 MIN(STEL)
		OSHA	150.0 PPM	15 MIN(STEL)
007	10.00	DUPONT	100.0 PPM	
	20 DEG (C)	ACGIH	NONE	
		OSHA	NONE	
008	NOT APP	ACGIH	3.0 MG/M3	RESPIRABLE MICA
		OSHA	3.0 MG/M3	RESPIRABLE MICA
		ACGIH	2.0 MG/M3	TIN OXIDE
		OSHA	2.0 MG/M3	TIN OXIDE

***** SECTION III - PHYSICAL DATA *****

EVAPORATION RATE SLOWER THAN ETHER	VAPOR DENSITY HEAVIER THAN AIR	SOLUBILITY OF SOLVENT SYSTEM IN WATER
PERCENT VOLATILE BY VOLUME 62.3	APPROX. BOILING RANGE 88-213 DEG (C)	WEIGHT PER GALLON 9.19
PERCENT VOLATILE BY WEIGHT 46.7	PERCENT SOLIDS 53.2	V.O.C. THEORETICAL 4.2

***** SECTION IV - FIRE & EXPLOSION DATA *****

FLASH POINT (METHOD) BETWEEN 20 - 73 F (CC)	APPROX. FLAMMABLE LIMITS LEL .8 % UEL 10.6 %
--	---

Extinguishing media: foam , carbon dioxide, dry chemical

Special fire fighting procedures: full protective equipment, including self-contained breathing apparatus, is recommended. Water from fog nozzles may be used to prevent pressure build-up.

Unusual fire & explosion hazards: when heated above the flashpoint, emits flammable vapors which, when mixed with air, can burn or be explosive. Fine mist or sprays may be

***** SECTION IV CONTINUED *****

Flammable at temperatures below the flash point.

***** SECTION V - HEALTH HAZARD DATA *****

ROUTE OF ENTRY SYMPTOMS/EFFECTS AND FIRST AID

Inhalation: May cause nose and throat irritation . May cause nervous system depression characterized by the following progressive steps: headache, dizziness, nausea, staggering gait, confusion, unconsciousness.

Reports have associated repeated and prolonged overexposure to solvents with permanent brain and nervous system damage.

Skin or eye contact: May cause irritation or burning of the eyes. Repeated or prolonged liquid contact may cause skin irritation with discomfort and dermatitis.

OTHER POTENTIAL HAZARDS INCLUDE:

BUTYL ACETATE

May cause abnormal liver function.
Tests for embryotoxic activity in animals has been inconclusive.
Has been toxic to the fetus in laboratory animals at doses that are toxic to the mother.

TOLUENE

Recurrent overexposure may result in liver and kidney injury.
High airborne levels have produced irregular heart beats in animals and occasional palpitations in humans.
Rats exposed to very high airborne levels have exhibited high frequency hearing deficits. The significance of this to man is unknown.
WARNING: This chemical is known to the State of California to cause birth defects or other reproductive harm.

ETHYLENE GLYCOL MONOBUTYL ETHER

Can be absorbed through the skin in harmful amounts.
May cause injury to the kidneys, liver, blood and/or bone marrow. Repeated overexposure may result in damage to the blood. Eye contact may cause corneal injury.
Has been toxic to the fetus in laboratory animals at doses that are toxic to the mother.

VM&P NAPHTHA

Laboratory studies with rats have shown that petroleum distillates cause kidney damage and kidney or liver tumors. These effects were not seen in similar studies with guinea pigs, dogs, or monkeys. Several studies evaluating petro-

***** SECTION V CONTINUED *****

leum workers have not shown a significant increase of kidney damage or an increase in kidney or liver tumors.

XYLENE

High concentrations have caused embryotoxic effects in laboratory animals.

Recurrent overexposure may result in liver and kidney injury.

Can be absorbed through the skin in harmful amounts.

First Aid:

Inhalation: If affected by inhalation of vapor or spray mist, remove to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing difficulty persists, or occurs later, consult a physician.

Skin or eye: In case of contact, immediately flush with plenty of water for at least 15 minutes; call a physician. In case of skin contact, wash with soap and water. If irritation occurs, contact a physician.

Ingestion: Gastro-intestinal distress.

In the unlikely event of ingestion, call a physician immediately and have names of ingredients available.

Skin or eye contact: May cause irritation of the eyes. Repeated or prolonged skin contact may cause irritation. In case of eye contact, flush with plenty of water for at least 15 minutes, call a physician. For skin contact, wash with soap and water.

***** SECTION VI - REACTIVITY DATA *****

STABILITY
STABLE

Incompatibility (materials to avoid): None reasonably foreseeable.

Hazardous decomposition products: CO, CO₂, smoke, oxides of heavy metals reported in Section V.

Hazardous polymerization: Will not occur.

***** SECTION VII - SPILL OR LEAK PROCEDURES *****

Steps to be taken in case material is released or spilled:
Ventilate area. Remove sources of ignition. Prevent skin contact and breathing of vapor. Confine and remove with