



CITY OF GARDEN GROVE
FIRE DEPARTMENT

Tel: (714) 741-5600
Fax: (714) 741-5640

4/5/17

Frank Trinidad
Odic Environmental
(213)380-0090

RE: Records Search for 8034 Garden Grove Blvd., Garden Grove CA

Dear Frank Trinidad:

Enclosed are the records found concerning the history of the above-mentioned site(s), especially as it pertains to fire code violation history, permits, the use, storage, or disposal of hazardous substances, and the installation or removal of underground flammable or combustible liquid storage tanks.

The City of Garden Grove Fire Department has utilized its best efforts to locate the records requested. However, the City makes no representation as to the accuracy of the records or that all records requested were retained or located. The City does not provide records on spills, leaks or clean-up, as that information is provided through the County of Orange Health Dept.

Sincerely,

A handwritten signature in black ink, appearing to read 'Brad Spell', written over a white background.

Brad Spell
Fire Captain/Senior Fire Protection Specialist

GARDEN GROVE



FIRE DEPARTMENT

HAZARDOUS MATERIALS DISCLOSURE PROGRAM

REPORTING FORMS PACKET

SHORT VERSION

FOR OFFICIAL USE ONLY	
FACILITY ID NO.	<u>9090</u>
BUSINESS NAME	<u>EXPRESS CARWASH & LUBE INC.</u>
BUSINESS ADDRESS	<u>8034 GARDEN GROVE BLVD.</u>
APPROVED BY _____	DATE <u>01/26/2011</u>
NEW BUSINESS <input type="checkbox"/> YES <input type="checkbox"/> NO	UPDATE <u>01/26/2014</u>
PICK <input type="checkbox"/> 4D <input type="checkbox"/> BUSLIST <input type="checkbox"/> CALARP:	<input type="checkbox"/> CUPA: <input type="checkbox"/> GIS <input type="checkbox"/>
FEE _____	



CITY OF GARDEN GROVE FIRE DEPARTMENT

11301 Acacia Parkway, Garden Grove, CA 92842 (714) 741-5600 (714) 741-5636

FORM 1

Hazardous Materials Business Information Form

Page _____ of _____ 3

BUSINESS INFORMATION

FACILITY # (Supplied by GGF)	3 0 0 3 5	BEGINNING DATE	11-01-09	1	ENDING DATE	12-31-09	2			
BUSINESS NAME	PLATINUM CAR WASH N LUBE				4	BUSINESS PHONE	714-892-8580	5		
BUSINESS SITE ADDRESS	8034 GARDEN GROVE BLVD							6		
CITY	GARDEN GROVE			7	STATE	CA	8	ZIP	92844	9
DUN & BRADSTREET	10	SIC CODE (4 DIGIT #)	7538	11	FIRE DISTRICT	12				
COUNTY	ORANGE							13		
BUSINESS OPERATOR NAME	EVER LEON <MGR>				14	OPERATOR'S PHONE	[REDACTED]		15	

BUSINESS OWNER

OWNER NAME	HUA CHEN INVESTMENT, INC.				16	OWNER PHONE	[REDACTED]		17	
OWNER MAILING ADDRESS	8034 GARDEN GROVE BLVD							18		
CITY	GARDEN GROVE			19	STATE	CA	20	ZIP	92844	21

ENVIRONMENTAL CONTACT

CONTACT NAME	Mahmond A. Elsayed				22	CONTACT PHONE	714-892-8580		23	
CONTACT MAILING ADDRESS	8034 GARDEN GROVE BLVD							24		
CITY	GARDEN GROVE			25	STATE	CA	26	ZIP	92844	27

PRIMARY

EMERGENCY CONTACTS

SECONDARY

NAME	Mahmoud A Elsayed			28	NAME	C. J DUAN			33
TITLE	MANAGER			29	TITLE	Officer			34
BUSINESS PHONE	714-892-8580			30	BUSINESS PHONE	714-892-8580			35
24-HR. PHONE	[REDACTED]			31	24-HR. PHONE	[REDACTED]			36
PAGER #	[REDACTED]			32	PAGER #	[REDACTED]			37

ADDITIONAL LOCALLY COLLECTED INFORMATION

DESCRIBE THE TYPE OF BUSINESS OPERATION:	WASH CAR & OIL CHANGES			38	TOTAL # OF EMPLOYEES	39					
BILLING ADDRESS (IF DIFFERENT FROM ABOVE)	[REDACTED]							40	ATTENTION	41	
PROPERTY OWNER NAME	GUI MEI JIN			42	ADDRESS	1628 HILLARD DR, SAN MARINO, CA 91088		43	PHONE	626-315-3633	44

Certification: Based on my inquiry of those individuals responsible for obtaining the information, I certify under penalty of law that I have personally examined and am familiar with the information submitted and believe the information is true, accurate, and complete.

SIGNATURE OF OWNER/OPERATOR OR DESIGNATED REPRESENTATIVE	[Signature]			45	DATE	10-29-2009			46
NAME OF SIGNER (print)	C. J DUAN			47	NAME OF DOCUMENT PREPARER (print)	C. J DUAN			49
TITLE OF SIGNER	OFFICER			48	TITLE OF DOCUMENT PREPARER	OFFICER			50



BUSINESS INFORMATION

FACILITY # <small>(Supplied by GCFO)</small>	3 0 0 3 5	BEGINNING DATE 01/19/2011	1	ENDING DATE	
BUSINESS NAME	EXPRESS CARWASH & LUBE, INC			4	BUSINESS PHONE (714) 893-1536
BUSINESS SITE ADDRESS	8034 GARDEN GROVE				
CITY	GARDEN GROVE	7	STATE CA	8	ZIP 92844
DUN & BRADSTREET	10	SIC CODE (4 DIGIT #)	11	FIRE DISTRICT	
COUNTY	ORANGE				
BUSINESS OPERATOR NAME	RAFSIL F. BITAR (RALPH)			14	OPERATOR'S PHONE [REDACTED]

BUSINESS OWNER

OWNER NAME	RAFSIL F. BITAR			16	OWNER PHONE [REDACTED]
OWNER MAILING ADDRESS	15 VIA ONAGRU				
CITY	RANCHO SANTA MARGARITA	19	STATE CA	20	ZIP 92688

ENVIRONMENTAL CONTACT

CONTACT NAME	SAME			22	CONTACT PHONE
CONTACT MAILING ADDRESS					
CITY		25	STATE	26	ZIP

EMERGENCY CONTACTS

PRIMARY	SECONDARY
28 NAME RALPH BITAR	28 NAME MARY BITAR
29 TITLE General MNGR	29 TITLE Asst.
30 BUSINESS PHONE (714) 893-1536	30 BUSINESS PHONE (949) 635-6874
31 24-HR. PHONE [REDACTED]	31 24-HR. PHONE [REDACTED]
32 PAGER #	32 PAGER #

ADDITIONAL LOCALLY COLLECTED INFORMATION

DESCRIBE THE TYPE OF BUSINESS OPERATION: CARWASH & AUTOMOTIVE LUBE	38	TOTAL # OF EMPLOYEES 12	39
BILLING ADDRESS (IF DIFFERENT FROM ABOVE) SAME AS ABOVE	40	ATTENTION	41
PROPERTY OWNER NAME SAME AS ABOVE	42	ADDRESS	44

Certification: Based on my inquiry of those individuals responsible for obtaining the information, I certify under penalty of law that I have personally examined and am familiar with the information submitted and believe the information is true, accurate, and complete.

SIGNATURE OF OWNER, OPERATOR, OR DESIGNATED REPRESENTATIVE [Signature]	45	DATE 1/19/2011	46
NAME OF SIGNER (print) RAFSIL F. BITAR	47	NAME OF DOCUMENT PREPARER (print)	49
TITLE OF SIGNER PRESIDENT	48	TITLE OF DOCUMENT PREPARER	50



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page _____ of _____ 2

FACILITY ID: 30035 BUSINESS NAME: PLATINUM CAR WASH & LUBE

I. FACILITY INFORMATION

CHEMICAL LOCATION: 8034 GARDEN GROVE BLVD., GARDEN GROVE, CA 92844 (LUBE AREA)

CONFIDENTIAL LOCATION EPCRA: Yes No 5 MAP # 6 GRID # 7

II. CHEMICAL INFORMATION

CHEMICAL NAME: ATF-3 WASTE: Yes 8 TRADE SECRET: Yes No 11

COMMON NAME: AUTOMATIC TRANSMISSION FLUID An EHS Chemical: Yes No 12

GAS #: 64741-88-4 FIRE CODE HAZARD CLASSES (supplied by GGFD): 10

TYPE (Check one item only): a. PURE b. MIXTURE c. WASTE 14 RADIOACTIVE: Yes No 15 CURIES: 16

PHYSICAL STATE (Check one item only): a. SOLID b. LIQUID c. GAS 17 RED HAZARD CATEGORIES: a. FIRE b. REACTIVE c. PRESSURE RELEASE d. ACUTE HEALTH e. CHRONIC HEALTH 18

AVERAGE DAILY AMOUNT: 50 GAL 19 MAXIMUM DAILY AMOUNT: 110 GAL 20 ANNUAL WASTE AMOUNT: 21 STATE WASTE CODE: 22

UNITS: a. GALLONS b. CUBIC FEET c. POUNDS d. TONS 23 DAYS ON SITE: 365 24 LARGEST CONTAINER: 200 GAL TANK 25

STORAGE CONTAINER (Check all that apply): a. ABOVEGROUND TANK b. UNDERGROUND TANK c. TANK INSIDE BLDG d. STEEL DRUM e. PLASTIC DRUM f. NONMETALLIC DRUM g. METAL CONTAINER h. CARBOY i. VAT j. FIBER DRUM k. BAG(S) l. BOX(S) m. CYLINDER n. GLASS CONTAINER o. PLASTIC CONTAINER p. IN MACH OR EQUIP q. TANK WAGON r. RAIL CAR s. TOTE BIN t. OTHER 26

STORAGE PRESSURE: a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT 27

STORAGE TEMPERATURE: a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT d. CRYOGENIC 28

HAZARDOUS COMPONENT (For mixture or waste only)

%WT	HAZARDOUS COMPONENT	EHS	CAS #
1	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
2	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
3	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
4	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
5	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.			


PLACARDING INFORMATION

UNDOT # _____ Refer to shipping papers or MSDS 33

DOT HAZARD CLASS _____ Refer to shipping papers or MSDS 34

EPCRA YES NO 35

X _____ If EPCRA, Please Sign Here 36

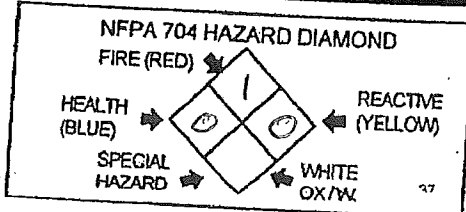

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



ATF-3

Material Safety Data Sheet

1. Product and Company Identification


Product Name: ATF-3
MSDS Number: 723670
Intended Use: Automatic Transmission Fluid
Manufacturer/Supplier: ConocoPhillips Lubricants
600 N. Dairy Ashford
Houston, Texas 77079-1175
Emergency Health and Safety Number: Chemtrec: 800-424-9300 (24 Hours)
Customer Service: 888-766-7676
Technical Information: 800-255-9556
MSDS Information: Internet: <http://w3.conocophillips.com/NetMSDS/>

2. Hazards Identification

Emergency Overview

NFPA

This material is not considered hazardous according to OSHA criteria.



Appearance: Red
Physical Form: Liquid
Odor: Petroleum

Potential Health Effects

Eye: Contact may cause mild eye irritation including stinging, watering, and redness.

Skin: Contact may cause mild skin irritation including redness and a burning sensation. Prolonged or repeated contact can defat the skin, causing drying and cracking of the skin, and possibly dermatitis (inflammation). No harmful effects from skin absorption are expected.

Inhalation (Breathing): No information available on acute toxicity.

Ingestion (Swallowing): No harmful effects expected from ingestion.

Signs and Symptoms: Effects of overexposure may include irritation of the digestive tract, nausea and diarrhea. Inhalation of oil mist or vapors at elevated temperatures may cause respiratory irritation.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include skin disorders.

See Section 11 for additional Toxicity Information.

3. Composition / Information on Ingredients

Component	CASRN	Concentration*
Lubricant Base Oil (Petroleum)	VARIOUS	>90
Additives	PROPRIETARY	<10

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First Aid Measures

Eye Contact: If irritation or redness develops from exposure, flush eyes with clean water. If symptoms persist, seek medical attention.

Skin Contact: Remove contaminated shoes and clothing and cleanse affected area(s) thoroughly by washing with mild soap and water or a waterless hand cleaner. If irritation or redness develops and persists, seek medical attention.

Inhalation (Breathing): If respiratory symptoms develop, move victim away from source of exposure and into fresh air in a position comfortable for breathing. If symptoms persist, seek medical attention.

Ingestion (Swallowing): First aid is not normally required; however, if swallowed and symptoms develop, seek medical attention.

Notes to Physician: Acute aspirations of large amounts of oil-laden material may produce a serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

5. Fire-Fighting Measures

NFPA 704 Hazard Class

Health: 0 Flammability: 1 Instability: 0 (0-Minimal, 1-Slight, 2-Moderate, 3-Serious, 4-Severe)

Unusual Fire & Explosion Hazards: This material may burn, but will not ignite readily. If container is not properly cooled, it can rupture in the heat of a fire.

Extinguishing Media: Dry chemical, carbon dioxide, foam, or water spray is recommended. Water or foam may cause frothing of materials heated above 212°F. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area and keep unauthorized personnel out. Stop spill/release if it can be done safely. Move undamaged containers from immediate hazard area if it can be done safely. Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done safely. Avoid spreading burning liquid with water used for cooling purposes.

Hazardous Combustion Products: Combustion may yield smoke, carbon monoxide, and other products of incomplete combustion. Oxides of sulfur, nitrogen or phosphorus may also be formed.

See Section 9 for Flammable Properties including Flash Point and Flammable (Explosive) Limits

6. Accidental Release Measures

Personal Precautions: This material may burn, but will not ignite readily. Keep all sources of ignition away from spill/release. The use of explosion-proof electrical equipment is recommended. Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Wear appropriate protective equipment, including respiratory protection, as conditions warrant (see Section 8). See Sections 2 and 7 for additional information on hazards and precautionary measures.

Environmental Precautions: Stop spill/release if it can be done safely. Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Use water sparingly to minimize environmental contamination and reduce disposal requirements. Spills into or upon navigable waters, the contiguous zone, or adjoining shorelines that cause a sheen or discoloration on the surface of the water, may require notification of the National Response Center (phone number 800-424-8802).

Methods for Containment and Clean-Up: Notify relevant authorities in accordance with all applicable regulations. Immediate cleanup of any spill is recommended. Dike far ahead of spill for later recovery or disposal. Absorb spill with inert material such as sand or vermiculite, and place in suitable container for disposal.

7. Handling and Storage

Precautions for safe handling: Wash thoroughly after handling. Use good personal hygiene practices and wear appropriate personal protective equipment.

Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. Do not wear contaminated clothing or shoes.

"Empty" containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. "Empty" drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations. Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSI Z49.1, and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

Conditions for safe storage: Keep container(s) tightly closed. Use and store this material in cool, dry, well-ventilated area away from heat and all sources of ignition. Store only in approved containers. Keep away from any incompatible material (see Section 10). Protect container(s) against physical damage.

8. Exposure Controls / Personal Protection

Component	US-ACGIH	OSHA	Other
Lubricant Base Oil (Petroleum)	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if generated	TWA: 5 mg/m ³ as Oil Mist, if generated	---

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits, additional engineering controls may be required.

Eye/Face Protection: The use of eye protection that meets or exceeds ANSI Z.87.1 is recommended to protect against potential eye contact, irritation, or injury. Depending on conditions of use, a face shield may be necessary.

Skin/Hand Protection: The use of gloves impervious to the specific material handled is advised to prevent skin contact. Users should check with manufacturers to confirm the breakthrough performance of their products. Suggested protective materials: Nitrile

Respiratory Protection: Where there is potential for airborne exposure above the exposure limit a NIOSH certified air purifying respirator equipped with R or P95 filters may be used.

A respiratory protection program that meets or is equivalent to OSHA 29 CFR 1910.134 and ANSI Z88.2 should be followed whenever workplace conditions warrant a respirator's use. Air purifying respirators provide limited protection and cannot be used in atmospheres that exceed the maximum use concentration (as directed by regulation or the manufacturer's instructions), in oxygen deficient (less than 19.5 percent oxygen) situations, or under conditions that are immediately dangerous to life and health (IDLH).

Suggestions provided in this section for exposure control and specific types of protective equipment are based on readily available information. Users should consult with the specific manufacturer to confirm the performance of their protective equipment. Specific situations may require consultation with industrial hygiene, safety, or engineering professionals.

9. Physical and Chemical Properties

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1 atm). Data represent typical values and are not intended to be specifications.

Appearance:	Red
Physical Form:	Liquid
Odor:	Petroleum
Odor Threshold:	No data

pH:	Not applicable
Vapor Pressure:	<1 mm Hg
Vapor Density (air=1):	>1
Boiling Point/Range:	No data
Melting/Freezing Point:	No data
Solubility in Water:	Negligible
Partition Coefficient (n-octanol/water) (Kow):	No data
Specific Gravity:	0.86 - 0.87 @ 60°F (15.6°C)
Bulk Density:	7.17 - 7.25 lbs/gal
Viscosity:	7.1 - 8.1 cSt @ 100°C; 30.0 - 39.4 cSt @ 40°C
Percent Volatile:	Negligible
Evaporation Rate (nBuAc=1):	<1
Flash Point:	Minimum 315°F / 157°C
Test Method:	Pensky-Martens Closed Cup (PMCC), ASTM D93, EPA 1010
LEL (vol % in air):	No data
UEL (vol % in air):	No data
Autoignition Temperature:	No data

10. Stability and Reactivity

Stability: Stable under normal ambient and anticipated conditions of use.

Conditions to Avoid: Extended exposure to high temperatures can cause decomposition.

Materials to Avoid (Incompatible Materials): Avoid contact with strong oxidizing agents and strong reducing agents.

Hazardous Decomposition Products: Not anticipated under normal conditions of use.

Hazardous Polymerization: Not known to occur.

11. Toxicological Information

Chronic Data:

Lubricant Base Oil (Petroleum)

Carcinogenicity: The petroleum base oils contained in this product have been highly refined by a variety of processes including severe hydrocracking/hydroprocessing to reduce aromatics and improve performance characteristics. All of the oils meet the IP-346 criteria of less than 3 percent PAH's and are not considered carcinogens by NTP, IARC, or OSHA.

Acute Data:

Component	Oral LD50	Dermal LD50	Inhalation LC50
Lubricant Base Oil (Petroleum)	>5 g/kg	>2 g/kg	No data

12. Ecological Information

Ecotoxicity: Experimental studies show that acute aquatic toxicity values are greater than 1000 mg/l. These values are consistent with the predicted aquatic toxicity of these substances based on their hydrocarbon compositions.

Mobility: Volatilization to air is not expected to be a significant fate process due to the low vapor pressure of this material. In water, base oils will float and spread over the surface at a rate dependent upon viscosity. There will be significant removal of hydrocarbons from the water by sediment adsorption. In soil and sediment, hydrocarbon components will show low mobility with adsorption to sediments being the predominant physical process. The main fate process is expected to be slow biodegradation of base oil components in soil and sediment.

Persistence and degradability: The hydrocarbons in this material are not readily biodegradable, but since they can be degraded by microorganisms, they are regarded as inherently biodegradable.

Bioaccumulation Potential: Log Kow values measured for the hydrocarbon components of this material range from 4 to over 6, and therefore regarded as having the potential to bioaccumulate. In practice, metabolic processes may reduce bioconcentration.

13. Disposal Considerations

13. Disposal Considerations

The generator of a waste is always responsible for making proper hazardous waste determinations and needs to consider state and local requirements in addition to federal regulations.

This material, if discarded as produced, would not be a federally regulated RCRA "listed" hazardous waste and is not believed to exhibit characteristics of hazardous waste. See Sections 7 and 8 for information on handling, storage and personal protection and Section 9 for physical/chemical properties. It is possible that the material as produced contains constituents which are not required to be listed in the MSDS but could affect the hazardous waste determination. Additionally, use which results in chemical or physical change of this material could subject it to regulation as a hazardous waste.

This material under most intended uses would become "Used Oil" due to contamination by physical or chemical impurities. Whenever possible, Recycle Used Oil in accordance with applicable federal and state or local regulations. Container contents should be completely used and containers should be emptied prior to discard.

14. Transportation Information

U.S. Department of Transportation (DOT)

Shipping Description: *Not regulated*
 Note: *If shipped by land in a packaging having a capacity of 3,500 gallons or more, the provisions of 49 CFR, Part 130 apply. (Contains oil)*

International Maritime Dangerous Goods (IMDG)

Shipping Description: *Not regulated*
 Note: *U.S. DOT compliance requirements may apply. See 49 CFR 171.22, 23 & 25.*

International Civil Aviation Org. / International Air Transport Assoc. (ICAO/IATA)

UN/ID #: *Not regulated*
 Note: *U.S. DOT compliance requirements may apply. See 49 CFR 171.22, 23 & 24.*

	LTD. QTY	Passenger Aircraft	Cargo Aircraft Only
Packaging Instruction #:	---	---	---
Max. Net Qty. Per Package:	---	---	---

15. Regulatory Information

CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs (in pounds):

This material does not contain any chemicals subject to the reporting requirements of SARA 302 and 40 CFR-372.

CERCLA/SARA - Section 311/312 (Title III Hazard Categories)

Acute Health: No
 Chronic Health: No
 Fire Hazard: No
 Pressure Hazard: No
 Reactive Hazard: No

CERCLA/SARA - Section 313 and 40 CFR 372:

This material does not contain any chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372.

EPA (CERCLA) Reportable Quantity (in pounds):

This material does not contain any chemicals with CERCLA Reportable Quantities.

California Proposition 65:

This material does not contain any chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm at concentrations that trigger the warning requirements of California Proposition 65.

Canadian Regulations:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the Regulations.

WHMIS Hazard Class

None

National Chemical Inventories:

All components are either listed on the US TSCA Inventory, or are not regulated under TSCA.

All components are either on the DSL, or are exempt from DSL listing requirements.

U.S. Export Control Classification Number: EAR99

16. Other Information**References used in compiling safety data sheet information:**

Dangerous Substances Directive 67/548/EEC

Date of Issue:	02-Sep-2008
Status:	Final
Previous Issue Date:	31-Mar-2008
Revised Sections or Basis for Revision:	Composition (Section 3) Physical Properties (Section 9)
MSDS Number:	723670

Guide to Abbreviations:

ACGIH = American Conference of Governmental Industrial Hygienists; ADR = Agreement on Dangerous Goods by Road; CASRN = Chemical Abstracts Service Registry Number; CEILING = Ceiling Limit (15 minutes); EINECS - European Inventory of Existing Commercial Chemical Substances; EPA = [US] Environmental Protection Agency; Germany-TRGS = Technical Rules for Dangerous Substances; IARC = International Agency for Research on Cancer; ICAO/IATA = International Civil Aviation Organization / International Air Transport Association; IMDG = International Maritime Dangerous Goods; Ireland-HSA = Ireland's National Health and Safety Authority; LEL = Lower Explosive Limit; N/A = Not Applicable; N/D = Not Determined; NTP = [US] National Toxicology Program; RID = Regulations Concerning the International Transport of Dangerous Goods by Rail; STEL = Short Term Exposure Limit (15 minutes); TLV = Threshold Limit Value; TWA = Time Weighted Average (8 hours); UEL = Upper Explosive Limit; UK-EH40 = United Kingdom EH40/2005 Workplace Exposure Limits

Disclaimer of Expressed and implied Warranties:

The information presented in this Material Safety Data Sheet is based on data believed to be accurate as of the date this Material Safety Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THIS PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page _____ of _____ 2

FACILITY ID# 30035 BUSINESS NAME PLATINUM CAR WASH & LUBE

I. FACILITY INFORMATION

CHEMICAL LOCATION 8034 GARDEN GROVE BLVD., GARDEN GROVE, CA 92844 (LUBE AREA)

CONFIDENTIAL LOCATION EPCRA Yes No 5 MAP # 6 GRID # 7

II. CHEMICAL INFORMATION

CHEMICAL NAME MOBIL 15W20, 10W30, 15W50, 5W20 WASTE Yes No 8 TRADE SECRET Yes No 11

COMMON NAME MOTOR OIL 9 An EHS Chemical Yes No 12 *If EPCRA see instructions *If EHS is "Yes", all amounts must be LBS

CAS # 10 FIRE CODE HAZARD CLASSES (supplied by GGFD) 13

TYPE (Check one item only) a. PURE b. MIXTURE c. WASTE 14 RADIOACTIVE Yes No 15 CURIES 16

PHYSICAL STATE (Check one item only) a. SOLID b. LIQUID c. GAS 17 FED HAZARD CATEGORIES a. FIRE b. REACTIVE c. PRESSURE RELEASE d. ACUTE HEALTH e. CHRONIC HEALTH 18

AVERAGE DAILY AMOUNT 20 GAL 19 MAXIMUM DAILY AMOUNT 45 GAL 20 ANNUAL WASTE AMOUNT 21 STATE WASTE CODE 22

UNITS a. GALLONS b. CUBIC FEET c. POUNDS d. TONS 23 DAYS ON SITE 365 24 LARGEST CONTAINER 100 GAL 25

STORAGE CONTAINER (Check all that apply) a. ABOVEGROUND TANK b. UNDERGROUND TANK c. TANK INSIDE BLDG d. STEEL DRUM e. PLASTIC DRUM f. NONMETALLIC DRUM g. METAL CONTAINER h. CARBOY i. VAT j. FIBER DRUM k. BAG(S) l. BOX(S) m. CYLINDER n. GLASS CONTAINER o. PLASTIC CONTAINER p. IN MACH OR EQUIP q. TANK WAGON r. RAIL CAR s. TOTE BIN t. OTHER 26

STORAGE PRESSURE a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT 27

STORAGE TEMPERATURE a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT d. CRYOGENIC 28

%WT	HAZARDOUS COMPONENT (For mixture or waste only)	EHS	CAS #
1	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
2	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
3	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
4	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
5	29	<input type="checkbox"/> Yes <input type="checkbox"/> No 30	31
		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No 30	31

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.


PLACARDING INFORMATION

UNDOT # _____ Refer to shipping papers or MSDS 33

DOT HAZARD CLASS _____ Refer to shipping papers or MSDS 34

EPCRA YES NO 35

X _____ If EPCRA, Please Sign Here 36

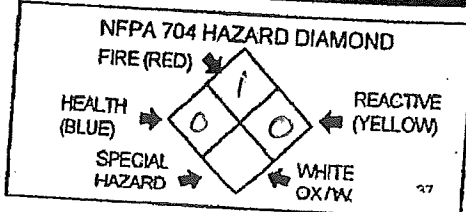

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED

Product Name: MOBIL 1 5W-30, 10W30, 15W50, 0W40, 5W20
Revision Date: 09Jan2009
Page 1 of 8

MATERIAL SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL 1 5W-30
Product Description: Synthetic Base Stocks and Additives
Product Code: 481119-00, 970056
Intended Use: Engine oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION
3225 GALLOWS RD.
FAIRFAX, VA. 22037 USA

24 Hour Health Emergency 609-737-4411
Transportation Emergency Phone 800-424-9300
ExxonMobil Transportation No. 281-834-3296
Product Technical Information 800-662-4525, 800-947-9147
MSDS Internet Address <http://www.exxon.com>, <http://www.mobil.com>

SECTION 2

COMPOSITION / INFORMATION ON INGREDIENTS

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3

HAZARDS IDENTIFICATION

This material is not considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

POTENTIAL HEALTH EFFECTS

Low order of toxicity. Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

NFPA Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0
HMIS Hazard ID:	Health: 0	Flammability: 1	Reactivity: 0

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4

FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use

Product Name: MOBIL 1 5W-30
Revision Date: 09Jan2009
Page 2 of 8

mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Smoke, Fume, Aldehydes, Sulfur oxides, Incomplete combustion products, Oxides of carbon

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200C (392F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6 ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

SPILL MANAGEMENT

Product Name: MOBIL 1 5W-30
Revision Date: 09Jan2009
Page 3 of 8

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Avoid contact with used product. Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is a static accumulator.

STORAGE

Do not store in open or unlabelled containers.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product: When mists / aerosols can occur, the following are recommended: 5 mg/m³ - ACGIH TLV, 10 mg/m³ - ACGIH STEL, 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator

Product Name: MOBIL 1 5W-30
Revision Date: 09Jan2009
Page 4 of 8

selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

GENERAL INFORMATION

Physical State: Liquid
Color: Amber
Odor: Characteristic
Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15.6 C): 0.86
Flash Point [Method]: >200C (392F) [ASTM D-92]
Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0
Autoignition Temperature: N/D
Boiling Point / Range: > 316C (601F)
Vapor Density (Air = 1): > 2 at 101 kPa
Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 C
Evaporation Rate (n-butyl acetate = 1): N/D
pH: N/A

Product Name: MOBIL 1 5W-30
 Revision Date: 09Jan2009
 Page 5 of 8

Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
Solubility in Water: Negligible
Viscosity: [N/D at 40 °C] | 11 cSt (11 mm²/sec) at 100C
Oxidizing Properties: See Sections 3, 15, 16.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/A
Pour Point: -36°C (-33°F)

SECTION 10	STABILITY AND REACTIVITY
-------------------	---------------------------------

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11	TOXICOLOGICAL INFORMATION
-------------------	----------------------------------

ACUTE TOXICITY

<u>Route of Exposure</u>	<u>Conclusion / Remarks</u>
Inhalation	
Toxicity (Rat): LC50 > 5000 mg/m ³	Minimally Toxic. Based on test data for structurally similar materials.
Irritation: No end point data.	Negligible hazard at ambient/normal handling temperatures. Based on assessment of the components.
Ingestion	
Toxicity (Rat): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Skin	
Toxicity (Rabbit): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Irritation (Rabbit): Data available.	Negligible irritation to skin at ambient temperatures. Based on test data for structurally similar materials.
Eye	
Irritation (Rabbit): Data available.	May cause mild, short-lasting discomfort to eyes. Based on test data for structurally similar materials.

CHRONIC/OTHER EFFECTS

For the product itself:

Diesel engine oils: Not carcinogenic in animals tests. Used and unused diesel engine oils did not produce any carcinogenic effects in chronic mouse skin painting studies.

Oils that are used in gasoline engines may become hazardous and display the following properties:

Carcinogenic in animal tests. Caused mutations in vitro. Possible allergen and photoallergen. Contains polycyclic aromatic compounds (PAC) from combustion products of gasoline and/or thermal degradation

Product Name: MOBIL 1 5W-30
Revision Date: 09Jan2009
Page 6 of 8

products.

Contains:

Synthetic base oils: Not expected to cause significant health effects under conditions of normal use, based on laboratory studies with the same or similar materials. Not mutagenic or genotoxic. Not sensitizing in test animals and humans.

Additional information is available by request.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC	3 = IARC 1	5 = IARC 2B
2 = NTP SUS	4 = IARC 2A	6 = OSHA CARC

SECTION 12	ECOLOGICAL INFORMATION
-------------------	-------------------------------

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

SECTION 13	DISPOSAL CONSIDERATIONS
-------------------	--------------------------------

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be

Product Name: MOBIL 1 5W-30

Revision Date: 09Jan2009

Page 7 of 8

completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14	TRANSPORT INFORMATION
-------------------	------------------------------

LAND (DOT) : Not Regulated for Land Transport

LAND (TDG) : Not Regulated for Land Transport

SEA (IMDG) : Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA) : Not Regulated for Air Transport

SECTION 15	REGULATORY INFORMATION
-------------------	-------------------------------

OSHA HAZARD COMMUNICATION STANDARD: When used for its intended purposes, this material is not classified as hazardous in accordance with OSHA 29 CFR 1910.1200.

NATIONAL CHEMICAL INVENTORY LISTING: AICS, IECSC, DSL, ENCS, KECI, PICCS, TSCA

Special Cases:

Inventory	Status
ELINCS	Restrictions Apply

EPCRA: This material contains no extremely hazardous substances.

SARA (311/312) REPORTABLE HAZARD CATEGORIES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The Following Ingredients are Cited on the Lists Below:

Chemical Name	CAS Number	List Citations
DIPHENYLAMINE	122-39-4	5
PHENOL, 4,4-METHYLENEBIS(2,6-BIS(1,1-DIMETHYLETHYL)-	118-82-1	5
ZINC DITHIOPHOSPHATE	68649-42-3	15

--REGULATORY LISTS SEARCHED--

Product Name: MOBIL 1 5W-30
Revision Date: 09Jan2009
Page 8 of 8

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Code key: CARC=Carcinogen; REPRO=Reproductive

SECTION 16	OTHER INFORMATION
-------------------	--------------------------

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

No revision information is available.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

DGN: 2005210XUS (1005904)

Copyright 2002 Exxon Mobil Corporation, All rights reserved



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page _____ of _____ 2

FACILITY ID#	3 0 0 3 5	BUSINESS NAME	PLATINUM CAR WASH & LUBE
--------------	-----------	---------------	--------------------------

I. FACILITY INFORMATION

CHEMICAL LOCATION	8034 GARDEN GROVE BLVD., GARDEN GROVE, CA 92844 (LUBE AREA)		
CONFIDENTIAL LOCATION EPCRA	<input type="checkbox"/> Yes <input type="checkbox"/> No	MAP #	GRID #

II. CHEMICAL INFORMATION

CHEMICAL NAME	WASTE <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	TRADE SECRET <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
COMMON NAME	* If EPCRA see Instructions	
GAS #	FIRE CODE HAZARD CLASSES (supplied by GGFD)	An EHS Chemical <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
*If EHS is "Yes", all amounts must be LBS		

TYPE (Check one item only)	<input type="checkbox"/> a. PURE <input checked="" type="checkbox"/> b. MIXTURE <input type="checkbox"/> c. WASTE	RADIOACTIVE <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	CURIES
----------------------------	---	---	--------

PHYSICAL STATE (Check one item only)	<input type="checkbox"/> a. SOLID <input checked="" type="checkbox"/> b. LIQUID <input type="checkbox"/> c. GAS	FED HAZARD CATEGORIES	<input type="checkbox"/> a. FIRE <input type="checkbox"/> b. REACTIVE <input type="checkbox"/> c. PRESSURE RELEASE <input type="checkbox"/> d. ACUTE HEALTH <input type="checkbox"/> e. CHRONIC HEALTH
--------------------------------------	---	-----------------------	--

AVERAGE DAILY AMOUNT	100 GAL	MAXIMUM DAILY AMOUNT	200 GAL	ANNUAL WASTE AMOUNT	STATE WASTE CODE
----------------------	---------	----------------------	---------	---------------------	------------------

UNITS	<input checked="" type="checkbox"/> a. GALLONS <input type="checkbox"/> b. CUBIC FEET <input type="checkbox"/> c. POUNDS <input type="checkbox"/> d. TONS	DAYS ON SITE	365	LARGEST CONTAINER	300 GAL
-------	---	--------------	-----	-------------------	---------

STORAGE CONTAINER (Check all that apply)	<input type="checkbox"/> a. ABOVEGROUND TANK <input type="checkbox"/> b. UNDERGROUND TANK <input checked="" type="checkbox"/> c. TANK INSIDE BLDG <input type="checkbox"/> d. STEEL DRUM	<input type="checkbox"/> e. PLASTIC DRUM <input type="checkbox"/> f. NONMETALLIC DRUM <input type="checkbox"/> g. METAL CONTAINER <input type="checkbox"/> h. CARBOY	<input type="checkbox"/> i. VAT <input type="checkbox"/> j. FIBER DRUM <input type="checkbox"/> k. BAG(S) <input type="checkbox"/> l. BOX(S)	<input type="checkbox"/> m. CYLINDER <input type="checkbox"/> n. GLASS CONTAINER <input type="checkbox"/> o. PLASTIC CONTAINER <input type="checkbox"/> p. IN MACH OR EQUIP	<input type="checkbox"/> q. TANK WAGON <input type="checkbox"/> r. RAIL CAR <input type="checkbox"/> s. TOTE BIN <input type="checkbox"/> t. OTHER
--	--	--	--	---	--

STORAGE PRESSURE	<input checked="" type="checkbox"/> a. AMBIENT <input type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT
------------------	--

STORAGE TEMPERATURE	<input checked="" type="checkbox"/> a. AMBIENT <input type="checkbox"/> b. ABOVE AMBIENT <input type="checkbox"/> c. BELOW AMBIENT <input type="checkbox"/> d. CRYOGENIC
---------------------	--

%WT	HAZARDOUS COMPONENT (For mixture or waste only)	EHS	CAS #
1	29	<input type="checkbox"/> Yes <input type="checkbox"/> No	32
2	29	<input type="checkbox"/> Yes <input type="checkbox"/> No	32
3	29	<input type="checkbox"/> Yes <input type="checkbox"/> No	32
4	29	<input type="checkbox"/> Yes <input type="checkbox"/> No	32
5	29	<input type="checkbox"/> Yes <input type="checkbox"/> No	32

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.


PLACARDING INFORMATION

UNDOT # _____ 33
Refer to shipping papers or MSDS

DOT HAZARD CLASS _____ 34
Refer to shipping papers or MSDS

EPCRA YES NO 35

X _____ 36
If EPCRA, Please Sign Here

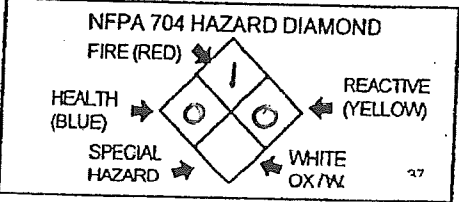

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



Super Synthetic Blend Motor Oil (All Grades)

Material Safety Data Sheet

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: Super Synthetic Blend Motor Oil (All Grades)

MSDS Code: 778615

Synonyms: 76 Super Synthetic Blend Motor Oil, SAE 5W-20
76 Super Synthetic Blend Motor Oil, SAE 5W-30
76 Super Synthetic Blend Motor Oil, SAE 10W-30

Intended Use: Automotive Engine Oil

Responsible Party: ConocoPhillips Lubricants
600 N. Dairy Ashford
Houston, Texas 77079-1175

Customer Service: 888-766-7676

Technical Information: 800-255-9556

MSDS Information: Internet: <http://w3.conocophillips.com/NetMSDS/>

Emergency Telephone Numbers: Chemtrec: 800-424-9300 (24 Hours)
California Poison Control System: 800-356-3219

2. HAZARDS IDENTIFICATION

Emergency Overview

This material is not considered hazardous according to OSHA criteria.

NEPA



Appearance: Clear Amber
Physical Form: Liquid
Odor: Petroleum

Potential Health Effects

Eye: Contact may cause mild eye irritation including stinging, watering, and redness.

Skin: Contact may cause mild skin irritation including redness and a burning sensation. Prolonged or repeated contact can defat the skin, causing drying and cracking of the skin, and possibly dermatitis (inflammation). No harmful effects from skin absorption are expected.

Inhalation (Breathing): No information available on acute toxicity.

Ingestion (Swallowing): No harmful effects expected from ingestion.

Signs and Symptoms: Effects of overexposure may include irritation of the digestive tract, nausea and diarrhea. Inhalation of oil mist or vapors at elevated temperatures may cause respiratory irritation.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include skin disorders.

See Section 11 for additional Toxicity Information.

778615 - Super Synthetic Blend Motor Oil (All Grades)
Date of Issue: 02-Jan-2008

Page 2/7
Status: Final

3. COMPOSITION / INFORMATION ON INGREDIENTS

Component	CAS	Concentration (wt. %)
Lubricant Base Oil (Petroleum)	VARIOUS	>80
Additives	PROPRIETARY	<20

4. FIRST AID MEASURES

Eye: If irritation or redness develops from exposure, flush eyes with clean water. If symptoms persist, seek medical attention.

Skin: Remove contaminated shoes and clothing and cleanse affected area(s) thoroughly by washing with mild soap and water or a waterless hand cleaner. If irritation or redness develops and persists, seek medical attention.

Inhalation (Breathing): First aid is not normally required. If breathing difficulties develop, move victim away from source of exposure and into fresh air. Seek immediate medical attention.

Ingestion (Swallowing): First aid is not normally required; however, if swallowed and symptoms develop, seek medical attention.

Notes to Physician: Acute aspirations of large amounts of oil-laden material may produce a serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

5. FIRE FIGHTING MEASURES

NFPA 704 Hazard Class

Health: 0 Flammability: 1 Instability: 0 (0-Minimal, 1-Slight, 2-Moderate, 3-Serious, 4-Severe)

Unusual Fire & Explosion Hazards: This material may burn, but will not ignite readily. If container is not properly cooled, it can rupture in the heat of a fire.

Extinguishing Media: Dry chemical, carbon dioxide, foam, or water spray is recommended. Water or foam may cause frothing of materials heated above 212°F. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, or when explicitly required by DOT, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area and keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Move undamaged containers from immediate hazard area if it can be done with minimal risk. Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done with minimal risk. Avoid spreading burning liquid with water used for cooling purposes.

See Section 9 for Flammable Properties including Flash Point and Flammable (Explosive) Limits

778615 - Super Synthetic Blend Motor Oil (All Grades)
 Date of Issue: 02-Jan-2008

Page 3/7
 Status: Final

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions: This material may burn, but will not ignite readily. Keep all sources of ignition away from spill/release. The use of explosion-proof electrical equipment is recommended. Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Wear appropriate protective equipment, including respiratory protection, as conditions warrant (see Section 8). See Sections 2 and 7 for additional information on hazards and precautionary measures.

Environmental Precautions: Stop spill/release if it can be done with minimal risk. Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Use water sparingly to minimize environmental contamination and reduce disposal requirements. Spills into or upon navigable waters, the contiguous zone, or adjoining shorelines that cause a sheen or discoloration on the surface of the water, may require notification of the National Response Center (phone number 800-424-8802).

Methods for Containment and Clean-Up: Notify fire authorities and appropriate federal, state, and local agencies. Immediate cleanup of any spill is recommended. Dike far ahead of spill for later recovery or disposal. Absorb spill with inert material such as sand or vermiculite, and place in suitable container for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling: Wash thoroughly after handling. Use good personal hygiene practices and wear appropriate personal protective equipment.

Used motor oils have been shown to cause skin cancer in mice after repeated application to the skin without washing. Brief or intermittent skin contact with used motor oil is not expected to cause harm if the oil is thoroughly removed by washing with soap and water. Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. Do not wear contaminated clothing or shoes.

"Empty" containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. "Empty" drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations. Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSI Z49.1, and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

Conditions for safe storage: Keep container(s) tightly closed. Use and store this material in cool, dry, well-ventilated areas away from heat and all sources of ignition. Store only in approved containers. Keep away from any incompatible material (see Section 10). Protect container(s) against physical damage.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Component	ACGIH	OSHA	Other:
Lubricant Base Oil (Petroleum)	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if generated	TWA: 5 mg/m ³ as Oil Mist, if generated	—

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an Industrial hygienist or similar professional, or your local agencies, for further information.

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits, additional engineering controls may be required.

Personal Protective Equipment (PPE):

Eye/Face: The use of eye protection that meets or exceeds ANSI Z.87.1 is recommended to protect against potential eye contact, irritation, or injury. Depending on conditions of use, a face shield may be necessary.

Skin: The use of gloves impervious to the specific material handled is advised to prevent skin contact. Users should check with manufacturers to confirm the performance of their products. Suggested protective materials: Nitrile.

778615 - Super Synthetic Blend Motor Oil (All Grades)
Date of Issue: 02-Jan-2008

Page 4/7
Status: Final

Respiratory: Where there is potential for airborne exposure above the exposure limit a NIOSH certified air purifying respirator equipped with R or P95 filters may be used.

A respiratory protection program that meets or is equivalent to OSHA 29 CFR 1910.134 and ANSI Z88.2 should be followed whenever workplace conditions warrant a respirator's use. Air purifying respirators provide limited protection and cannot be used in atmospheres that exceed the maximum use concentration (MUC) as directed by regulation or the manufacturer's instructions, in oxygen deficient (less than 19.5 percent oxygen) situations, or other conditions that are immediately dangerous to life and health (IDLH).

Suggestions provided in this section for exposure control and specific types of protective equipment are based on readily available information. Users should consult with the specific manufacturer to confirm the performance of their protective equipment. Specific situations may require consultation with industrial hygiene, safety, or engineering professionals.

9. PHYSICAL AND CHEMICAL PROPERTIES

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1 atm). Data represent typical values and are not intended to be specifications.

Appearance:	Clear Amber
Physical Form:	Liquid
Odor:	Petroleum
Odor Threshold:	No data
pH:	Not applicable
Vapor Pressure:	<1
Vapor Density (air=1):	>1
Boiling Point/Range:	No data
Melting/Freezing Point:	No data
Solubility in Water:	Negligible
Partition Coefficient (n-octanol/water) (Kow):	No data
Specific Gravity:	0.85 - 0.87 @ 60°F (15.6°C)
Bulk Density:	7.08 - 7.24 lbs/gal
Viscosity:	7.9 - 11.4 cSt @ 100°C; 43.0 - 74.0 cSt @ 40°C
Percent Volatile:	Negligible
Evaporation Rate (nBuAc=1):	<1
Flash Point:	Minimum 365°F / 185°C
Test Method:	Pensky-Martens Closed Cup (PMCC), ASTM D93, EPA 1010
LEL (vol % in air):	No data
UEL (vol % in air):	No data
Autoignition Temperature:	No data

10. STABILITY AND REACTIVITY

Stability: Stable under normal ambient and anticipated conditions of storage and handling.

Conditions to Avoid: Extended exposure to high temperatures can cause decomposition.

Materials to Avoid (Incompatible Materials): Avoid contact with strong oxidizing agents and strong reducing agents.

Hazardous Decomposition Products: Combustion can yield oxides of carbon, nitrogen, sulfur, phosphorus and zinc. During use in engines, contamination of oil with low levels of hazardous combustion by-products (e.g. polycyclic aromatic hydrocarbons) may occur.

Hazardous Polymerization: Not known to occur.

778615 - Super Synthetic Blend Motor Oil (All Grades)
Date of Issue: 02-Jan-2008

Page 5/7
Status: Final

11. TOXICOLOGICAL INFORMATION

Chronic Data:

Lubricant Base Oil (Petroleum)

Carcinogenicity: The petroleum base oils contained in this product have been highly refined by a variety of processes including severe hydrocracking/hydroprocessing to reduce aromatics and improve performance characteristics. All of the oils meet the IP-346 criteria of less than 3 percent PAH's and are not considered carcinogens by NTP, IARC, or OSHA.

Acute Data:

Component	Oral LD50	Dermal LD50	Inhalation LC50
Lubricant Base Oil (Petroleum)	>5 g/kg	>2 g/kg	No data

12. ECOLOGICAL INFORMATION

Lubricant oil basestocks are complex mixtures of hydrocarbons (primarily branched chain alkanes and cycloalkanes) ranging in carbon number from C15 to C50. The aromatic hydrocarbon content of these mixtures varies with the severity of the refining process. White oils have negligible levels of aromatic hydrocarbons, whereas significant proportions are found in unrefined basestocks. Olefins are found only at very low concentrations. Volatilization is not significant after release of lubricating oil basestocks to the environment due to the very low vapor pressure of the hydrocarbon constituents. In water, lubricating oil basestocks will float and will spread at a rate that is viscosity dependent. Water solubilities are very low and dispersion occurs mainly from water movement with adsorption by sediment being the major fate process. In soil, lubricating oil basestocks show little mobility and adsorption is the predominant physical process.

Both acute and chronic ecotoxicity studies have been conducted on lubricant base oils. Results indicate that the acute aquatic toxicities to fish, Daphnia, Ceriodaphnia and algal species are above 1000 mg/l using either water accommodated fractions or oil in water dispersions. Since lubricant base oils mainly contain hydrocarbons having carbon numbers in the range C15 to C50, it is predicted that acute toxicity would not be observed with these substances due to low water solubility. Results from chronic toxicity tests show that the no observed effect level (NOEL) usually exceeds 1000 mg/l for lubricant base oils with the overall weight of experimental evidence leading to the conclusion that lubricant base oils do not cause chronic toxicity to fish and invertebrates.

Large volumes spills of lubricant base oils into water will produce a layer of undissolved oil on the water surface that will cause direct physical fouling of organisms and may interfere with surface air exchange resulting in lower levels of dissolved oxygen. Petroleum products have also been associated with causing taint in fish even when the latter are caught in lightly contaminated environments. Highly refined base oils sprayed onto the surface of eggs will result in a failure to hatch.

Extensive experience from laboratory and field trials in a wide range of crops has confirmed that little or no damage is produced as a result of either aerosol exposure or direct application of oil emulsion to the leaves of crop plants. Base oils incorporated into soil have resulted in little or no adverse effects on seed germination and plant growth at contamination rates up to 4%.

13. DISPOSAL CONSIDERATIONS

The generator of a waste is always responsible for making proper hazardous waste determinations and needs to consider state and local requirements in addition to federal regulations.

This material, if discarded as produced, would not be a federally regulated RCRA "listed" hazardous waste and is not believed to exhibit characteristics of hazardous waste. See Sections 7 and 8 for information on handling, storage and personal protection and Section 9 for physical/chemical properties. It is possible that the material as produced contains constituents which are not required to be listed in the MSDS but could affect the hazardous waste determination. Additionally, use which results in chemical or physical change of this material could subject it to regulation as a hazardous waste.

This material under most intended uses would become "Used Oil" due to contamination by physical or chemical impurities. Whenever possible, Recycle Used Oil in accordance with applicable federal and state or local regulations. Container contents should be completely used and containers should be emptied prior to discard.

14. TRANSPORTATION INFORMATION

U.S. Department of Transportation (DOT)

Shipping Description:

Note:

Not regulated

If shipped by land in a packaging having a capacity of 3,500 gallons or more, the provisions of 49 CFR, Part 130 apply. (Contains oil)

778615 - Super Synthetic Blend Motor Oil (All Grades)
 Date of Issue: 02-Jan-2008

Page 6/7
 Status: Final

14. TRANSPORTATION INFORMATION

International Maritime Dangerous Goods (IMDG)

Shipping Description: Not regulated
 Note: Federal compliance requirements may apply. See 49 CFR 171.12.

International Civil Aviation Org. / International Air Transport Assoc. (ICAO/IATA)

UN/ID #: Not regulated

	LTD. QTY	Passenger Aircraft	Cargo Aircraft Only
Packaging Instruction #:			
Max. Net Qty. Per Package:			

15. REGULATORY INFORMATION

CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs (in pounds):

This material does not contain any chemicals subject to the reporting requirements of SARA 302 and 40 CFR 372.

CERCLA/SARA - Section 311/312 (Title III Hazard Categories):

Acute Health: No
 Chronic Health: No
 Fire Hazard: No
 Pressure Hazard: No
 Reactive Hazard: No

CERCLA/SARA - Section 313 and 40 CFR 372:

This material does not contain any chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372.

EPA (CERCLA) Reportable Quantity (in pounds):

This material does not contain any chemicals with CERCLA Reportable Quantities.

California Proposition 65:

This material does not contain any chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm at concentrations that trigger the warning requirements of California Proposition 65.

Canadian Regulations:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the Regulations.

WHMIS Hazard Class

None

National Chemical Inventories:

All components are either listed on the US TSCA Inventory, or are not regulated under TSCA.
 All components are either on the DSL, or are exempt from DSL listing requirements.

U.S. Export Control Classification Number: EAR99

16. OTHER INFORMATION

Issue Date: 02-Jan-2008
 Status: Final
 Previous Issue Date: 22-Feb-2005
 Revised Sections or Basis for Revision: NFPA ratings (Section 2)
 Composition (Section 3)
 Physical Properties (Section 9)
 Stability and Reactivity (Section 10)
 Regulatory information (Section 15)

778615 - Super Synthetic Blend Motor Oil (All Grades)
Date of Issue: 02-Jan-2008

Page 717
Status: Final

16 OTHER INFORMATION

MSDS Code:

778615

MSDS Legend:

ACGIH = American Conference of Governmental Industrial Hygienists; CAS = Chemical Abstracts Service Registry; CEILING = Ceiling Limit (15 minutes); CERCLA = The Comprehensive Environmental Response, Compensation, and Liability Act; EPA = Environmental Protection Agency; IARC = International Agency for Research on Cancer; LEL = Lower Explosive Limit; NE = Not Established; NFPA = National Fire Protection Association; NTP = National Toxicology Program; OSHA = Occupational Safety and Health Administration; PEL = Permissible Exposure Limit (OSHA); SARA = Superfund Amendments and Reauthorization Act; STEL = Short Term Exposure Limit (15 minutes); TLV = Threshold Limit Value (ACGIH); TWA = Time Weighted Average (8 hours); UEL = Upper Explosive Limit; WHMIS = Worker Hazardous Materials Information System (Canada)

Disclaimer of Expressed and Implied Warranties:

The information presented in this Material Safety Data Sheet is based on data believed to be accurate as of the date this Material Safety Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THIS PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.



HAZARDOUS MATERIALS INVENTORY FORM

FORM 3

ADD DELETE REVISED 1

Page _____ of _____ 2

FACILITY ID#	30035	BUSINESS NAME	PLATINUM CAR WASH & LUBE
--------------	-------	---------------	--------------------------

I. FACILITY INFORMATION

CHEMICAL LOCATION
8034 GARDEN GROVE BLVD., GARDEN GROVE, CA 92844 (LUBE AREA)

CONFIDENTIAL LOCATION EPCRA Yes No 5 MAP # 6 GRID # 7

II. CHEMICAL INFORMATION

CHEMICAL NAME
HIGH PERFORMANCE GEAR OIL

COMMON NAME
AUTOMOTIVE GEAR OIL

WASTE Yes 8 TRADE SECRET Yes No 11

GAS # 10 FIRE CODE HAZARD CLASSES (supplied by GGFD) 13

* If EPCRA see instructions
An EHS Chemical Yes No 12
*If EHS is "Yes", all amounts must be LBS

TYPE (Check one item only)

a. PURE b. MIXTURE c. WASTE 14

RADIOACTIVE Yes No 15

PHYSICAL STATE (Check one item only)

a. SOLID b. LIQUID c. GAS 17

FED HAZARD CATEGORIES

a. FIRE b. REACTIVE c. PRESSURE RELEASE 18

d. ACUTE HEALTH e. CHRONIC HEALTH

AVERAGE DAILY AMOUNT 19 10 GAL

MAXIMUM DAILY AMOUNT 20 40 GAL

UNITS a. GALLONS b. CUBIC FEET c. POUNDS d. TONS

DAYS ON SITE 24 365

ANNUAL WASTE AMOUNT 21

STATE WASTE CODE 22

LARGEST CONTAINER 25 5 GAL

STORAGE CONTAINER (Check all that apply)

a. ABOVEGROUND TANK e. PLASTIC DRUM i. VAT

b. UNDERGROUND TANK f. NONMETALLIC DRUM j. FIBER DRUM

c. TANK INSIDE BLDG g. METAL CONTAINER k. BAG(S)

d. STEEL DRUM h. CARBOY l. BOX(S)

m. CYLINDER n. GLASS CONTAINER o. TANK WAGON

p. IN MACH OR EQUIP q. PLASTIC CONTAINER r. RAIL CAR

s. TOTE BIN t. OTHER

STORAGE PRESSURE a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT 27

STORAGE TEMPERATURE a. AMBIENT b. ABOVE AMBIENT c. BELOW AMBIENT 28

1	29	HAZARDOUS COMPONENT (For mixture or waste only)	EHS		CAS #
			30	31	
2	29		<input type="checkbox"/> Yes <input type="checkbox"/> No	31	32
3	29		<input type="checkbox"/> Yes <input type="checkbox"/> No	31	32
4	29		<input type="checkbox"/> Yes <input type="checkbox"/> No	31	32
5	29		<input type="checkbox"/> Yes <input type="checkbox"/> No	31	32
			<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	31	32

If more hazardous components are present at greater than 1% by weight if non-carcinogenic, or 0.1% by weight if carcinogenic, attach additional sheets of paper capturing the required information.


PLACARDING INFORMATION

UNDOT # _____ 33
Refer to shipping papers or MSDS

DOT HAZARD CLASS _____ 34
Refer to shipping papers or MSDS

EPCRA YES NO 35

X _____ 36
If EPCRA, Please Sign Here

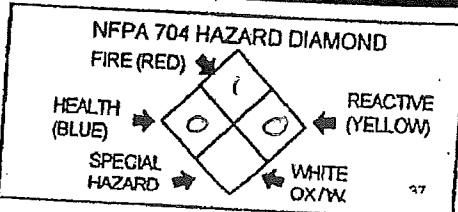

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



High Performance Gear Oil,
SAE 80W-90 - 85W/140
Material Safety Data Sheet

1. PRODUCT AND COMPANY IDENTIFICATION


Product Name: High Performance Gear Oil, SAE 80W-90
MSDS Code: 778598
Synonyms: 76 High Performance Gear Oil, SAE 80W-90
Intended Use: Automotive Gear Oil
Responsible Party: ConocoPhillips Lubricants
600 N. Dairy Ashford
Houston, Texas 77079-1175
Customer Service: 888-766-7676
Technical Information: 800-255-9556
MSDS Information: Internet: <http://w3.conocophillips.com/NetMSDS/>
Emergency Telephone Numbers: Chemtrec: 800-424-9300 (24 Hours)
California Poison Control System: 800-356-3219

2. HAZARDS IDENTIFICATION

Emergency Overview

This material is not considered hazardous according to OSHA criteria.

NFPA



Appearance: Amber
Physical Form: Liquid
Odor: Characteristic petroleum

Potential Health Effects

Eye: Contact may cause mild eye irritation including stinging, watering, and redness.

Skin: Contact may cause mild skin irritation including redness and a burning sensation. Prolonged or repeated contact can defat the skin, causing drying and cracking of the skin, and possibly dermatitis (inflammation). A component of this material may cause an allergic skin reaction. No harmful effects from skin absorption are expected.

Inhalation (Breathing): No information available on acute toxicity.

Ingestion (Swallowing): No harmful effects expected from ingestion.

Signs and Symptoms: Effects of overexposure may include irritation of the digestive tract, nausea and diarrhea. Inhalation of oil mist or vapors at elevated temperatures may cause respiratory irritation.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include skin disorders.

See Section 11 for additional Toxicity Information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

3. COMPOSITION / INFORMATION ON INGREDIENTS

Component	CAS	Concentration (wt %)
Lubricant Base Oil (Petroleum)	VARIOUS	>90
Additives	PROPRIETARY	<10

4. FIRST AID MEASURES

Eye: If irritation or redness develops from exposure, flush eyes with clean water. If symptoms persist, seek medical attention.

Skin: Remove contaminated shoes and clothing and cleanse affected area(s) thoroughly by washing with mild soap and water or a waterless hand cleaner. If irritation or redness develops and persists, seek medical attention.

Inhalation (Breathing): If respiratory symptoms develop, move victim away from source of exposure and into fresh air. If symptoms persist, seek medical attention.

Ingestion (Swallowing): First aid is not normally required; however, if swallowed and symptoms develop, seek medical attention.

Notes to Physician: Acute aspirations of large amounts of oil-laden material may produce a serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

5. FIRE-FIGHTING MEASURES

NFPA 704 Hazard Class

Health: 0 **Flammability:** 1 **Instability:** 0 (0-Minimal, 1-Slight, 2-Moderate, 3-Serious, 4-Severe)

Unusual Fire & Explosion Hazards: This material may burn, but will not ignite readily. If container is not properly cooled, it can rupture in the heat of a fire.

Extinguishing Media: Dry chemical, carbon dioxide, foam, or water spray is recommended. Water or foam may cause frothing of materials heated above 212°F. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, or when explicitly required by DOT, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area and keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Move undamaged containers from immediate hazard area if it can be done with minimal risk. Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done with minimal risk. Avoid spreading burning liquid with water used for cooling purposes.

See Section 9 for Flammable Properties including Flash Point and Flammable (Explosive) Limits

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions: This material may burn, but will not ignite readily. Keep all sources of ignition away from spill/release. The use of explosion-proof electrical equipment is recommended. Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Wear appropriate protective equipment, including respiratory protection, as conditions warrant (see Section 8).

Environmental Precautions: Stop spill/release if it can be done with minimal risk. Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Spills into or upon navigable waters, the contiguous zone, or adjoining shorelines that cause a sheen or discoloration on the surface of the water, may require notification of the National Response Center (phone number 800-424-8802).

Methods for Containment and Clean-Up: Notify fire authorities and appropriate federal, state, and local agencies. Immediate cleanup of any spill is recommended. Dike far ahead of spill for later recovery or disposal. Spilled material may be absorbed into an appropriate absorbent material.

7. HANDLING AND STORAGE

Precautions for safe handling: Wear protective gloves. Avoid breathing vapors or mists. Contaminated work clothing should not be allowed out of the workplace. Wash thoroughly after handling. Use good personal hygiene practices.

Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. Do not wear contaminated clothing or shoes.

"Empty" containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. "Empty" drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations. Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSI Z49.1, and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

Conditions for safe storage: Keep container(s) tightly closed. Use and store this material in cool, dry, well-ventilated areas away from heat and all sources of ignition. Store only in approved containers. Keep away from any incompatible material (see Section 10). Protect container(s) against physical damage.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Component	ACGIH	OSHA	Other:
Lubricant Base Oil (Petroleum)	TWA: 5mg/m ³ STEL: 10 mg/m ³ as Oil Mist, if Generated	TWA: 5 mg/m ³ as Oil Mist, if Generated	---

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

Suggestions provided in this section for exposure control and specific types of protective equipment are based on readily available information. Users should consult with the specific manufacturer to confirm the performance of their protective equipment. Specific situations may require consultation with industrial hygiene, safety, or engineering professionals.

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits, additional engineering controls may be required.

Personal Protective Equipment (PPE):

Eye/Face: The use of eye protection that meets or exceeds ANSI Z.87.1 is recommended to protect against potential eye contact, irritation, or injury. Depending on conditions of use, a face shield may be necessary.

Skin: The use of gloves impervious to the specific material handled is advised to prevent skin contact. Users should check with manufacturers to confirm the performance of their products. Suggested protective materials: Nitrile

Respiratory: A respiratory protection program that meets or is equivalent to OSHA 29 CFR 1910.134 and ANSI Z88.2 should be followed whenever workplace conditions warrant a respirator's use. Where there is potential for airborne exposure above the exposure limit a NIOSH certified air purifying respirator equipped with R or P95 filters may be used. Air purifying respirators provide limited protection and cannot be used in atmospheres that exceed the maximum use concentration (MUC) as directed by regulation or the manufacturer's instructions, in oxygen deficient (less than 19.5 percent oxygen) situations, or other conditions that are immediately dangerous to life and health (IDLH).

9. PHYSICAL AND CHEMICAL PROPERTIES

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1 atm). Data represent typical values and are not intended to be specifications.

Appearance:	Amber
Physical Form:	Liquid
Odor:	Characteristic petroleum
Odor Threshold:	No data
pH:	Not applicable
Vapor Pressure:	<1
Vapor Density (air=1):	>1

Boiling Point/Range:	No data
Melting/Freezing Point:	No data
Solubility in Water:	Negligible
Partition Coefficient (n-octanol/water) (Kow):	No data
Specific Gravity:	0.88 - 0.89 @ 60°F (15.6°C)
Bulk Density:	7.33 - 7.41 lbs/gal
Viscosity:	13.5 - 16.9 cSt @ 100°C; 130 - 170 cSt @ 40°C
Percent Volatile:	Negligible
Evaporation Rate (nBuAc=1):	<1
Flash Point:	Minimum 271°F / 133°C
Test Method:	Pensky-Martens Closed Cup (PMCC), ASTM D93, EPA 1010
LEL (vol % in air):	No data
UEL (vol % in air):	No data
Autoignition Temperature:	No data

10. STABILITY AND REACTIVITY

Stability: Stable under normal ambient and anticipated conditions of storage and handling.

Conditions to Avoid: Extended exposure to high temperatures can cause decomposition.

Materials to Avoid (Incompatible Materials): Avoid contact with strong oxidizing agents and strong reducing agents.

Hazardous Decomposition Products: Combustion can yield oxides of carbon, nitrogen, sulfur and phosphorus. Hydrogen sulfide may also be released.

Hazardous Polymerization: Will not occur.

11. TOXICOLOGICAL INFORMATION

Chronic Data:

Lubricant Base Oil (Petroleum)

Carcinogenicity: The petroleum base oils contained in this product have been highly refined by a variety of processes including solvent extraction, hydrotreating, and/or dewaxing to remove aromatics and improve performance characteristics. They contain low concentrations of PAH's and none have been identified as a carcinogen by NTP, IARC or OSHA.

Acute Data:

Component	Oral LD50	Dermal LD50	Inhalation LC50
Lubricant Base Oil (Petroleum)	>5 g/kg	>2 g/kg	No data

12. ECOLOGICAL INFORMATION

12. ECOLOGICAL INFORMATION

Lubricant oil basestocks are complex mixtures of hydrocarbons (primarily branched chain alkanes and cycloalkanes) ranging in carbon number from C15 to C50. The aromatic hydrocarbon content of these mixtures varies with the severity of the refining process. White oils have negligible levels of aromatic hydrocarbons, whereas significant proportions are found in unrefined basestocks. Olefins are found only at very low concentrations. Volatilization is not significant after release of lubricating oil basestocks to the environment due to the very low vapor pressure of the hydrocarbon constituents. In water, lubricating oil basestocks will float and will spread at a rate that is viscosity dependent. Water solubilities are very low and dispersion occurs mainly from water movement with adsorption by sediment being the major fate process. In soil, lubricating oil basestocks show little mobility and adsorption is the predominant physical process.

Both acute and chronic ecotoxicity studies have been conducted on lubricant base oils. Results indicate that the acute aquatic toxicities to fish, Daphnia, Ceriodaphnia and algal species are above 1000 mg/l using either water accommodated fractions or oil in water dispersions. Since lubricant base oils mainly contain hydrocarbons having carbon numbers in the range C15 to C50, it is predicted that acute toxicity would not be observed with these substances due to low water solubility. Results from chronic toxicity tests show that the no observed effect level (NOEL) usually exceeds 1000 mg/l for lubricant base oils with the overall weight of experimental evidence leading to the conclusion that lubricant base oils do not cause chronic toxicity to fish and invertebrates.

Large volumes spills of lubricant base oils into water will produce a layer of undissolved oil on the water surface that will cause direct physical fouling of organisms and may interfere with surface air exchange resulting in lower levels of dissolved oxygen. Petroleum products have also been associated with causing taint in fish even when the latter are caught in lightly contaminated environments. Highly refined base oils sprayed onto the surface of eggs will result in a failure to hatch.

Extensive experience from laboratory and field trials in a wide range of crops has confirmed that little or no damage is produced as a result of either aerosol exposure or direct application of oil emulsion to the leaves of crop plants. Base oils incorporated into soil have resulted in little or no adverse effects on seed germination and plant growth at contamination rates up to 4%.

13. DISPOSAL CONSIDERATIONS

The generator of a waste is always responsible for making proper hazardous waste determinations and needs to consider state and local requirements in addition to federal regulations.

This material, if discarded as produced, would not be a federally regulated RCRA "listed" hazardous waste and is not believed to exhibit characteristics of hazardous waste. See Sections 7 and 8 for information on handling, storage and personal protection and Section 9 for physical/chemical properties. It is possible that the material as produced contains constituents which are not required to be listed in the MSDS but could affect the hazardous waste determination. Additionally, use which results in chemical or physical change of this material could subject it to regulation as a hazardous waste.

This material under most intended uses would become "Used Oil" due to contamination by physical or chemical impurities. Whenever possible, Recycle Used Oil in accordance with applicable federal and state or local regulations. Container contents should be completely used and containers should be emptied prior to discard.

14. TRANSPORTATION INFORMATION

U.S. Department of Transportation (DOT)

Shipping Description:

Not regulated

Note:

If shipped by land in a packaging having a capacity of 3,500 gallons or more, the provisions of 49 CFR, Part 130 apply. (Contains oil)

International Maritime Dangerous Goods (IMDG)

Shipping Description:

Not regulated

Note:

Federal compliance requirements may apply. See 49 CFR 171.12.

International Civil Aviation Org. / International Air Transport Assoc. (ICAO/IATA)

UN/ID #:

Not regulated

Note:

Federal compliance requirements may apply. See 49 CFR 171.11.

	LTD. QTY	Passenger Aircraft	Cargo Aircraft Only
Packaging Instruction #:	---	---	---
Max. Net Qty. Per Package:	---	---	---

15. REGULATORY INFORMATION

CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs (in pounds):

This material does not contain any chemicals subject to the reporting requirements of SARA 302 and 40 CFR 372.

CERCLA/SARA - Section 311/312 (Title III Hazard Categories)

Acute Health:	No
Chronic Health:	No
Fire Hazard:	No
Pressure Hazard:	No
Reactive Hazard:	No

CERCLA/SARA - Section 313 and 40 CFR 372:

This material contains the following chemicals subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR 372:
This material does not contain any chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372.

EPA (CERCLA) Reportable Quantity (in pounds):

This material contains the following chemicals subject to the reporting requirements of 40 CFR 302.4:

California Proposition 65:

Warning: This material may contain detectable quantities of the following chemicals, known to the State of California to cause cancer, birth defects or other reproductive harm, and which may be subject to the requirements of California Proposition 65 (CA Health & Safety Code Section 25249.5):

Component	Type of Toxicity
Ethyl Acrylate	Cancer

Canadian Regulations:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

WHMIS Hazard Class

None

National Chemical Inventories:

All components are either listed on the US TSCA Inventory, or are not regulated under TSCA.
All components are listed on the Canadian DSL.

U.S. Export Control Classification Number: EAR99

16. OTHER INFORMATION

Issue Date:	13-Aug-2007
Status:	Final
Revised Sections or Basis for Revision:	Periodic review and update
MSDS Code:	778598

MSDS Legend:

ACGIH = American Conference of Governmental Industrial Hygienists; CAS = Chemical Abstracts Service Registry; CEILING = Ceiling Limit (15 minutes); CERCLA = The Comprehensive Environmental Response, Compensation, and Liability Act; EPA = Environmental Protection Agency; IARC = International Agency for Research on Cancer; LEL = Lower Explosive Limit; NE = Not Established; NFPA = National Fire Protection Association; NTP = National Toxicology Program; OSHA = Occupational Safety and Health Administration; PEL = Permissible Exposure Limit (OSHA); SARA = Superfund Amendments and Reauthorization Act; STEL = Short Term Exposure Limit (15 minutes); TLV = Threshold Limit Value (ACGIH); TWA = Time Weighted Average (8 hours); UEL = Upper Explosive Limit; WHMIS = Worker Hazardous Materials Information System (Canada)

Disclaimer of Expressed and implied Warranties:

The information presented in this Material Safety Data Sheet is based on data believed to be accurate as of the date this Material Safety Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THIS PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.



CITY OF GARDEN GROVE
11301 ACACIA PARKWAY
GARDEN GROVE, CALIFORNIA 92842
(714) 741-5636

CUPA

FACILITY INFORMATION

BUSINESS ACTIVITIES

Page J of ___

I. FACILITY IDENTIFICATION

FACILITY ID# 3 0 0 3 5 1. EPA ID# (Hazardous Waste Only) CAL 000346539

BUSINESS NAME (Same as FACILITY NAME or DBA-Doing Business As) PLATINUM CAR WASH & LUBE

II. ACTIVITIES DECLARATION

NOTE: If you check YES to any part of this list please submit the Business Owner/Operator Identification page.

Does your facility...

If Yes, please complete these pages of the UPCF...

A. HAZARDOUS MATERIALS

Have on site (for any purpose) hazardous materials at or above 55 gallons for liquids, 500 pounds for solids, or 200 cubic feet for compressed gases (include liquids in ASTs and USTs); or the applicable Federal threshold quantity for an extremely hazardous substance specified in 40 CFR Part 355, Appendix A or B; or handle radiological materials in quantities for which an emergency plan is required pursuant to 10 CFR Parts 30, 40 or 70?

YES NO 4. HAZARDOUS MATERIALS INVENTORY - CHEMICAL DESCRIPTION (Form 3)

B. UNDERGROUND STORAGE TANKS (USTs)

- Own or operate underground storage tanks?
- Intent to upgrade existing or install new USTs?
- Need to report closing a UST?

YES NO 5. UST FACILITY (Formerly SWRCB Form A)
 UST TANK (one page per tank) (Formerly Form B)
 YES NO 6. UST FACILITY
 UST TANK (one per tank)
 UST INSTALLATION - CERTIFICATE OF COMPLIANCE (one page per tank) (Formerly Form C)
 YES NO 7. UST TANK (closure portion-one page per tank)

C. ABOVE GROUND PETROLEUM STORAGE TANKS (ASTs)

Own or operate ASTs above these thresholds:
- any tank capacity is greater than 660 gallons, or
- the total aggregate capacity for the entire facility (ASTs, drums and portable containers) greater than 1,320 gallons?

YES NO 8. NO FORM REQUIRED TO CUPAS

D. HAZARDOUS WASTE

- Generate hazardous waste?
- Recycle more than 100 kg/month of excluded or exempted recyclable materials (per HSC §25143.2)?
- Treat hazardous waste on site?
- Treatment subject to financial assurance requirements (for Permit by Rule and Condition Authorization)?
- Consolidate hazardous waste generated at a remove site?
- Need to report the closure/removal of a tank that was classified waste and cleaned onsite?

YES NO 9. EPA ID NUMBER - provide at the top of this page
 YES NO 10. RECYCLABLE MATERIALS REPORT (one per recycler)
 YES NO 11. ONSITE HAZARDOUS WASTE TREATMENT - FACILITY (Formerly DTSC Forms 1772)
 ONSITE HAZARDOUS WASTE TREATMENT - UNIT (one page per unit) (Formerly DTSC Forms 1772A,B,C,D and L)
 YES NO 12. CERTIFICATION OF FINANCIAL ASSURANCE (Formerly DTSC Form 1232)
 YES NO 13. REMOTE WASTE/CONSOLIDATION SITE ANNUAL NOTIFICATION (Formerly DTSC Form 1196)
 YES NO 14. HAZARDOUS WASTE TANK CLOSURE CERTIFICATION (Formerly DTSC Form 1249)

E. LOCAL REQUIREMENTS

Cal-ARP: California Accidental Release Prevention Program
H&SC Chapter 6.95, Article 2, §25531 et seq
Stationary Source with more than a Threshold Quantity of a Regulated Substance in a Process

YES NO 15. REGULATED SUBSTANCE REPORTING FORM (Orange County CUPA)

GARDEN GROVE FIRE DEPARTMENT

BUSINESS EMERGENCY PLAN

A BUSINESS IS REQUIRED BY LAW TO NOTIFY THE GARDEN GROVE FIRE DEPARTMENT WITHIN 30 DAYS OF ANY OF THE FOLLOWING EVENTS.


- 1. Change of business address.
- 2. Change of business ownership.
- 3. Change of business name.
- 4. Cessation of business operation (quitting business).
- 5. Use or handling of a previously undisclosed hazardous material.
- 6. A 100% increase in the quantity of a previously disclosed hazardous material.

Your business is required by State law (CFC 8001.3.2) to retain a copy of this entire Hazardous Materials Disclosure information, including the Business Plan, chemical inventory, material safety data sheets and site maps, for review by Fire Department personnel. State where your disclosure and Emergency Business Plan will be kept.

Show location on site map also using symbol in the legend.

Note: A fee is charged for a replacement copy from the Garden Grove Fire Department.

I certify, under penalty of perjury, that the enclosed information is true and correct to the best of my knowledge.

Signature: 
Name: C. J. Duan
Title: OFFICER
Date: 11/01/09

**GARDEN GROVE FIRE DEPARTMENT
HAZARDOUS MATERIALS DISCLOSURE PROGRAM**

**THE FOLLOWING FORMS ARE FOR USE IN THE EVENT OF
AN ACTUAL OR THREATENING HAZARDOUS MATERIALS EMERGENCY.**

BUSINESS EMERGENCY PLAN

All businesses using, handling or storing hazardous materials that are required to disclose must complete a Business Emergency Plan. The occupancy groups listed below will be permitted to complete a short version of the business plan. The completion of the short form shall be considered the application required in the Health and Safety Code, Title 20, Chapter 6.95, Section 25503.5.

The Chief of the Garden Grove Fire Department in the role of the Administering Agency, allows the following types of businesses to file the short version of the Business Emergency Plan.

1. Gasoline/Diesel service stations. S-3 occupancies
2. Repair Garages. H-4 occupancies
3. Dry Cleaners
4. Businesses, at the Fire Chief's discretion, with less than 10 employees and using materials that are not considered highly or acutely toxic.

The Fire Chief exempts the following portions from the business plan. These exemptions have been established because the materials used in the above-mentioned occupancies are common knowledge to first responding units. The materials pose no significant, unexpected hazard nor do they affect the ability of the administering agency to effectively respond to their release of a hazardous material and that there are unusual circumstances justifying this exemption.

Exemptions

1. Detailed evacuation plans.
2. Detailed key employee responsibilities.
3. Training outline.
4. Detailed prevention outline.

The following Short Business Emergency Plan must be completed in order for the exemption to be granted.