


# City of Garden Grove

## Historic Main Street Connectivity and Mobility


### Exhibits




**Project Area—Aerial**

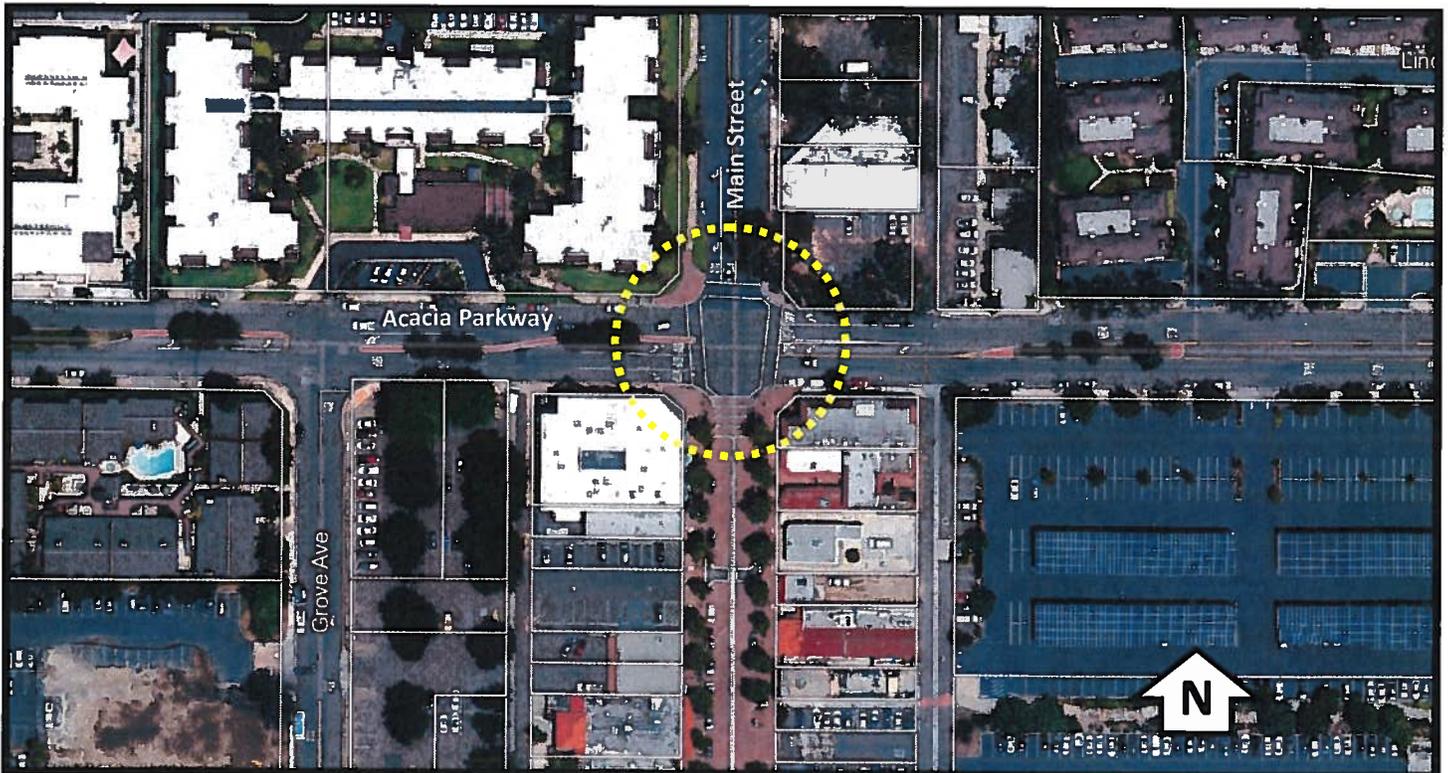

**Project Area—Aerial Close-Up**

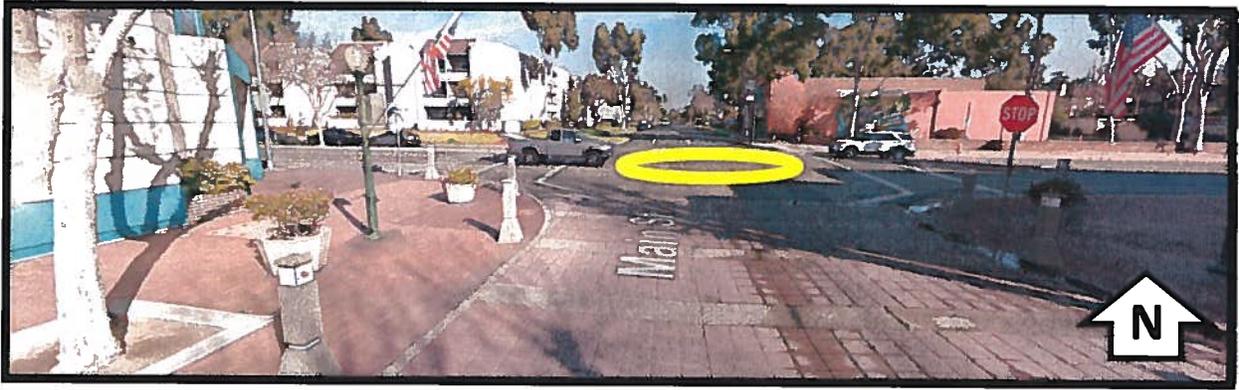


**Main Street & Acacia Parkway — North View**

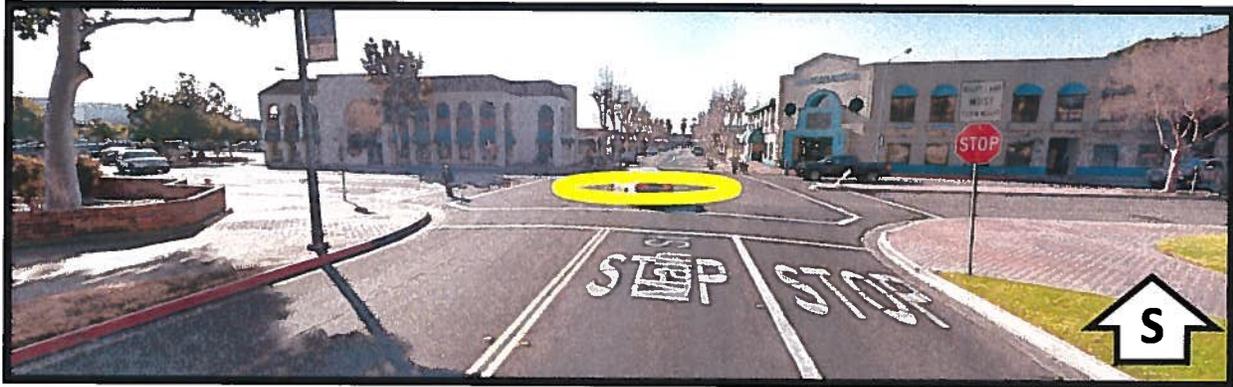


**Main Street & Acacia Parkway — South View**




**Main Street & Acacia Parkway — East View**

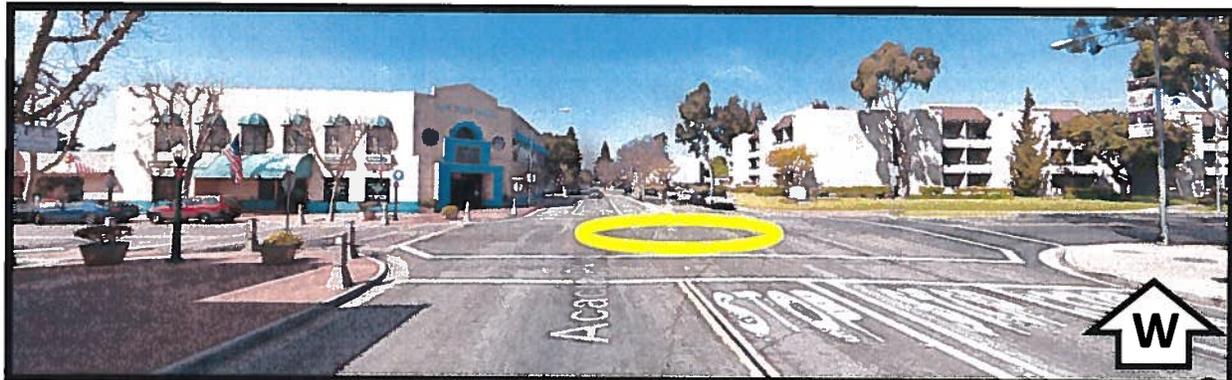

**Main Street & Acacia Parkway — West View**

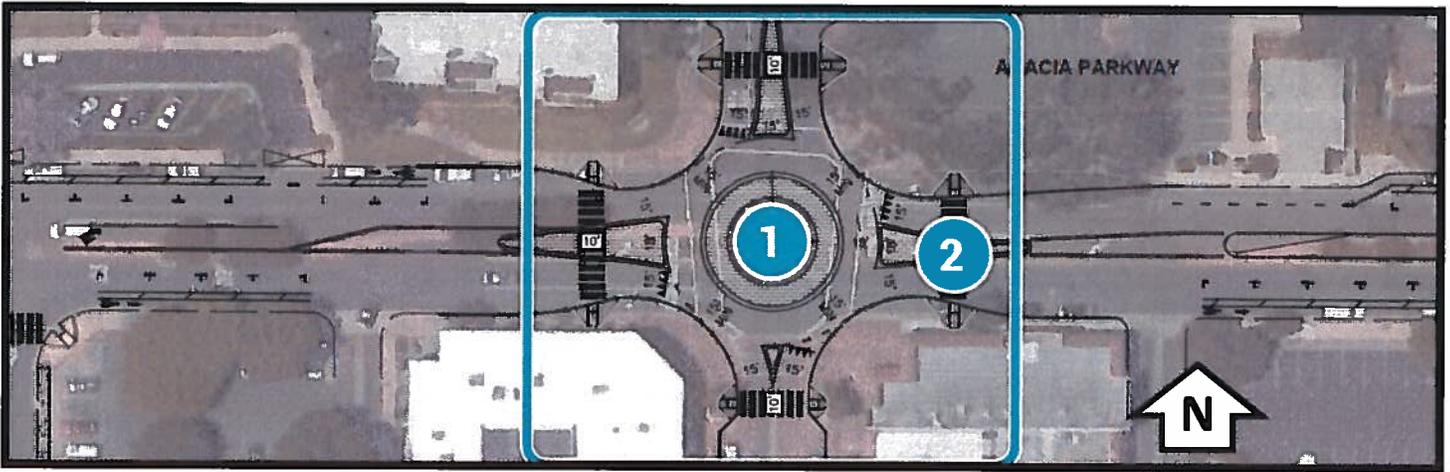

**Turning Circle—Main Street & Acacia Parkway — Concept**

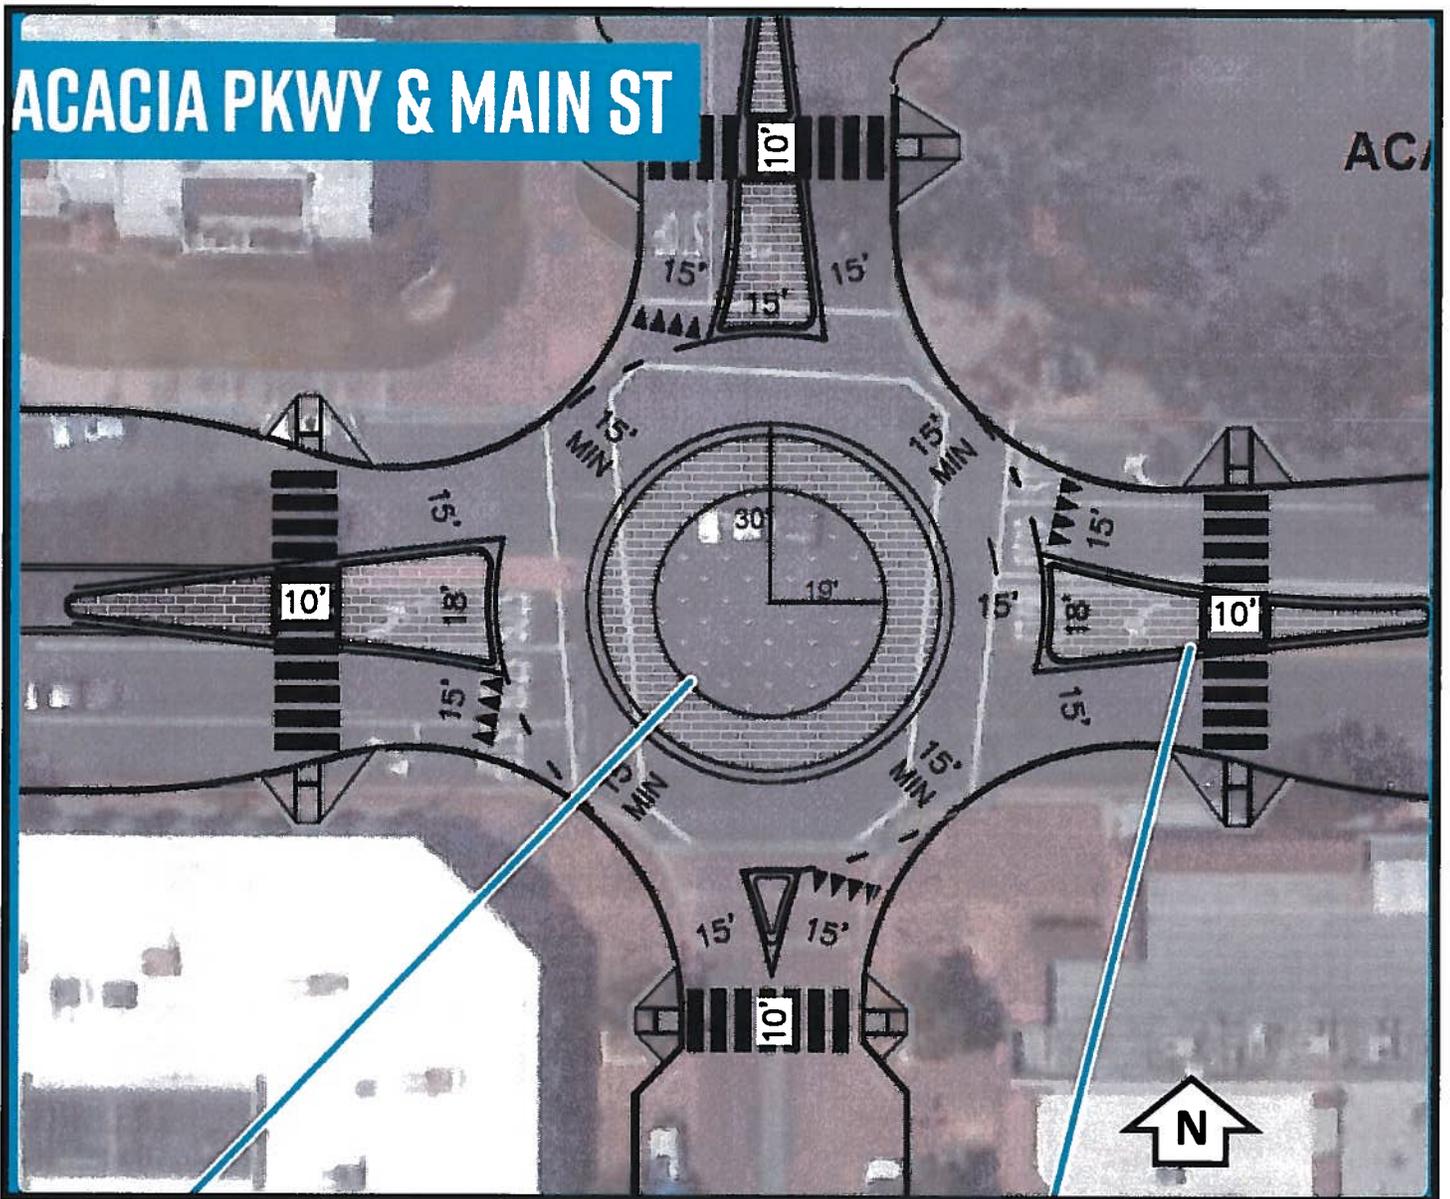

**Turning Circle—Main Street & Acacia Parkway — Concept**

## Main Street & Acacia Parkway Temporary Traffic Circle Concept



The Project proposes to erect a temporary traffic circle with a placemaking art installation for a period of eleven (11) months located in the City's downtown historic main street, at the intersection of Main Street and Acacia Parkway. The temporary traffic circle center piece will consist of stacked fruit crates to honor Garden Grove and Orange County's rich agricultural roots, surrounded by 5-gallon potted Japanese boxwood hedges, a circle of 42" tall looper reflective collar delineator tubes, safety yellow 6' long commercial parking blocks, and street striping. All four (4) corner crosswalks would be closed-off with stop sidewalk closed sandwich board signs and the existing crosswalks, and center-line striping would be removed. Eight (8) traffic circle signs on U-channel posts would be installed at specific locations to inform individuals of the approaching traffic circle. The single-lane traffic circle would be striped with splitter islands, pedestrian crosswalks, and yield lines. The temporary pedestrian crossings would be achieved by installing removable yellow boardwalk ramps and platforms that are ADA-compliant. The City would be required to remove approximately 50 linear feet of center median on the west side of Acacia Parkway replaced with street asphalt material in order to achieve the proper vehicle turning radius and clearance for the required 12'-wide pedestrian crosswalks.

## Main Street & Acacia Parkway Temporary Traffic Circle Concept