



GARDEN GROVE FIRE DEPARTMENT

Life Safety & Hazardous Materials Disclosure Program

11301 Acacia Parkway, Garden Grove, CA 92842
Bus 714-741-5600 Fax 714-741-5640

File # 120
Fire District 2319
Inspector FPB Shift N
Next Insp 4 / 2014

Occupant or DBA	CERTIFIED TIRE & SERVICE		Business Tel	714 636-2263
Address	9572 CHAPMAN Ave	Suite	Zip	92841
Business Owner	JEFF DARROW		Tel	[REDACTED]
Emergency Contact	_____		Tel	_____
Group	S3	Load	Sprinklers F/P/N	N
			5 yr. Cert.	/
			Haz Mat	<input checked="" type="checkbox"/>

Fire Permits 291021 MOTOR VEHICLE REPAIR / SERVICING, 801031 HAZARDOUS MATERIALS - use, handling or storage,

An inspection at the above location/occupancy revealed the following violations(s) :

ASSEMBLY OCCUPANCIES

- Post maximum occupancy load sign (CFC 1004.3)
- Remove combustibile decorative material (CFC 807.1.2)
- Remove storage under stairway (CFC 315.3.2)

SIGNS

- Provide address visible from the street (CFC 505.1)
- Provide hazardous materials warning signs (CFC 2703.5)

EXITS

- Provide/maintain approved panic hardware (CFC 1008.1.10)
- Remove locks, chains, bolts or bars from exit door (CFC 1008.1.9)
- Remove exit obstruction (CFC 1003.6)
- Provide/maintain illuminated exit sign(s) (CFC 1011.1)

ACCESS

- Provide outside Knox Box (CFC 506.1)
- Remove obstructions to fire apparatus access (CFC 503.4)

FIRE PROTECTION EQUIPMENT AND SYSTEMS

- Provide ___ extinguishers ___2A10BC ___40BC ___K (CFC 906.1)
- Service and tag extinguisher(s) (CFC 901.6)
- Hang extinguisher(s) 3.5'-5' from floor (CFC 906.9)
- Clean filters, ducts , hood above cooking surface (CFC 904.1)
- Service auto-extinguishing system semi-annually (CFC 904.11.6.2)
- 5 yr certification on sprinkler/standpipe system (Title 19, Sect. 904)

MISCELLANEOUS

- Lower storage 18" below sprinklers or 2' from ceiling (CFC 315.3.1)
- Secure compressed gas cylinders (CFC 5303.5.3)
- Post Business License Fire Department permit (CFC 105.3.5)

NO VIOLATIONS

ADDITIONAL VIOLATIONS AND/OR NOTES

ELECTRICAL SAFETY PRE-CAUTIONS

- Discontinue use of extension cords (CFC 605.5)
- Keep 30" clear for access in front of electrical panel (CFC 605.3)
- Provide/replace electrical Cover Socket Power Strip (CFC 605.1)

HAZ-MAT SAFETY PRE-CAUTIONS

- Provide approved cabinet if more than 10 gal. flammable liquids (CFC 5704.3.4.4)
- Provide approved safety container(s) for flammable liquids (CFC 5704.3.1)

HAZARDOUS MATERIALS DISCLOSURE

(HSC CHAPTER 6.95 Section 25404, 25500 - 25520)

- Failure to implement and/or electronically submit a HMBP www.esubmit.ocgov.com
- Chemical inventory is incomplete and/or requires updating *Minor*
- The Emergency Response Plan is inadequate and/or does not adequately address Notification, Mitigation, Evacuation and/or Employee Training
- Site Map is incomplete or insufficient
- Failure to report a change in business or chemical inventory within 30 days of the following :
 - 100% or more increase in the quantity of a disclosed material
 - Addition of a previously undisclosed material
 - Change of business name and owner
- Failure to report a release or threatened release
- Failure to submit annual certification
- NO VIOLATIONS
- MINOR VIOLATION
- CLASS II VIOLATION
- CLASS I VIOLATION

Business representative signature _____ Date _____

Inspector Name/ ID # Whittaker 9461 Date 6/18/14

Cleared 6/26/14 Mailback card due ___/___/___ Re-inspection date 6/25/14 Final Notice ___/___/___

GARDEN GROVE



FIRE DEPARTMENT

HAZARDOUS MATERIALS DISCLOSURE PROGRAM

REPORTING FORMS PACKET

SHORT VERSION

FOR OFFICIAL USE ONLY	
FACILITY ID NO.	<u>120</u>
BUSINESS NAME	<u>Certified Tire & Service</u>
BUSINESS ADDRESS	<u>9572 Chapman Ave</u>
APPROVED BY	<u>G</u> DATE <u>6/2011</u>
NEW BUSINESS	<input type="checkbox"/> YES <input type="checkbox"/> NO UPDATE _____
PICK	___ 4D ___ BUSLIST ___ CALARP: ___ CUPA: ___ GIS ___
FEE	_____



CITY OF GARDEN GROVE FIRE DEPARTMENT
11301 Acacia Parkway, Garden Grove, CA 92842 (714) 741-5600 (714) 741-5636
Hazardous Materials Business Information Form

FORM 1

BUSINESS INFORMATION

Facility (Supplied by GRED) 30035, Beginning Date, Ending Date, Business Name: CERTIlien Tire Goodyear, Business Phone: 626-2263, Business Site Address: 9572 Chapman Ave, City: GARDEN GROVE, State: CA, ZIP: 92841, Dun & Bradstreet, SIC Code: 7538, Fire District, County: ORANGE, Business Operator Name: William Doods

BUSINESS OWNER

Owner Name: JEFF DARROW, Owner M, City, State: CA, ZIP

ENVIRONMENTAL CONTACT

Contact Name: William Doods, Contact Phone: 714 626 2263, Contact Mailing Address: 9572 Chapman Ave, City: Garden Grove, State: CA, ZIP: 92841

PRIMARY EMERGENCY CONTACTS SECONDARY

Table with 3 columns: Name, Title, Business, 24-Hr P, Pager #. Primary: Jeff Darrow, Owner. Secondary: William Doods, Store Manager.

ADDITIONAL LOCALLY COLLECTED INFORMATION

Describe the type of business operation: Auto Repair, Total # of employees: 9, Billing address, Property owner name, address, phone

Certification: Based on my inquiry of those individuals responsible for obtaining the information, I certify under penalty of law that I have personally examined and am familiar with the information submitted and believe the information is true, accurate, and complete.

Signature of owner/preparer: William Doods, Date: 6/20/11, Name of signer: William Doods, Title of signer: Store Manager, Name of document preparer: William Doods, Title of document preparer: Store Manager

UNIFIED PROGRAM CONSOLIDATED FORM

FACILITY INFORMATION

BUSINESS ACTIVITIES

Page 1 of _____

I. FACILITY IDENTIFICATION										
FACILITY ID#										
1. EPA ID # (Hazardous Waste Only) 2.										
CAL000153631										

3. BUSINESS NAME (Same as FACILITY NAME or DBA-Doing Business As)	
Certified Tire and Service Centers INC	

II. ACTIVITIES DECLARATION

NOTE: If you check YES to any part of this list, please submit the Business Owner/Operator Identification page (OES Form 2730)

Does your facility...	If Yes, please complete these pages of the UPCF...		
A. HAZARDOUS MATERIALS Have on site (for any purpose) hazardous materials at or above 55 gallons for liquids, 500 pounds for solids, or 200 cubic feet for compressed gases (include liquids in ASTs and USTs); or the applicable Federal threshold quantity for an extremely hazardous substance specified in 40 CFR Part 355, Appendix A or B; or handle radiological materials in quantities for which an emergency plan is required pursuant to 10 CFR Parts 30, 40 or 70?	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	4. ✓ HAZARDOUS MATERIALS INVENTORY - CHEMICAL DESCRIPTION (OES 2731)
B. UNDERGROUND STORAGE TANKS (USTs) 1. Own or operate underground storage tanks? 2. Intent to upgrade existing or install new USTs? 3. Need to report closing a UST?	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	5. ✓ UST FACILITY (Formerly SWRCB Form A) 6. ✓ UST TANK (one page per tank) (Formerly Form B) 7. ✓ UST FACILITY ✓ UST TANK (one per tank) ✓ UST INSTALLATION - CERTIFICATE OF COMPLIANCE (one page per tank) (Formerly Form C) 7. ✓ UST TANK (closure portion-one page per tank)
C. ABOVE GROUND PETROLEUM STORAGE TANKS (ASTs) Own or operate ASTs above these thresholds: - any tank capacity is greater than 660 gallons, or - the total aggregate capacity for the entire facility (ASTs, drums and portable containers) greater than 1,320 gallons?	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	8. ✓ NO FORM REQUIRED TO CUPAS
D. HAZARDOUS WASTE 1. Generate hazardous waste? 2. Recycle more than 100 kg/month of excluded or exempted recyclable materials (per HSC §25143.2)? 3. Treat hazardous waste on site? 4. Treatment subject to financial assurance requirements (for Permit by Rule and Condition Authorization)? 5. Consolidate hazardous waste generated at a remove site? 6. Need to report the closure/removal of a tank that was classified waste and cleaned onsite?	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	9. ✓ EPA ID NUMBER - provide at the top of this page
	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	10. ✓ RECYCLABLE MATERIALS REPORT (one per recycler)
	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	11. ✓ ONSITE HAZARDOUS WASTE TREATMENT - FACILITY (Formerly DTSC Forms 1772) ✓ ONSITE HAZARDOUS WASTE TREATMENT - UNIT (one page per unit) (Formerly DTSC Forms 1772A,B,C,D and L)
	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	12. ✓ CERTIFICATION OF FINANCIAL ASSURANCE (Formerly DTSC Form 1232)
	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	13. ✓ REMOTE WASTE/CONSOLIDATION SITE ANNUAL NOTIFICATION (Formerly DTSC Form 1196)
	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	14. ✓ HAZARDOUS WASTE TANK CLOSURE CERTIFICATION (Formerly DTSC Form 1249)

15. E. LOCAL REQUIREMENTS (You may also be required to provide additional information by your CUPA or local agency.)	
--	--

CALIFORNIA CHEMICAL INVENTORY FORM - DESCRIPTION PAGE

(1) ADD DELETE REVISE NO CHANGE

PAGE (2) 3 OF 3 6

BUSINESS NAME (4) Certified Tire
CHEMICAL LOCATION (5) 9522 Chapman Ave
MAP # (if more than one) (6) GRID # (7) I 6

CHEMICAL NAME (8) ANTI-freeze
COMMON NAME (9) ANTI-freeze
CAS # (10) 107-21-1
FIRE CODE HAZARD CLASSES* (13) Comb Liq

TRADE SECRET (11) Y N
AHM/*EHS (12) Y N
*IF EHS BOX IS "Y"
ALL AMOUNTS MUST BE IN LBS


*COMPLETE BLOCK (13) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.

TYPE (14) PURE MIXTURE WASTE
PHYSICAL STATE (17) SOLID LIQUID GAS
FED HAZARD CATEGORIES (18) FIRE REACTIVE PRESSURE RELEASE ACUTE HEALTH CHRONIC HEALTH
STATE WASTE CODE (19) UNITS (22) GAL CU FT
DAYS ON SITE (20) 365 *If EHS, amounts must be in lbs.
LARGEST CONTAINER (21) 55gal
STORAGE CONTAINER (26) ABOVE GROUND TANK - INSIDE CAN BOX(S) TANK WAGON
PRESSURE STORAGE (27) AMBIENT ABOVE AMBIENT BELOW AMBIENT
STORAGE TEMPERATURE (28) AMBIENT ABOVE AMBIENT BELOW AMBIENT CRYOGENIC

Table with 3 columns: (29) % WT, (30) HAZARDOUS COMPONENTS, (31) EHS/AHM, (32) CAS #. Rows include 6-Thylene Glycol, Sodium Hydroxide, and Dioxane.

(33) ADDITIONAL LOCALLY COLLECTED INFORMATION *COMPLETE BLOCK (33) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.

NFPA CLASSIFICATION
UN/DOT # 1986
DOT HAZARD CLASS 3
UFC HAZARD CLASS Comb Liq

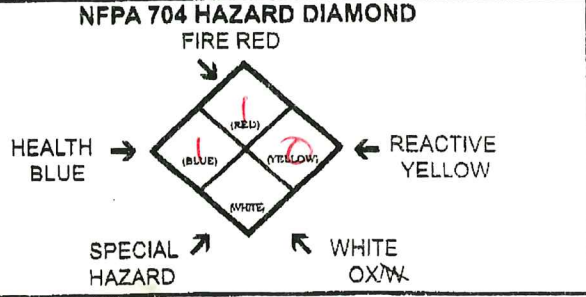

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED

DATA SHEET

PRODUCT NUMBER: 547278 Zerex Antifreeze

SECTION I

*Registered Trademark

TRADE NAME: Zerex Antifreeze

CHEMICAL NAME: Inhibited Ethylene Glycol

SYNONYMS: Permanent Antifreeze,
Engine Coolant

FORMULA: Mixture

CHEMICAL FAMILY: Glycols

MOL. WGT.: N/A

SECTION II - INGREDIENTS

COMPONENT	CAS NO.	%	PEL/TLV - SOURCE
Zerex Antifreeze		100	Not established
Contains:			
Ethylene glycol	107-21-1	-94	50 ppm C ACGIH, OSHA Final
Phosphates	7758-11-4	< 2	Not established
Proprietary additives	N/A	< 4	Not established
SARA Title III Sect. 313: Listed.			

SECTION III - PHYSICAL DATA

BOILING/MELTING POINT @760 mm Hg: 330°F/ N/A

pH: 9.0-11.0

VAPOR PRESSURE mm Hg @20 C: 18

SPECIFIC GRAVITY OR BULK DENSITY: 1.135

SOLUBILITY IN WATER: Infinite

APPEARANCE: Green Dyed Liquid

ODOR: Glycol

INTENSITY: Faint

SECTION IV - FIRE AND EXPLOSION HAZARD DATA

FLASH POINT (TEST METHOD): 250°F C.O.C.

AUTOIGNITION TEMP: 775°F

FLAMMABILITY LIMITS IN AIR (% BY VOL)

LOWER: N/A

UPPER: N/A

EXTINGUISHING MEDIUM

Use water fog, alcohol foam, CO2 or dry chemical extinguishing media. NFPA: 1/1/0

SPECIAL FIREFIGHTING PROCEDURES

Firefighters should be equipped with self-contained breathing apparatus and turnout gear. Avoid breathing vapors or fumes of heated or burning product.

UNUSUAL FIRE AND EXPLOSION HAZARDS

Vapors from heated (above flash point) product may travel to a source of ignition and flash back.

EMERGENCY TELEPHONE NUMBER

CHEMTREC 800-424-9300

201-316-3000

THIS NUMBER IS AVAILABLE DAYS, NIGHTS, WEEKENDS AND HOLIDAYS

PRODUCT NUMBER: 547278 Zerex Antifreeze

SECTION VIII - ENVIRONMENTAL DATA

ENVIRONMENTAL TOXICITY DATA:

Fish Toxicity: LC50 = 1400 mg/l (Bluegill, 96 hour)

SPILL AND LEAK PROCEDURES:

Spills should be contained, solidified, and placed in suitable containers for disposal. This material is not regulated under RCRA or CERCLA ("Superfund"). Clean up quickly as spills are a slipping hazard.

HAZARDOUS SUBSTANCE SUPERFUND: No RQ (lbs):

WASTE DISPOSAL METHOD:

Incinerate or bury in a licensed facility. Do not discharge into waterways. Discharge to sewer systems with prior approvals is acceptable.

HAZARDOUS WASTE 40CFR261: No HAZARDOUS WASTE NUMBER:

CONTAINER DISPOSAL:

Dispose of in licensed facility. Recommend crushing or other means to prevent unauthorized reuse.

SECTION IX - SHIPPING DATA

D.O.T. PROPER SHIPPING NAME (49CFR172.101-102)

None

HAZARDOUS SUBSTANCE (49CFR CERCLA LIST)

No

REPORTABLE QUANTITY (RQ) None

D.O.T. HAZARD CLASSIFICATION (CFR172.101-102)

PRIMARY
None

SECONDARY
N/A

D.O.T. LABELS REQUIRED (49CFR172.101-102)

None

D.O.T. PLACARDS REQUIRED (CFR172.504)

None

POISON CONSTITUENT (49CFR172.203(K))
N/A

BILL OF LADING DESCRIPTION

Antifreeze Preparations, Proprietary
(Ethylene Glycol Base)

CC NO. 332

UN/NA CODE None

DATE PREPARED: 3 / 29 / 88

UPDATED: 9 / 12 / 89

WHILE BASF CORPORATION BELIEVES THE DATA SET FORTH HEREIN ARE ACCURATE AS OF THE DATE HEREOF, BASF CORPORATION MAKES NO WARRANTY WITH RESPECT THERETO AND EXPRESSLY DISCLAIMS ALL LIABILITY FOR RELIANCE THEREON. SUCH DATA ARE OFFERED SOLELY FOR YOUR CONSIDERATION, INVESTIGATION, AND VERIFICATION.

CALIFORNIA CHEMICAL INVENTORY FORM – DESCRIPTION PAGE

(1) ADD DELETE REVISE NO CHANGE

PAGE (2) 6 OF 3) 6

BUSINESS NAME (4) Certified Fire
 CHEMICAL LOCATION (5) 9572 Chapman Ave East Wall in Shop
 MAP # (if more than one) (6) _____ GRID # (7) E5

CHEMICAL NAME (8) Automatic Trans fluid TRADE SECRET (11) Y N
 COMMON NAME (9) Trans fluid AHM / *EHS (12) Y N
 CAS # (10) 64742-65-0
 FIRE CODE HAZARD CLASSES* (13) COMP LIQ CIII

*IF EHS BOX IS "Y"
 ALL AMOUNTS MUST BE IN LBS


*COMPLETE BLOCK (13) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.

TYPE (14) PURE MIXTURE WASTE CHECK IF RADIOACTIVE (15) (16) _____
 PHYSICAL STATE (17) SOLID LIQUID GAS CURIES _____
 FED HAZARD CATEGORIES (18) FIRE REACTIVE PRESSURE RELEASE ACUTE HEALTH CHRONIC HEALTH
 STATE WASTE CODE (19) 221 UNITS (22) GAL CU FT LBS TONS MAX DAILY AMT (23) 240
 DAYS ON SITE (20) 365 *If EHS, amounts must be in lbs. AVG DAILY AMT (24) 4 gal
 LARGEST CONTAINER (21) 240 ANNUAL WASTE AMT (25) 1000
 STORAGE CONTAINER (26) ABOVE GROUND TANK - INSIDE CAN BOX(S) TANK WAGON
 UNDER GROUND TANK CARBOY CYLINDER RAIL CAR
 TANK INSIDE BUILDING SILO GLASS CONTAINER
 STEEL DRUM FIBER DRUM PLASTIC CONTAINER Other
 PLASTIC/NONMETALLIC DRUM BAG(S) IN MACHINERY OR EQUIP.
 PRESSURE STORAGE (27) AMBIENT ABOVE AMBIENT BELOW AMBIENT
 STORAGE TEMPERATURE (28) AMBIENT ABOVE AMBIENT BELOW AMBIENT CRYOGENIC

(29) % WT	(30) HAZARDOUS COMPONENTS	(31) EHS/AHM	(32) CAS #
1.	<u>Petroleum Distillates</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	<u>64742-65-0</u>
2.	<u>Polymethylacrylate</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	<u>64742-53-6</u>
3.	<u>Boronated hydrocarbyl Succinimide</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	<u>50867-55-5</u>

(33) **ADDITIONAL LOCALLY COLLECTED INFORMATION**
 *COMPLETE BLOCK (33) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.

NFPA CLASSIFICATION _____
 UN/DOT # 1270
 Refer to shipping papers or MSDS
 DOT HAZARD CLASS 3
 Refer to shipping papers or MSDS
 UFC HAZARD CLASS COMP LIQ

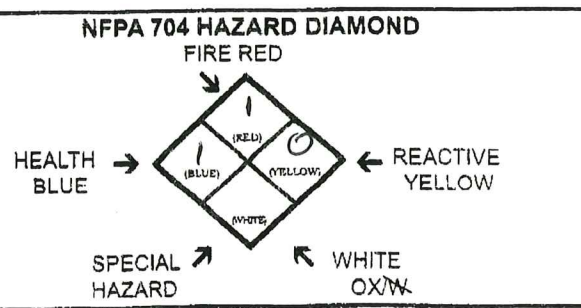

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED

72-62-7825-11

MATERIAL SAFETY DATA SHEET



THE VALVOLINE COMPANY

Division of Ashland Oil, Inc.
P.O. BOX 14000
LEXINGTON, KENTUCKY 40512
(606) 264-7000

Emergency Telephone
1 (800) 274-5263 or
1-800-ASHLAND

000288

DEXRON III/MERCON
THIS MSDS COMPLIES WITH 29 CFR 1910.1200 (THE HAZARD COMMUNICATION STANDARD)

Product Name: DEXRON III/MERCON

Data Sheet No: 0200299-006.005
Prepared: 11/22/94
Supersedes: 11/16/94
Print Date: 01/07/95

SKS, INC.
DBA INLAND OIL
PO BOX 26940

SAN DIEGO CA 92196-094
ATTN: PLANT MGR / SAFETY DIR.

08 70 000 0875876-003

PRODUCT: 52638302
INVOICE: 832459
INVOICE DATE: 06/30/94
TO: INLAND OIL CO
DBA SKS, INC
1948 LYNX PLACE CA 91761
ONTARIO

SECTION I-PRODUCT IDENTIFICATION

General or Generic ID: PETROLEUM BASED-LUBRICATING OIL

SECTION II-COMPONENTS

IF PRESENT, IARC, NTP AND OSHA CARCINOGENS AND CHEMICALS SUBJECT TO THE REPORTING REQUIREMENTS OF SARA TITLE III SECTION 313 ARE IDENTIFIED IN THIS SECTION. SEE DEFINITION PAGE FOR CLARIFICATION

Table with 5 columns: INGREDIENT, Percent, PEL, TLV, Note. Includes TRANSMISSION FLUID PACKAGE and PETROLEUM LUBE OIL.

Notes:

- (1) PEL/TLV NOT ESTABLISHED FOR THIS MATERIAL
(2) PEL/TLV IS FOR OIL MIST. ACGIH SHORT TERM EXPOSURE LIMIT (STEL) FOR OIL MIST IS 10 MG/CUM.

SECTION III-PHYSICAL DATA

Table with 2 columns: Property, Value. Includes Boiling Point, Vapor Pressure, Specific Vapor Density, Specific Gravity, Percent Volatiles, Evaporation Rate, Appearance, State, Form.

SECTION IV-FIRE AND EXPLOSION INFORMATION

FLASH POINT(COC) 365.0 Deg F (185.0 Deg C)
EXPLOSIVE LIMIT UNAVAILABLE
EXTINGUISHING MEDIA: REGULAR FOAM OR CARBON DIOXIDE OR DRY CHEMICAL
HAZARDOUS DECOMPOSITION PRODUCTS: MAY FORM TOXIC MATERIALS:, CARBON DIOXIDE AND CARBON MONOXIDE, VARIOUS HYDROCARBONS, ETC.
FIREFIGHTING PROCEDURES: WEAR SELF-CONTAINED BREATHING APPARATUS WITH A FULL FACEPIECE OPERATED IN THE POSITIVE PRESSURE DEMAND MODE WHEN FIGHTING FIRES.
WATER OR FOAM MAY CAUSE FROTHING WHICH CAN BE VIOLENT AND POSSIBLY ENDANGER THE LIFE OF THE FIREFIGHTER, ESPECIALLY IF SPRAYED INTO CONTAINERS OF HOT, BURNING LIQUID.
DENSE SMOKE MAY BE GENERATED WHILE BURNING.
SPECIAL FIRE & EXPLOSION HAZARDS: NEVER USE WELDING OR CUTTING TORCH ON OR NEAR DRUM (EVEN EMPTY) BECAUSE PRODUCT (EVEN JUST RESIDUE) CAN IGNITE EXPLOSIVELY.

NFPA CODES: HEALTH- 1 FLAMMABILITY- 1 REACTIVITY- 0

SECTION V-HEALTH HAZARD DATA

PERMISSIBLE EXPOSURE LEVEL: NOT ESTABLISHED FOR PRODUCT. SEE SECTION II.

MAR 17 1995



000288

DEXRON III/MERCON

Page: 2

SECTION V-HEALTH HAZARD DATA (Continued)**EFFECTS OF ACUTE OVEREXPOSURE:**

EYES - EXPOSURE IS NOT EXPECTED TO CAUSE EYE IRRITATION OR INJURY.
 SKIN - EXPOSURE MAY CAUSE MILD SKIN IRRITATION. PROLONGED OR REPEATED EXPOSURE MAY DRY THE SKIN. SYMPTOMS MAY INCLUDE REDNESS, BURNING, DRYING AND CRACKING, AND SKIN BURNS. PRE-EXISTING SKIN DISORDERS MAY BE AGGRAVATED BY EXPOSURE TO THIS MATERIAL.
 BREATHING - EXPOSURE IS POSSIBLE UNDER CERTAIN CONDITIONS OF HANDLING AND USE (E.G., DURING HEATING, SPRAYING, OR STIRRING).
 SYMPTOMS ARE MORE TYPICALLY SEEN AT AIR CONCENTRATIONS EXCEEDING THE RECOMMENDED EXPOSURE LIMITS. SYMPTOMS OF EXPOSURE MAY INCLUDE:
 - IRRITATION (NOSE, THROAT, RESPIRATORY TRACT)- PRE-EXISTING LUNG DISORDERS, E.G. ASTHMA-LIKE CONDITIONS, MAY BE AGGRAVATED BY EXPOSURE TO THIS MATERIAL.
 SWALLOWING - SINGLE DOSE ORAL TOXICITY IS LOW. SWALLOWING SMALL AMOUNTS DURING NORMAL HANDLING IS NOT LIKELY TO CAUSE HARMFUL EFFECTS; SWALLOWING LARGE AMOUNTS MAY BE HARMFUL.
 SYMPTOMS MAY INCLUDE:
 - GASTROINTESTINAL IRRITATION (NAUSEA, VOMITING, DIARRHEA)-
 - ABDOMINAL PAIN-

FIRST AID:

IF ON SKIN: THOROUGHLY WASH EXPOSED AREA WITH SOAP AND WATER. REMOVE CONTAMINATED CLOTHING. LAUNDER CONTAMINATED CLOTHING BEFORE RE-USE.
 IF IN EYES: FLUSH WITH LARGE AMOUNTS OF WATER, LIFTING UPPER AND LOWER LIDS OCCASIONALLY. IF IRRITATION PERSISTS, GET MEDICAL ATTENTION.
 IF SWALLOWED: DO NOT INDUCE VOMITING, KEEP PERSON WARM AND QUIET, AND GET MEDICAL ATTENTION.
 IF BREATHED: REMOVE INDIVIDUAL TO FRESH AIR.

EFFECTS OF CHRONIC OVEREXPOSURE:

NONE CURRENTLY KNOWN FOR THE PRODUCT.

SECTION VI-REACTIVITY DATA

HAZARDOUS POLYMERIZATION: CANNOT OCCUR

STABILITY: STABLE

INCOMPATIBILITY: AVOID CONTACT WITH: , STRONG OXIDIZING AGENTS

SECTION VII-SPILL OR LEAK PROCEDURES**STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:**

SMALL SPILL: ABSORB LIQUID ON VERMICULITE, FLOOR ABSORBENT OR OTHER ABSORBENT MATERIAL.

LARGE SPILL: PREVENT RUN-OFF TO SEWERS, STREAMS OR OTHER BODIES OF WATER. IF RUN-OFF OCCURS, NOTIFY PROPER AUTHORITIES AS REQUIRED, THAT A SPILL HAS OCCURED.

PERSONS NOT WEARING PROTECTIVE EQUIPMENT SHOULD BE EXCLUDED FROM AREA OF SPILL UNTIL CLEAN-UP HAS BEEN COMPLETED. STOP SPILL AT SOURCE, DIKE AREA OF SPILL TO PREVENT SPREADING, PUMP LIQUID TO SALVAGE TANK. REMAINING LIQUID MAY BE TAKEN UP ON SAND, CLAY, EARTH, FLOOR ABSORBENT, OR OTHER ABSORBENT MATERIAL AND SHOVELED INTO CONTAINERS.

WASTE DISPOSAL METHOD:

SMALL SPILL: DISPOSE OF IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL REGULATIONS.

LARGE SPILL: DISPOSE OF IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS.

SECTION VIII-PROTECTIVE EQUIPMENT TO BE USED

RESPIRATORY PROTECTION: NOT REQUIRED UNDER NORMAL CONDITIONS OF USE. HOWEVER, IF OIL MISTS ARE GENERATED ABOVE RECOMMENDED PEL/TLV OF 5 MG/M³, THEN A NIOSH/MSHA APPROVED RESPIRATOR IS ADVISED IN ABSENCE OF PROPER ENVIRONMENTAL CONTROL. (SEE YOUR INDUSTRIAL HYGIENIST).

VENTILATION: NOT REQUIRED UNDER NORMAL CONDITIONS OF USE. HOWEVER, IF UNUSUAL OPERATING CONDITIONS EXIST, THEN PROVIDE SUFFICIENT MECHANICAL (GENERAL AND/OR LOCAL EXHAUST) VENTILATION TO MAINTAIN EXPOSURE BELOW PEL/TLV (S).

PROTECTIVE GLOVES: NOT NORMALLY REQUIRED. HOWEVER, WEAR RESISTANT GLOVES SUCH AS NITRILE RUBBER TO PREVENT IRRITATION WHICH MAY RESULT FROM PROLONGED OR REPEATED SKIN CONTACT WITH PRODUCT.

EYE PROTECTION: NOT REQUIRED UNDER NORMAL CONDITIONS OF USE. HOWEVER, IF MISTING OR SPLASHING CONDITIONS EXIST, THEN SAFETY GLASSES OR CHEMICAL SPLASH GOGGLES ARE ADVISED.

OTHER PROTECTIVE EQUIPMENT: NORMAL WORK CLOTHING COVERING ARMS AND LEGS.

SECTION IX-SPECIAL PRECAUTIONS OR OTHER COMMENTS

CONTAINERS OF THIS MATERIAL MAY BE HAZARDOUS WHEN EMPTIED. SINCE EMPTIED CONTAINERS RETAIN PRODUCT RESIDUES (VAPOR, LIQUID, AND/OR SOLID), ALL HAZARD PRECAUTIONS GIVEN IN THIS DATASHEET MUST BE OBSERVED.

THE INFORMATION ACCUMULATED HEREIN IS BELIEVED TO BE ACCURATE BUT IS NOT WARRANTED TO BE WHETHER ORIGINATING WITH THE COMPANY OR NOT. RECIPIENTS ARE ADVISED TO CONFIRM IN ADVANCE OF NEED THAT THE INFORMATION IS CURRENT, APPLICABLE, AND SUITABLE TO THEIR CIRCUMSTANCES.

SECTION X-LABEL INFORMATION**CAUTION!**

MAY CAUSE SLIGHT EYE IRRITATION.

MAR 07 1995

CONTINUED ON PAGE: 3



000288

DEXRON III/MERCON

Page: 3

SECTION X-LABEL INFORMATION (Continued)

PROLONGED OR REPEATED CONTACT MAY CAUSE SKIN DISORDERS.
SWALLOWING MAY CAUSE STOMACH CRAMPS AND DIARRHEA.

HANDLING & STORAGE:

AVOID CONTACT WITH EYES AND SKIN. WEAR SAFETY GLASSES OR GOGGLES, RESISTANT GLOVES, AND OTHER APPROPRIATE PROTECTIVE EQUIPMENT ESSENTIAL FOR YOUR OPERATION. USE NIOSH-APPROVED RESPIRATOR IF EXPOSED TO OIL MIST. DO NOT TRANSFER TO UNLABELED CONTAINER. DO NOT USE CUTTING OR WELDING TORCH ON THIS CONTAINER (EVEN EMPTY). BEFORE USE, REVIEW MATERIAL SAFETY DATA SHEET FOR MORE DETAILED INFORMATION, INCLUDING CHRONIC HEALTH EFFECTS.

FIRST AID:

EYES: FLUSH THOROUGHLY WITH WATER. GET MEDICAL ATTENTION IF IRRITATION PERSISTS.
SKIN: WASH EXPOSED AREAS WITH SOAP AND WATER. GET MEDICAL ATTENTION IF SKIN DISORDERS DEVELOP.
INHALATION: IF AFFECTED BY OIL MIST, REMOVE TO FRESH AIR.
INGESTION: DO NOT INDUCE VOMITING. CALL A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY.

CHRONIC INFORMATION:

OVEREXPOSURE CURRENTLY UNKNOWN FOR THE PRODUCT. CONTAINS: PETROLEUM OIL AND PROPRIETARY OIL ADDITIVES.
*** COMPONENTS APPEAR IN SECTION II ***

MAR 07 1995

CALIFORNIA CHEMICAL INVENTORY FORM - DESCRIPTION PAGE

(1) ADD DELETE REVISE NO CHANGE

PAGE (2) 4 OF 3) 6

BUSINESS NAME (4) Certified Tire Goodyear
 CHEMICAL LOCATION (Address, Area, Building, etc.) (5) 9572 Chapman Ave GARDEN GROVE 92841
 MAP # (if more than one) (6) _____ GRID # (7) D-6

CHEMICAL NAME (8) MOTOR OIL TRADE SECRET (11) Y N
 COMMON NAME (9) MOTOR OIL AHM / *EHS (12) Y N
 CAS # (10) MIXTURE 64742-65-0 *IF EHS BOX IS "Y" ALL AMOUNTS MUST BE IN LBS
 FIRE CODE HAZARD CLASSES* (13) COMP LIQ

***COMPLETE BLOCK (13) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.**

TYPE (14) PURE MIXTURE WASTE CHECK IF RADIOACTIVE (15) (16) _____
 PHYSICAL STATE (17) SOLID LIQUID GAS CURIES _____
 FED HAZARD CATEGORIES (18) FIRE REACTIVE PRESSURE RELEASE ACUTE HEALTH CHRONIC HEALTH
 STATE WASTE CODE (19) _____ UNITS (22) GAL CU FT LBS TONS MAX DAILY AMT (23) 240 GA
 DAYS ON SITE (20) 365 *If EHS, amounts must be in lbs. AVG DAILY AMT (24) 240 GA
 LARGEST CONTAINER (21) 240 GA ANNUAL WASTE AMT (25) _____
 STORAGE CONTAINER (26) ABOVE GROUND TANK - INSIDE CAN BOX(S) TANK WAGON
 UNDER GROUND TANK CARBOY CYLINDER RAIL CAR
 TANK INSIDE BUILDING SILO GLASS CONTAINER
 STEEL DRUM FIBER DRUM PLASTIC CONTAINER Other
 PLASTIC/NONMETALLIC DRUM BAG(S) IN MACHINERY OR EQUIP.
 PRESSURE STORAGE (27) AMBIENT ABOVE AMBIENT BELOW AMBIENT
 STORAGE TEMPERATURE (28) AMBIENT ABOVE AMBIENT BELOW AMBIENT CRYOGENIC

(29) % WT	(30) HAZARDOUS COMPONENTS	(31) EHS/AHM	(32) CAS #
1.	<u>HydroTreated Paraffinic Petroleum distillates</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	<u>64742-54-7</u>
2.	<u>Solvent-dewaxed Heavy Paraffinic Petroleum Distillates</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	<u>64742-65-0</u>
3.	<u>Alkylbenzene Sulfonates</u>	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N	

(33) **ADDITIONAL LOCALLY COLLECTED INFORMATION**
***COMPLETE BLOCK (33) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.**

NFPA CLASSIFICATION

UN/DOT # 1270 Refer to shipping papers or MSDS

DOT HAZARD CLASS 3 Refer to shipping papers or MSDS

UFC HAZARD CLASS COMP LIQ

NFPA 704 HAZARD DIAMOND

FIRE RED

HEALTH BLUE → ← REACTIVE YELLOW

SPECIAL HAZARD ↗ WHITE OX/W ↖

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED

MATERIAL SAFETY DATA SHEET



1. PRODUCT IDENTIFICATION

MANUFACTURER'S NAME PENNZOIL COMPANY

CAS NUMBER: MIXTURE
MSDS CODE: 000303 CLASS#

ADDRESS P.O. BOX 2967
HOUSTON, TX 77252-2967

NFPA HAZARD IDENTIFICATION
DEGREE OF HAZARD HAZARD RATINGS
0-LEAST
HEALTH: 1 1-SLIGHT
FIRE: 1 2-MODERATE
REACTIVITY: 0 3-HIGH
4-EXTREME

EMERGENCY TELEPHONE NO. (800) 546-6040

TRADE NAME: PENNZOIL® MOTOR OIL SAE 10W-40

SYNONYMS: HD 200 SAE 10W-40, SPECIAL PERFORMANCE MOTOR OIL 10W-40

BY: ENVIRONMENTAL, SAFETY & HEALTH
(800) 546-6227

EFFECTIVE DATE: JULY 14, 1995
SUPERSEDES DATE: AUGUST 03, 1994

2. INGREDIENTS

COMPONENT NAME CAS NUMBER	HAZARDOUS	PERCENTAGE		COMPONENT EXPOSURE LIMIT	UNIT
	IN BLEND	MIN	MAX		
BASE LUBRICATING OILS MIXTURE	NO	75	TO 85	OSHA PEL ACGIH TLV	NO LIMIT NO LIMIT
DETERGENT/INHIBITOR SYSTEM MIXTURE	NO	5	TO 15	OSHA PEL ACGIH TLV	NO LIMIT NO LIMIT
VISCOSITY INDEX IMPROVER MIXTURE	NO	5	TO 15	OSHA PEL ACGIH TLV	NO LIMIT NO LIMIT
POUR POINT DEPRESSANT MIXTURE	NO		< 1	OSHA PEL ACGIH TLV	NO LIMIT NO LIMIT

3. HEALTH INFORMATION AND PROTECTION

EYE CONTACT: THIS PRODUCT IS PRACTICALLY NON-IRRITATING TO THE EYES UPON DIRECT CONTACT. BASED ON TESTING OF SIMILAR PRODUCTS AND/OR COMPONENTS.

SKIN CONTACT: AVOID SKIN CONTACT. THIS PRODUCT IS MINIMALLY IRRITATING TO THE SKIN UPON DIRECT CONTACT. BASED ON TESTING OF SIMILAR PRODUCTS AND/OR COMPONENTS. PROLONGED OR REPEATED CONTACT MAY RESULT IN CONTACT DERMATITIS WHICH IS CHARACTERIZED BY DRYNESS, CHAPPING, AND REDDENING. THIS CONDITION MAY MAKE THE SKIN MORE SUSCEPTIBLE TO OTHER IRRITANTS, SENSITIZERS, AND DISEASE. PROLONGED OR REPEATED CONTACT MAY RESULT IN OIL ACNE WHICH IS CHARACTERIZED BY BLACKHEADS WITH POSSIBLE SECONDARY INFECTION. SEE HEALTH DATA SECTION BELOW.

- INHALATION:** THIS PRODUCT HAS A LOW VAPOR PRESSURE AND IS NOT EXPECTED TO PRESENT AN INHALATION HAZARD AT AMBIENT CONDITIONS. CAUTION SHOULD BE TAKEN TO PREVENT AEROSOLIZATION OR MISTING OF THIS PRODUCT. THE PERMISSABLE EXPOSURE LIMIT (PEL) AND THRESHOLD LIMIT VALUE (TLV) FOR THIS PRODUCT AS OIL MIST IS 5 MG/M3. EXPOSURES BELOW 5 MG/M3 APPEAR TO BE WITHOUT SIGNIFICANT HEALTH RISK. THE SHORT-TERM EXPOSURE LIMIT FOR THIS PRODUCT AS AN OIL MIST IS 10 MG/M3.
- INGESTION:** DO NOT INGEST. THIS PRODUCT IS RELATIVELY NON-TOXIC BY INGESTION. THIS PRODUCT HAS LAXATIVE PROPERTIES AND MAY RESULT IN ABDOMINAL CRAMPS AND DIARRHEA. SEE HEALTH DATA SECTION BELOW.
- HEALTH DATA:** ON RARE OCCASIONS, PROLONGED AND REPEATED EXPOSURE TO OIL MIST POSES A RISK OF PULMONARY DISEASE SUCH AS CHRONIC LUNG INFLAMMATION. THIS CONDITION IS USUALLY ASYMPTOMATIC AS A RESULT OF REPEATED SMALL ASPIRATIONS. SHORTNESS OF BREATH AND COUGH ARE THE MOST COMMON SYMPTOMS.
- THE INTERNATIONAL AGENCY FOR RESEARCH ON CANCER HAS CONCLUDED THERE ARE INADEQUATE DATA TO EVALUATE THE CARCINOGENICITY TO EXPERIMENTAL ANIMALS OF THIS CLASS OF PRODUCTS. THUS THIS PRODUCT BELONGS TO IARC CLASSIFICATION GROUP 3, "NOT CLASSIFIABLE AS TO ITS CARCINOGENICITY TO HUMANS." THIS PRODUCT IS NOT CARCINOGENIC ACCORDING TO THE OSHA HAZARD COMMUNICATION STANDARD.
- FOR GASOLINE-ENGINE MOTOR OILS ONLY. AVOID SKIN CONTACT WITH USED MOTOR OILS. THE IARC HAS CONCLUDED THERE IS SUFFICIENT EVIDENCE THAT USED GASOLINE-ENGINE MOTOR OILS PRODUCE SKIN TUMORS IN EXPERIMENTAL ANIMALS.

4. EMERGENCY & FIRST AID PROCEDURES

- EYE CONTACT:** IMMEDIATELY FLUSH EYES WITH LARGE AMOUNTS OF WATER AND CONTINUE FLUSHING UNTIL IRRITATION SUBSIDES. IF MATERIAL IS HOT, TREAT FOR THERMAL BURNS AND TAKE VICTIM TO HOSPITAL IMMEDIATELY.
- SKIN CONTACT:** REMOVE CONTAMINATED CLOTHING. WASH CONTAMINATED AREA THOROUGHLY WITH SOAP AND WATER. IF MATERIAL IS HOT, SUBMERGE INJURED AREA IN COLD WATER. IF VICTIM IS SEVERELY BURNED, REMOVE TO A HOSPITAL IMMEDIATELY.
- INHALATION:** THIS MATERIAL HAS A LOW VAPOR PRESSURE AND IS NOT EXPECTED TO PRESENT AN INHALATION EXPOSURE AT AMBIENT CONDITIONS.
- INGESTION:** DO NOT INDUCE VOMITING. SEEK MEDICAL ATTENTION.

5. PERSONAL HEALTH PROTECTION INFORMATION

- EYE PROTECTION:** EYE PROTECTION IS NOT REQUIRED UNDER CONDITIONS OF NORMAL USE. IF MATERIAL IS HANDLED SUCH THAT IT COULD BE SPLASHED INTO EYES, WEAR PLASTIC FACE SHIELD OR SPLASH-PROOF SAFETY GOGGLES.
- SKIN PROTECTION:** NO SKIN PROTECTION IS REQUIRED FOR SINGLE, SHORT DURATION EXPOSURES. FOR PROLONGED OR REPEATED EXPOSURES, USE IMPERVIOUS CLOTHING (BOOTS, GLOVES, APRONS, ETC.) OVER PARTS OF THE BODY SUBJECT TO EXPOSURE. IF HANDLING HOT MATERIAL, USE INSULATED PROTECTIVE CLOTHING (BOOTS, GLOVES, APRONS, ETC.). LAUNDRER SOILED CLOTHES. PROPERLY DISPOSE OF CONTAMINATED LEATHER ARTICLES INCLUDING SHOES, WHICH CANNOT BE DECONTAMINATED.

RESPIRATORY PROTECTION: RESPIRATORY PROTECTION IS NOT REQUIRED UNDER CONDITIONS OF NORMAL USE. IF VAPOR OR MIST IS GENERATED WHEN THE MATERIAL IS HEATED OR HANDLED, USE AN ORGANIC VAPOR RESPIRATOR WITH A DUST AND MIST FILTER. ALL RESPIRATORS MUST BE NIOSH CERTIFIED. DO NOT USE COMPRESSED OXYGEN IN HYDROCARBON ATMOSPHERES.

VENTILATION: IF VAPOR OR MIST IS GENERATED WHEN THE MATERIAL IS HEATED OR HANDLED, ADEQUATE VENTILATION IN ACCORDANCE WITH GOOD ENGINEERING PRACTICE MUST BE PROVIDED TO MAINTAIN CONCENTRATIONS BELOW THE SPECIFIED EXPOSURE OR FLAMMABLE LIMITS.

OTHER: CONSUMPTION OF FOOD AND BEVERAGE SHOULD BE AVOIDED IN WORK AREAS WHERE HYDROCARBONS ARE PRESENT. ALWAYS WASH HANDS AND FACE WITH SOAP AND WATER BEFORE EATING, DRINKING, OR SMOKING.

6. FIRE PROTECTION INFORMATION

FLASH POINT: 410 F TEST METHOD: C.O.C.

AUTOIGNITION TEMPERATURE: > 800 F TEST METHOD: NO DATA

FLAMMABLE LIMITS IN AIR % BY VOLUME LOWER: NO DATA UPPER: NO DATA

EXTINGUISHING MEDIA: USE DRY CHEMICAL, FOAM, OR CARBON DIOXIDE.

SPECIAL FIRE FIGHTING PROCEDURES: WATER MAY BE INEFFECTIVE BUT CAN BE USED TO COOL CONTAINERS EXPOSED TO HEAT OR FLAME. CAUTION SHOULD BE EXERCISED WHEN USING WATER OR FOAM AS FROTHING MAY OCCUR, ESPECIALLY IF SPRAYED INTO CONTAINERS OF HOT, BURNING LIQUID.

UNUSUAL FIRE AND EXPLOSIVE CONDITIONS: DENSE SMOKE MAY BE GENERATED WHILE BURNING. CARBON MONOXIDE, CARBON DIOXIDE, AND OTHER OXIDES MAY BE GENERATED AS PRODUCTS OF COMBUSTION.

7. REACTIVITY DATA

STABILITY (THERMAL, LIGHT, ETC.): STABLE

CONDITIONS TO AVOID: NONE

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR

CONDITIONS TO AVOID: NONE

INCOMPATIBILITY MATERIALS TO AVOID: MAY REACT WITH STRONG OXIDIZING AGENTS.

HAZARDOUS DECOMPOSITION PRODUCTS: NONE

8. ENVIRONMENTAL PRECAUTIONS

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: CONSULT HEALTH EFFECT INFORMATION IN SECTION III, PERSONAL HEALTH PROTECTION INFORMATION IN SECTION V, FIRE PROTECTION INFORMATION IN SECTION VI, AND REACTIVITY DATA IN SECTION VII. NOTIFY APPROPRIATE AUTHORITIES OF SPILL. CONTAIN SPILL IMMEDIATELY. DO NOT ALLOW SPILL TO ENTER SEWERS OR WATERCOURSES. REMOVE ALL SOURCES OF IGNITION. ABSORB WITH APPROPRIATE INERT MATERIAL SUCH AS SAND, CLAY, ETC. LARGE SPILLS MAY BE PICKED UP USING VACUUM PUMPS, SHOVELS, BUCKETS, OR OTHER MEANS AND PLACED IN DRUMS OR OTHER SUITABLE CONTAINERS.

WASTE DISPOSAL METHOD: ALL DISPOSALS MUST COMPLY WITH FEDERAL, STATE, AND LOCAL REGULATIONS. THE MATERIAL, IF SPILLED OR DISCARDED, MAY BE A REGULATED WASTE. REFER TO STATE AND LOCAL REGULATIONS. CAUTION! IF REGULATED SOLVENTS ARE USED TO CLEAN UP SPILLED MATERIAL, THE RESULTING WASTE MIXTURE MAY BE REGULATED. DEPARTMENT OF TRANSPORTATION (DOT) REGULATIONS MAY APPLY FOR TRANSPORTING THIS MATERIAL WHEN SPILLED. WASTE MATERIAL MAY BE LANDFILLED OR INCINERATED AT AN APPROVED FACILITY. MATERIALS SHOULD BE RECYCLED IF POSSIBLE.

9. MISCELLANEOUS

HANDLING AND STORAGE REQUIREMENTS: DO NOT TRANSFER TO UNMARKED CONTAINERS. STORE IN CLOSED CONTAINERS AWAY FROM HEAT, SPARKS, OPEN FLAME, OR OXIDIZING MATERIALS. THIS PRODUCT IS NOT CLASSIFIED AS HAZARDOUS UNDER DOT REGULATIONS. FIRE EXTINGUISHERS SHOULD BE KEPT READILY AVAILABLE. SEE NFPA 30 AND OSHA 1910.106--FLAMMABLE AND COMBUSTIBLE LIQUIDS. THIS PRODUCT IS NOT A CONTROLLED SUBSTANCE UNDER THE CANADIAN WHMIS REGULATIONS.

ADDITIONAL INFORMATION: THIS MIXTURE MAY BE FORMULATED IN PART WITH COMPONENTS PURCHASED FROM OTHER COMPANIES. IN MANY INSTANCES, ESPECIALLY WHEN PROPRIETARY OR TRADE SECRET MATERIALS ARE USED, PENNZOIL COMPANY MUST RELY UPON THE HAZARD EVALUATION OF SUCH COMPONENTS SUBMITTED TO PENNZOIL BY THAT PRODUCT'S MANUFACTURER OR IMPORTER.

=====

THIS PRODUCT CONTAINS THE FOLLOWING SARA TITLE III, SECTION 313

CHEMICALS:

ZINC COMPOUNDS,

<2.5%

=====

ALL INGREDIENTS OF THIS PRODUCT ARE LISTED ON THE TOXIC SUBSTANCES CONTROL ACT (TSCA) INVENTORY.

10. PHYSICAL PROPERTIES

BOILING POINT: > 800 F	PERCENT VOLATILE: NO DATA
MELTING POINT: - 20 F	VAPOR DENSITY (AIR=1): NO DATA
APPEARANCE: CLEAR AND BRIGHT	EVAPORATION RATE (EE=1): NO DATA
ODOR: MILD PETROLEUM ODOR	SPECIFIC GRAVITY: .8723
VAPOR PRESSURE: NO DATA	MOLECULAR WEIGHT: VARIES
SOLUBILITY: SOLUBLE IN HYDROCARBONS, EMULSIFIES IN WATER	

DISCLAIMER OF WARRANTY:

THE INFORMATION CONTAINED HEREIN IS BASED UPON DATA AVAILABLE TO US, AND REFLECTS OUR BEST PROFESSIONAL JUDGEMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

CALIFORNIA CHEMICAL INVENTORY FORM - DESCRIPTION PAGE

(1) ADD DELETE REVISE NO CHANGE

PAGE (2) 5 OF 3) 6

BUSINESS NAME (4) Certified Tire Goodyear 92841
 CHEMICAL LOCATION (Address, Area, Building, etc.) (5) 9572 Chapman Ave Garden Grove
 MAP # (if more than one) (6) _____ GRID # (7) E 6

CHEMICAL NAME (8) WASTE OIL TRADE SECRET (11) Y N
 COMMON NAME (9) WASTE OIL AHM / *EHS (12) Y N
 CAS # (10) 64742-54-7
 FIRE CODE HAZARD CLASSES* (13) _____
 *IF EHS BOX IS "Y" ALL AMOUNTS MUST BE IN LBS

***COMPLETE BLOCK (13) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.**

TYPE (14) PURE MIXTURE WASTE CHECK IF RADIOACTIVE (15) (16) _____
 PHYSICAL STATE (17) SOLID LIQUID GAS CURIES _____
 FED HAZARD CATEGORIES (18) FIRE REACTIVE PRESSURE RELEASE ACUTE HEALTH CHRONIC HEALTH
 STATE WASTE CODE (19) 221 UNITS (22) GAL CU FT LBS TONS MAX DAILY AMT (23) 240
 DAYS ON SITE (20) 365 *If EHS, amounts must be in lbs. AVG DAILY AMT (24) 8-10
 LARGEST CONTAINER (21) 240 ANNUAL WASTE AMT (25) 3000
 STORAGE CONTAINER (26) ABOVE GROUND TANK - INSIDE CAN BOX(S) TANK WAGON
 UNDER GROUND TANK CARBOY CYLINDER RAIL CAR
 TANK INSIDE BUILDING SILO GLASS CONTAINER
 STEEL DRUM FIBER DRUM PLASTIC CONTAINER Other
 PLASTIC/NONMETALLIC DRUM BAG(S) IN MACHINERY OR EQUIP.
 PRESSURE STORAGE (27) AMBIENT ABOVE AMBIENT BELOW AMBIENT
 STORAGE TEMPERATURE (28) AMBIENT ABOVE AMBIENT BELOW AMBIENT CRYOGENIC

(29) % WT	(30) HAZARDOUS COMPONENTS	(31) EHS/AHM	(32) CAS #
1. <u>9.5</u>	<u>Petroleum Distillates</u>	<input type="checkbox"/> Y <input type="checkbox"/> N	<u>64742-54-7</u>
2.		<input type="checkbox"/> Y <input type="checkbox"/> N	
3.		<input type="checkbox"/> Y <input type="checkbox"/> N	

(33) **ADDITIONAL LOCALLY COLLECTED INFORMATION**
 *COMPLETE BLOCK (33) IF REQUESTED BY THE LOCAL FIRE CHIEF - REFER TO INSTRUCTIONS.

NFPA CLASSIFICATION _____

UN/DOT # 1270
 Refer to shipping papers or MSDS

DOT HAZARD CLASS 3
 Refer to shipping papers or MSDS

UFC HAZARD CLASS COMB LIQ

NFPA 704 HAZARD DIAMOND
 FIRE RED

HEALTH BLUE → 1 (HEALTH)
 → 1 (FIRE) FIRE RED
 ← 0 (REACTIVE) REACTIVE YELLOW
 SPECIAL HAZARD ↗ WHITE OX/W

MAKE AS MANY COPIES OF CHEMICAL INVENTORY FORM AS NEEDED



Material Safety Data Sheet

Page 1 of 7

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

USED MOTOR OIL

PRODUCT NUMBER(S): CPS224500

COMPANY IDENTIFICATION

Chevron USA Products Company
Environmental, Safety, and Health
Room 2900
575 Market St.
San Francisco, CA 94105-2856

EMERGENCY TELEPHONE NUMBERS

HEALTH (24 hr): (800)231-0623 or
(510)231-0623 (International)
TRANSPORTATION (24 hr): CHEMTREC
(800)424-9300 or (202)483-7616

PRODUCT INFORMATION: MSDS Requests: (800) 228-3500
Environmental, Safety, & Health Info: (415) 894-1899
Product Information: (800) 582-3835

2. COMPOSITION/INFORMATION ON INGREDIENTS

100.0 % USED MOTOR OIL

CONTAINING

COMPONENTS

AMOUNT

LIMIT/QTY

AGENCY/TYPE

MOTOR OIL, USED

100.0%

COMPOSITION COMMENT:

All the components of this material are on the Toxic Substances Control Act Chemical Substances Inventory.

TLV - Threshold Limit Value
STEL - Short-term Exposure Limit
RQ - Reportable Quantity
C - Ceiling Limit
A1-5 - Appendix A Categories

TWA - Time Weighted Average
TPQ - Threshold Planning Quantity
PEL - Permissible Exposure Limit
CAS - Chemical Abstract Service Number
() - Change Has Been Proposed

Revision Number: 6

Revision Date: 03/15/94

MSDS Number: 001793

3. HAZARDS IDENTIFICATION

***** EMERGENCY OVERVIEW *****

Dark brown to black liquid.

- USED MOTOR OIL HAS CAUSED CANCER IN LABORATORY ANIMALS
- PROLONGED INHALATION OF VAPOR MAY BE HARMFUL
- KEEP OUT OF REACH OF CHILDREN

POTENTIAL HEALTH EFFECTS

EYE:

This substance is not expected to cause prolonged or significant eye irritation.

SKIN:

This substance is not expected to cause prolonged or significant skin irritation. If absorbed through the skin, this substance is considered practically non-toxic to internal organs. Read the Toxicology Information section (11) of this document for more information.

INGESTION:

If swallowed, this substance is considered practically non-toxic to internal organs.

INHALATION:

Prolonged breathing of aerosol can cause respiratory irritation.

SIGNS AND SYMPTOMS OF EXPOSURE:

INHALATION: Respiratory tract irritation may include, but may not be limited to, one or more of the following: nasal discharge, sore throat, coughing, bronchitis, pulmonary edema and difficulty in breathing.

4. FIRST AID MEASURES

EYE:

No first aid procedures are required. However, as a precaution flush eyes with fresh water for 15 minutes. Remove contact lenses if worn.

SKIN:

Remove contaminated clothing. Wash skin thoroughly with soap and water. See a doctor if any signs or symptoms described in this document occur. Discard contaminated non-waterproof shoes and boots. Wash contaminated clothing.

INGESTION:

If swallowed, give water or milk to drink and telephone for medical advice. Consult medical personnel before inducing vomiting. If medical advice cannot be obtained, then take the person and product container to the nearest medical emergency treatment center or hospital.

INHALATION:

If respiratory discomfort or irritation occurs, move the person to fresh air. See a doctor if discomfort or irritation continues.

USED MOTOR OIL

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES

FLASH POINT: NDA

AUTOIGNITION: NDA

FLAMMABILITY LIMITS (% by volume in air): Lower: NDA Upper: NDA

EXTINGUISHING MEDIA:

CO₂, dry chemical, foam and water fog.

NFPA RATINGS: Health 1; Flammability 1; Reactivity 0.

FIRE FIGHTING INSTRUCTIONS:

For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment. This may include self-contained breathing apparatus to protect against the hazardous effects of normal products of combustion or oxygen deficiency. Read the entire document.

COMBUSTION PRODUCTS:

Normal combustion forms carbon dioxide, water vapor and may produce oxides of sulfur, nitrogen and phosphorous. Incomplete combustion can produce carbon monoxide.

6. ACCIDENTAL RELEASE MEASURES

CHEMTREC EMERGENCY NUMBER (24 hr): (800)424-9300 or (202)483-7616

ACCIDENTAL RELEASE MEASURES:

This material is considered to be a water pollutant and releases of this product should be prevented from contaminating soil and water and from entering drainage and sewer systems.

U.S.A. regulations require reporting spills of this material that could reach any surface waters. The toll free number for the U.S. Coast Guard National Response Center is (800) 424-8802.

Stop the source of the leak or release. Clean up releases as soon as possible, observing precautions in Exposure Controls/Personal Protection. Contain liquid to prevent further contamination of soil, surface water or groundwater. Clean up small spills using appropriate techniques such as sorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Follow prescribed procedures for reporting and responding to larger releases.

7. HANDLING AND STORAGE

HANDLING AND STORAGE:

No data available.

USED MOTOR OIL

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

PERSONAL PROTECTIVE EQUIPMENT

EYE/FACE PROTECTION:

No special eye protection is usually necessary.

SKIN PROTECTION:

Avoid contact with skin or clothing. Skin contact should be minimized by wearing protective clothing including gloves.

RESPIRATORY PROTECTION:

Unless ventilation is adequate to keep airborne concentrations below recommended exposure standards, approved respiratory protection should be worn.

ENGINEERING CONTROLS:

Use adequate ventilation to keep the airborne concentrations of this material below the recommended exposure standard.

9. PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL DESCRIPTION:

Dark brown to black liquid. #

pH: NDA

VAPOR PRESSURE: NDA

VAPOR DENSITY

(AIR=1):

BOILING POINT: NDA

FREEZING POINT: NDA

MELTING POINT: NDA

SOLUBILITY: Soluble in petroleum solvents.

SPECIFIC GRAVITY: NDA

DENSITY: NDA

EVAPORATION RATE: NDA

PERCENT VOLATILE (VOL): NDA

10. STABILITY AND REACTIVITY

HAZARDOUS DECOMPOSITION PRODUCTS:

NDA

CHEMICAL STABILITY:

Stable.

CONDITIONS TO AVOID:

No data available.

INCOMPATIBILITY WITH OTHER MATERIALS:

May react with strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

HAZARDOUS POLYMERIZATION:

Polymerization will not occur.

USED MOTOR OIL

11. TOXICOLOGICAL INFORMATION

EYE EFFECTS:

The Draize Eye Irritation Score (range, 0-110) in rabbits is 1.33/110.

SKIN EFFECTS:

The Draize Skin Primary Irritation Score (range, 0-8) for a 4-hour exposure (rabbits) is 0.46. The dermal LD50 in rabbits is greater than 5 ml/kg.

ACUTE ORAL EFFECTS:

The oral LD50 in rats is > 25 ml/kg.

ACUTE INHALATION EFFECTS:

No product toxicology data available. The hazard evaluation was based on data from similar materials.

ADDITIONAL TOXICOLOGY INFORMATION:

In laboratory tests sponsored by the American Petroleum Institute (API), mice developed skin cancer following repeated application of and continuous skin exposure to used motor oils with no effort made to remove oil between applications. Brief or intermittent skin contact with used motor oils is not expected to have serious effects if the material is thoroughly removed by washing with soap and water. While skin cancer is unlikely to occur in humans from the handling of used motor oil, skin contact should be reduced to a minimum by following the precautions outlined in this MSDS.

This product gave positive results in the following mutagen testing assays: Ames assay.

12. ECOLOGICAL INFORMATION

ECOTOXICITY:

No data available.

ENVIRONMENTAL FATE:

No data available.

13. DISPOSAL CONSIDERATIONS

DISPOSAL CONSIDERATIONS:

Used oil collection services and collection centers can safely receive used motor oil for recycling or disposal. Some service stations, automotive service centers, and retailers provide used motor oil collection facilities.

Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

14. TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT SHIPPING NAME: NOT DESIGNATED AS A HAZARDOUS MATERIAL BY THE
FEDERAL DOT

DOT HAZARD CLASS: NOT APPLICABLE

DOT IDENTIFICATION NUMBER: NOT APPLICABLE

DOT PACKING GROUP: NOT APPLICABLE

15. REGULATORY INFORMATION

SARA 311 CATEGORIES:

1. Immediate (Acute) Health Effects:	NO
2. Delayed (Chronic) Health Effects:	YES
3. Fire Hazard:	NO
4. Sudden Release of Pressure Hazard:	NO
5. Reactivity Hazard:	NO

REGULATORY LISTS SEARCHED:

01=SARA 313	11=NJ RTK	22=TSCA Sect 5(a)(2)
02=MASS RTK	12=CERCLA 302.4	23=TSCA Sect 6
03=NTP Carcinogen	13=MN RTK	24=TSCA Sect 12(b)
04=CA Prop 65-Carcin	14=ACGIH TWA	25=TSCA Sect 8(a)
05=CA Prop 65-Repro Tox	15=ACGIH STEL	26=TSCA Sect 8(d)
06=IARC Group 1	16=ACGIH Calc TLV	27=TSCA Sect 4(a)
07=IARC Group 2A	17=OSHA PEL	28=Canadian WHMIS
08=IARC Group 2B	18=DOT Marine Pollutant	29=OSHA CEILING
09=SARA 302/304	19=Chevron TWA	30=Chevron STEL
10=PA RTK	20=EPA Carcinogen	

None of the components of this material are found on the regulatory lists indicated.

16. OTHER INFORMATION

NFPA RATINGS: Health 1; Flammability 1; Reactivity 0;
(Least-0, Slight-1, Moderate-2, High-3, Extreme-4). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT:

This Material Safety Data Sheet has been revised to comply with the

USED MOTOR OIL

ANSI Z400.1 Standard. Changes have also been made throughout this MSDS. Please read the entire document.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modification of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.

GARDEN GROVE



FIRE DEPARTMENT

HAZARDOUS MATERIALS DISCLOSURE PROGRAM

REPORTING FORMS PACKET: PART 2

BUSINESS EMERGENCY PLAN SHORT VERSION

**THE FOLLOWING FORMS ARE FOR USE IN THE EVENT OF AN
ACTUAL OR THREATENING HAZARDOUS MATERIALS
EMERGENCY.**

**FILL THESE FORMS OUT COMPLETELY AND BE READY TO
HAND THEM TO THE FIRE DEPARTMENT PERSONNEL WHEN
THEY ARRIVE AT THE EMERGENCY SCENE.**

IN THE EVENT OF AN EMERGENCY,

CALL 911

**GARDEN GROVE FIRE DEPARTMENT
HAZARDOUS MATERIALS DISCLOSURE PROGRAM**

BUSINESS EMERGENCY PLAN

Personnel Emergency Notifications and Responsibilities

Employee Evacuation and Staging Areas:

1. The type of alarm signal that will be used to initiate an evacuation at the facility:
(vocal, paging system, manual alarm, etc.)

Vocal

2. All employees shall be trained to evacuate the facility through at least one exit. Alternate exit routes shall be designated if available. ✓
3. Staging areas shall be designated for all employees. Staging areas will be the location that all employees shall report to in the event of an emergency. ✓

One person shall be designated to account for all personnel at the staging area. That person will be responsible for meeting the incoming Fire units and reporting the conditions known about the incident. ✓

The Staging area is at the following location as shown on your site plan map.

A1 @ L9

Employee Responsibilities:

At least one employee shall be responsible for the following minimum requirements in the event of an emergency response by the Fire Department.

1. Notify employees. Initiate evacuation procedures. Mgr
2. Notify the Garden Grove Fire Department. Dial 911 Mgr
3. Try to identify the nature of the incident. Mgr
4. Report to the staging area and account for evacuated employees. Mgr
5. Report to the incoming fire units. Mgr
6. Activate any emergency mitigation procedures that are available at your business. (List below any mitigation procedures specific to your business, if any.)

None @ This Time

GARDEN GROVE FIRE DEPARTMENT HAZARDOUS MATERIALS DISCLOSURE PROGRAM

BUSINESS EMERGENCY PLAN

Personnel Emergency Notifications and Responsibilities

Prevention

All materials are stored, used and handled within the guidelines of the Uniform Fire Code, N.F.P.A. standards, California Administrative Code, Titles 19 and 20.

This section is meant to initiate a Prevention Plan at your business and to assist in preventing a release, or threatened release, of a hazardous material. In the spaces provided, place a checkmark by the preventive actions which have been initiated by your business to abate hazards relating to hazardous material handling, use of storage.

Consideration shall include:

1. Drum storage and/or above ground tank storage areas:
 - a Isolation and separation of incompatible materials
 - b Diking areas to contain spills
 - c Storage on paved ground
2. Compressed and/or cryogenic gas storage areas:
 - a Cylinders stored upright and secured
 - b Isolation and/or separation of incompatible cylinders (oxygen and flammable gases, etc.)
3. General:
 - a Safe work practices are exercised in daily routines.
 - b Employees who handle hazardous materials are properly trained.
 - c Material Safety Data Sheets (MSDS) readily available for each hazardous material on the premises.
 - d Labeling of all materials and storage areas with the product name and hazards associated with the product (drums, piping, tanks, etc.)
 - e Uniform Fire Code (UFC) requires separation between outside hazardous material storage area or tanks and combustible materials (wood, bush, etc.)
 - f Posting of "No Smoking" signs where appropriate.

GARDEN GROVE FIRE DEPARTMENT

BUSINESS EMERGENCY PLAN

A BUSINESS IS REQUIRED BY LAW TO NOTIFY THE GARDEN GROVE FIRE DEPARTMENT WITHIN 30 DAYS OF ANY OF THE FOLLOWING EVENTS:

1. Change of business address.
2. Change of business ownership
3. Change of business name
4. Cessation of business operation (quitting business)
5. Use or handling of a previously undisclosed hazardous material
6. A 100% increase in the quantity of a previously disclosed hazardous material

Your business is required by State law to retain a copy of this entire Business Plan, chemical inventory, material safety data sheets and site maps, for review by Fire Department personnel. State where your disclosure and Emergency Business Plan will be kept.

Show room @ Counter w/ MSDS Logs SEE
MSDS on Site Plan. (B 4 1/2)

Show location on site map also using symbol in the legend.

Note: A fee is charged for a replacement copy from the Garden Grove Fire Department.

I CERTIFY, UNDER PENALTY OF PERJURY, THAT THE ENCLOSED INFORMATION IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE.

SIGNATURE: _____

NAME: _____

TITLE: _____

DATE: _____



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: Certified Tire Telephone: 714 636-2263
Site Address: 9572 Chapman Ave Garden Grove CA Zip Code: 92841

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review **AND** certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes):

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name Michele Schoof

Signature Michele Schoof

Job Title Business Mgr.

Date 4/24/01



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: CERTIFIED TIRE Telephone: 636-2263
Site Address: 9572 CHAPMAN Zip Code: 92841

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes.)

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name JOHN JACKSON

Signature [Signature]

Job Title STORE MANAGER

Date 12-14-05



**GARDEN GROVE FIRE DEPARTMENT
ENVIRONMENTAL PROTECTION SECTION**

11301 Acacia Parkway
Garden Grove, CA 92840
Business: 714 741-5600 Haz Mat: 714 741-5636

**Hazardous Materials Business Emergency Plan And
Inventory Certification Statement**

Business Name: CERTIFIED TIRE Telephone: 714 636 2263
Site Address: 9572 CHAPMAN AVE Zip Code: 92841

The California Health & Safety Code, Division 20, Chapter 6.95, Section 25505(c) and Section 25503.3(c) provide the following:

A business that handles hazardous materials shall review AND certify their Hazardous Materials Business Emergency Plan (HMBEP) once every three years from the date of acceptance by the Garden Grove Fire Department. A business may comply with the annual chemical inventory reporting requirement by submitting a certification statement to the Garden Grove Fire Department. **A business may not utilize this certification to meet the annual inventory submission requirements of the Emergency Planning and Community Right to Know Act (Section 11022, Title 42, United States Code).**

Note: A business may comply with the annual inventory reporting requirements using this certification statement if both of the following apply:

1. The business has previously filed an inventory reporting form and;
2. The business attests to the following:
 - The information contained in the annual inventory form most recently submitted to the Garden Grove Fire Department is complete, accurate, and up to date.
 - There has been no change in the quantity of any hazardous material as reported in the most recently submitted annual inventory form.
 - No hazardous material subject to the inventory requirements is being handled that is not listed on the most recently submitted annual inventory form.

THIS IS TO CERTIFY THAT THE HMBEP AND/OR CHEMICAL INVENTORY HAS BEEN REVIEWED.
(Please check applicable boxes.)

- No changes are required to the HMBEP submitted to the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the HMBEP. The changes/revisions are attached to this certification.
- No changes are required to the chemical inventory that was previously on file with the Garden Grove Fire Department.
- All the necessary changes/revisions have been made to the chemical inventory. The changes/revisions are attached to this certification.

AS AN AUTHORIZED REPRESENTATIVE, I CERTIFY UNDER PENALTY OF LAW THAT I HAVE PERSONALLY EXAMINED AND AM FAMILIAR WITH THE INFORMATION SUBMITTED AND BELIEVE THE INFORMATION IS TRUE, ACCURATE, AND COMPLETE.

Print Name Jaimo Ortega Jr

Job Title Store Mgr

Signature [Signature]

Date 6/10/08



Facility Information 4.5.1

Card 4 of 603



NAME Certified Tire & Service **OWNER** Jeff

DEPT/DIV **FIRST** Darrow

STREET 9572 Chapman Ave **LAST** 23900 Alessandro Blvd, Suite #D

CITY Garden Grove **STREE** Moreno Valley

STATE CA **CIT** CA **POSTAL**

ID NO. cc60 **INDUSTRY** **CLASS** **LAT** **LONG**

DISTRICT

MAP LINK **MODIFICATION DATE** 3/2/0



» Information Tracking »

	REQUESTED	RECEIVED	NEXT DUE	RECORD LOCATION
FACILITY INFORMATION				
CHEMICAL LIST				
CHEMICAL INVENTORY				
TOXIC RELEASE INVENTORY				
SPILL REPORT FOLLOW UP				
MATERIAL SAFETY DATA SHEETS				

J. Shirley
3-6-00



Chemical Inventory 4.5.1



Card of 3193



NAME Certified Tire & Service
 DEPT/DIV
 STREET 9572 Chapman Ave
 CITY Garden Grove
 STATE CA POSTAL CODE
 ID NO. cc60 IND.
 DISTRICT REPORTING PERIOD

CHEMICAL NAME Antifreeze

CAS NUMBER

LINKED TO CODEBREAKER

EHS CHEMICAL No

TRADE SECRET No

PURE FIRE STORED NEAR BOILING POINT?

MIXTURE PRESSURE

SOLID REACTIVE SOLID FORM

LIQUID IMMEDIATE MATERIAL SAFETY SHEET

GAS DELAYED

MAX DAILY AMOUNT 0.1 Gallons

AVE DAILY AMOUNT 0.1 Gallons

MAX QUANTITY IN 1 VESSEL Code

CONCENTRATION (WEIGHT PERCENT)

DIKED AREA

DAYS ON SITE 365

ENTERED 3/3/0 MODIFICATION DATE 3/3/0

» Storage » Confidential

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	1-6	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>

» Components »

COMPONENTS	CAS NUMBERS
Ethylene Glycol 8.82%	107-21-1
Sodium Hydroxide	1310-73-2
Dioxane	123-91-1



Chemical Inventory 4.5.1



Card of



NAME Certified Tire & Service
 DEPT/DIV _____
 STREET 9572 Chapman Ave
 CITY Garden Grove
 STATE CA POSTAL CODE _____
 ID NO. cc60 IND. _____
 DISTRICT _____ REPORTING PERIOD _____

CHEMICAL NAME Automatic Transmission Fluid

CAS NUMBER _____

LINKED TO CODEBREAKER

EHS CHEMICAL No

TRADE SECRET No

PURE MIXTURE FIRE PRESSURE STORED NEAR BOILING POINT?

SOLID REACTIVE LIQUID IMMEDIATE SOLID FORM _____

GAS DELAYED MATERIAL SAFETY SHEET _____

MAX DAILY AMOUNT 0.2 Gallons

AVE DAILY AMOUNT 0.1 Gallons

MAX QUANTITY IN 1 VESSEL _____ Code

CONCENTRATION (WEIGHT PERCENT) _____

DIKED AREA _____

DAYS ON SITE 365

ENTERED 3/3/0 MODIFICATION DATE 3/3/0

» Storage » Confidential

A	1	4	←	⊖	E-5	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←	⊖		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←	⊖		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←	⊖		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←	⊖		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←	⊖		<input type="checkbox"/>

» Components »

COMPONENTS	CAS NUMBERS
Petroleum Distillates 70-85%	647-42-65
Various 10-25%	



Chemical Inventory 4.5.1



Card of



NAME Certified Tire & Service
 DEPT/DIV _____
 STREET 9572 Chapman Ave
 CITY Garden Grove
 STATE CA POSTAL CODE _____
 ID NO. cc60 IND. _____
 DISTRICT _____ REPORTING PERIOD _____

CHEMICAL NAME Motor Oil

CAS NUMBER _____

LINKED TO CODEBREAKER

EHS CHEMICAL No

TRADE SECRET No

PURE FIRE STORED NEAR BOILING POINT? _____

MIXTURE PRESSURE

SOLID REACTIVE SOLID FORM _____

LIQUID IMMEDIATE MATERIAL SAFETY SHEET _____

GAS DELAYED

MAX DAILY AMOUNT 02 Gallons

AVE DAILY AMOUNT 02 Gallons

MAX QUANTITY IN 1 VESSEL _____ Code

CONCENTRATION (WEIGHT PERCENT) _____

DIKED AREA _____

DAYS ON SITE 365

ENTERED 3/3/0 MODIFICATION DATE 3/3/0

» Storage » Confidential

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<u>D-6</u>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>

» Components »

COMPONENTS	CAS NUMBERS
Hydrotr. Paraffinic Petrol. Dist.	64742-54-7
Solvent hvv Paraf. Petr. Dist.	64742-65-0
Alkylbenzene Sulfonates	



Chemical Inventory 4.5.1



Card of



NAME Certified Tire & Service
 DEPT/DIV
 STREET 9572 Chapman Ave
 CITY Garden Grove
 STATE CA POSTAL CODE
 ID NO. cc60 IND.
 DISTRICT REPORTING PERIOD

CHEMICAL NAME Waste Oil

CAS NUMBER

LINKED TO CODEBREAKER

EHS CHEMICAL No

TRADE SECRET No

PURE FIRE STORED NEAR BOILING POINT?
 MIXTURE PRESSURE

SOLID REACTIVE SOLID FORM

LIQUID IMMEDIATE MATERIAL SAFETY SHEET
 GAS DELAYED

MAX DAILY AMOUNT 02 Gallons

AVE DAILY AMOUNT 01 Gallons

MAX QUANTITY IN 1 VESSEL Code

CONCENTRATION (WEIGHT PERCENT)

DIKED AREA

DAYS ON SITE 365

ENTERED 3/3/0 MODIFICATION DATE 3/3/0

» Storage » Confidential

A	1	4	←	E-6	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←		<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	←		<input type="checkbox"/>

» Components »

COMPONENTS	CAS NUMBERS
Petroleum Distillates 9.5%	64742-54-7
.....
.....



Contacts 45.1



LAST NAME Darrow FIRST Jeff

POSITION Owner

FACILITY/ORG Certified Tire & Service ID NO. cc60

STREET 9572 Chapman Ave

CITY Garden Grove

STATE CA POSTAL CODE

.....

DISTRICT

.....

MAP LINK

MODIFICATION 3/3/0

» Comments »

John Jackson, Store Manager: Business phone
24-hour phone

